



The Floor is Yours

PRODUCT OVERVIEW 2011-2012

THE FOUNDATION

CONTENTS

About Desso	3
Our innovation strategy	5
Creativity	6
CARPETECTURE®	7
Circles of Architects®	7
Functionality	8
DESSO AirMaster®	9
DESSO SoundMaster®	10
Cradle to Cradle®	13
DESSO EcoBase®	15
Our business segments	16
The Foundation	21
About this catalogue	21
Overview of the symbols	22
Carpet tiles	24
Broadloom	112
Woven	176
Custom Made	186

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit our website: www.desso.com

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. Desso © 2011.

ABOUT DESSO®

Desso focuses primarily on superior floor design and Cradle to Cradle®, in providing high quality carpet tiles and broadloom. It's commercial product offering, business carpets, represents more than half of total sales and can be found in offices, banks, retail units, public buildings, schools, universities and care centers. Clients include Allianz, Canon, EDF, HSBC, Porsche, Procter & Gamble, SNCF, Nestlé and many more.

Desso's innovation strategy is concentrated in 3 key areas: Creativity, Functionality and Cradle to Cradle®. For Desso, creativity is synonymous with CARPETECTURE®, which is a powerful example of Desso's commitment to creative carpet design and its dedication to meet the needs of architects, interior designers, building owners and end users. In the field of functionality, Desso develops pioneering solutions that make a difference for health, wellness and well-being. As a result of this innovation and creativity strategy, Desso has launched a number of patented products like DESSO AirMaster®, for 8 times lower fine-dust concentration in the air (versus hard floors), and DESSO EcoBase®, which enabled the world's first and only Cradle to Cradle® Silver Certification for an entire carpet tile product.

Desso Consumer Carpets is represented by three strong brands: Parade, Bonaparte and Desso. All with a rich history in manufacturing high-end consumer carpets where products are available through specialist retail traders, plus selected carpet stores and home furnishing shops. Desso Consumer Carpets is the only European high end consumer carpet company with sales in Benelux, Germany, France, Switzerland and Austria.

Desso's creative carpet design and service oriented approach means that it has become a leader in developing solutions for the Hospitality, Marine and Aviation (HMA) markets. Desso's HMA division works with companies such as Hilton, Intercontinental, Maritime, KLM, Virgin, Royal Caribbean Cruise Lines and Holland America Line.

Desso Sports Systems is a leading player in the provision of artificial turf for sports fields and reinforced natural grass systems that provide the perfect surface at every level of sport. Our product range includes DESSO GrassMaster®, a sports field of 97% natural grass reinforced with Desso synthetic grass fibres.

Cradle to Cradle®

In signing a partnership agreement with the Hamburg-based Environmental Protection Encouragement Agency (EPEA), Desso has become the first carpet manufacturer in EMEA to adopt the Cradle to Cradle® design. It marks Desso's radical decision to move beyond 'mere' sustainability in producing its carpets and artificial grass. In the Cradle to Cradle® principles, products are made from pure components that are easy to disassemble, in order to create new products (= up-cycling) in both the biological and technical cycles.

Today, Desso can look back on almost 80 years of proven performance, having built a reputation as a leading manufacturer of high quality carpet tiles, broadloom and artificial grass pitches. Desso has four factories and two major distribution centres in Europe, as well as specialist customer service centres throughout Europe, in America, Asia, Latin America, Africa, the Middle East and Australia.

For more information visit www.desso.com



OUR INNOVATION STRATEGY

Desso focuses on continuous innovation and renovation of its products to assure customer focus.

Our innovation strategy is concentrated in 3 key areas:

- Creativity: Spearheaded by Desso's design philosophy CARPETECTURE® and our international concept Circles of Architects®.
- Functionality: Pioneering solutions that make a difference, examples include DESSO SoundMaster® and DESSO AirMaster®.
- Cradle to Cradle®: Developing products and processes that will contribute towards a better environment such as DESSO EcoBase®.



CREATIVITY

We are committed to extending the boundaries of what is achievable. We are constantly striving to create new and improved products and services which provide even better answers to our customers' needs. Our creative strategy is spearheaded by our design philosophy CARPETECTURE® and our international phenomenon Circles of Architects®.

CARPETECTURE®

This is a new way of thinking, incorporating elements from modern international architecture to create emotionally expressive carpet designs. It looks at the changes in architecture, in how people think about space, atmosphere, colours and materials. CARPETECTURE® collections focus on design and the architectural link between the interior and the flooring.

As part of the CARPETECTURE® theme, Desso has several collections: Pure Lines, Core Structures and Colour Dimensions I & II. Contact your local Desso representative if you wish to receive these inspirational brochures or visit our web-site: www.desso.com.

Circles of Architects®

For Desso, innovation is central in everything we do. Creativity is the first driver of innovation and to remain innovative, we include our key decision makers (Architects & Designers) for input in our design process. This approach has led to a more formalized testing procedure in the form of multiple focus groups of leading architects and interior designers.

Desso Circles of Architects® is an international phenomenon first initiated in 2007. The Circles of Architects® members also make use of our online community, where inspiration and trends are discussed and created. For more information, contact your local Desso representative or visit www.circles-of-architects.com.



DESSO AirMaster®



2010:
good industrial
design

FUNCTIONALITY

We develop pioneering solutions that make a difference. We demonstrate how carpets can improve our quality of life, much more than on an aesthetic level alone.

DESSO AirMaster® - the carpet that cleans the air

The air that we breathe has a crucial effect on our health and well-being. The presence and size of particulate matter or fine dust is a determining factor in air quality and is directly linked to potential health problems. Once inhaled, they can affect the heart and lungs and cause serious physiological problems (e.g. changes in lung function or inflammation markers). Extensive evidence from the World Health Organization (WHO) indicates that concentrations of fine dust currently found in most cities in developed countries around the world results in a serious health risk¹.

According to a study performed by the German Allergy and Asthma Association (DAAB)², it is proven that the burden from fine dust is dramatically reduced when using carpet, as opposed to hard flooring. With the introduction of DESSO AirMaster® this functionality is taken to the next level. Its patented³ technology has been specially developed to capture and retain hazardous particulate matter. In fact, DESSO AirMaster® is 8 times more effective in capturing and retaining fine dust than hard flooring and 4 times more effective than standard carpet solutions (PM₁₀)⁴.

Contact your local Desso representative for more information on DESSO AirMaster® - the most effective flooring solution to capture fine dust from the air.

1 Source: World Health Organization Air quality guidelines for particulate matter, global update 2005.

2 Source: Study performed by Deutscher Allergie- und Asthmabund e.V. in 2005.


3 Patent pending: NL 2002808


4 Based on tests performed by GUI, with DESSO AirMaster® versus standard PVC hardfloor and versus standard structured loop pile carpet.

Hard floor

DESSO AirMaster®

Breathing zone

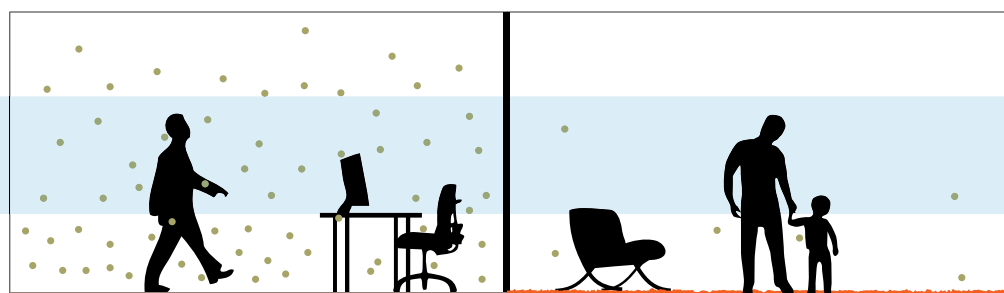

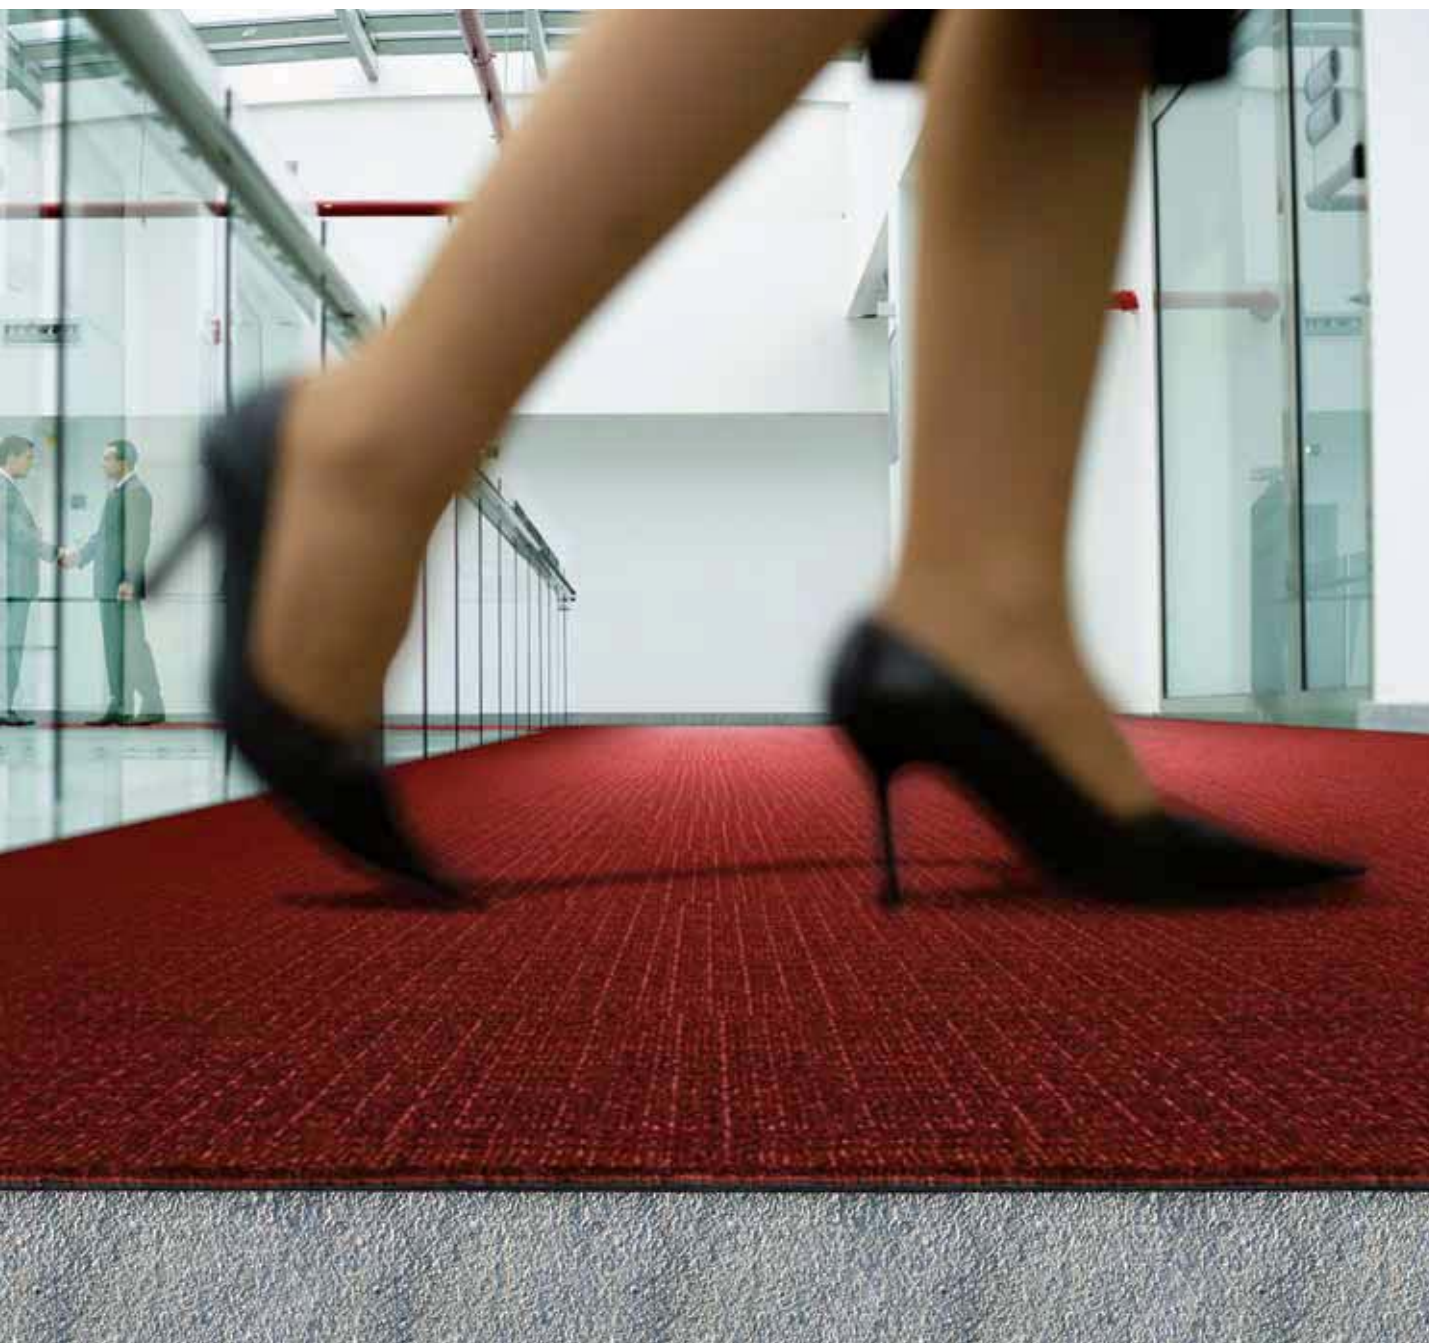

DESSO SoundMaster®

DESSO SoundMaster® - for improved sound reduction and acoustics.


Noise need not be excessively loud to cause problems in the workplace, such as (chronic) hearing loss, stress, voice problems, cardiovascular problems, decreased learning ability and longer patient recovery periods. Workplaces, however, are not the only areas affected by noise. Noise in schools is perceived as a disturbing factor impeding the transfer of knowledge, which is mainly based on verbal communication. Teachers try to compensate for the noisy background by raising their voice. As a result, noise levels in the classroom become progressively higher and teachers not only suffer higher mental and emotional strain, but vocal chord disorders as well.

DESSO SoundMaster® is the optimal solution for improved sound reduction and acoustics. DESSO SoundMaster® offers an impact sound reduction value of at least + 10 dB in addition to the standard value, thereby setting a new industry standard in carpet performance. In addition, it offers a 60% improvement in acoustical performance in comparison to our standard carpet designs.

DESSO SoundMaster® can contribute to an optimized acoustical performance in offices, schools, hospitals and other commercial applications. The particular layer construction (see figure 1) is uniquely designed to offer optimal sound absorption and insulation. The backing is made from 100% polyester (40% recycled) and is specifically chosen for its advanced sound insulation and absorption properties.

Contact your local Desso representative for more information on our DESSO SoundMaster® solution.

DESSO SoundMaster® carpet tile

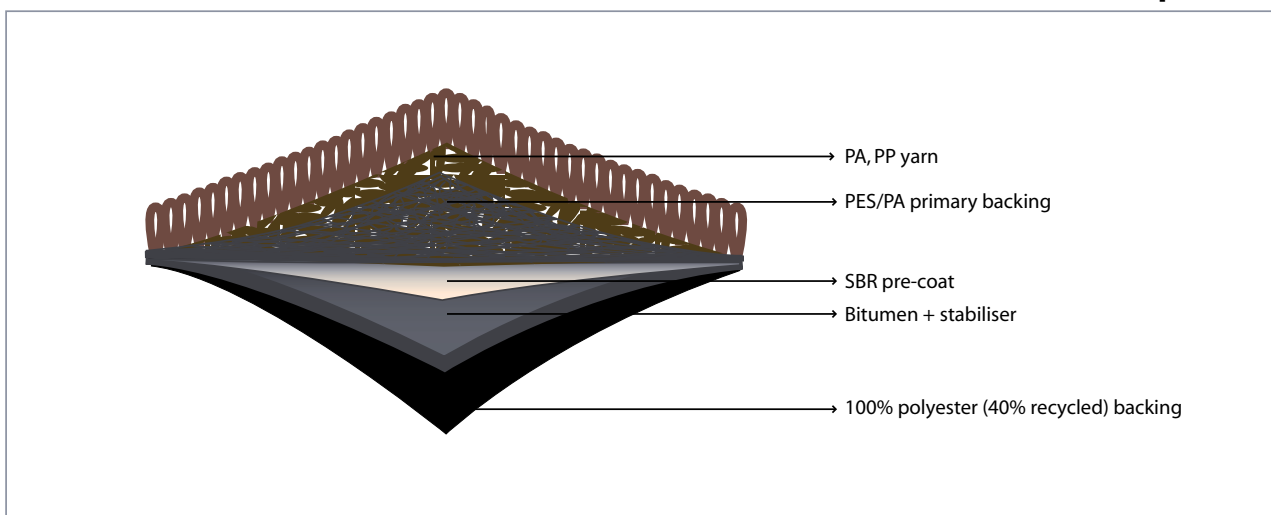



CRADLE TO CRADLE

Desso has signed a partnership agreement with the Environmental Protection Encouragement Agency (EPEA). By doing so, Desso has become the first carpet manufacturer in EMEA to adopt Cradle to Cradle® design. This marks Desso's radical decision to move beyond 'mere' sustainability in producing its carpets and artificial grass.

What is Cradle to Cradle®?

Cradle to Cradle® takes its inspiration from nature, where recycling is universal – where everything is reborn again and again in a perpetual cycle of re-use. Everything in nature provides essentially the building blocks and nutrients of the next generation. In the Cradle to Cradle® principles, products are made from pure components that are easy to disassemble, in order to create new products (= up-cycling) in both the biological and technical cycles.

DESSO Take Back™

While carpets may be recyclable, it is vital to ensure that the recycling actually takes place. Under our Cradle to Cradle® commitment, we have introduced our DESSO Take Back™ programme where we collect used carpets from our customers, thus ensuring that they can be properly reprocessed.

Within the Cradle to Cradle® concept, it is vital that every part of our carpets and carpet tiles will be completely integrated into a technical or biological cycle. Currently we are recycling our bitumen backing in the road and roofing industry, whilst our Cradle to Cradle® silver certified DESSO EcoBase® backing is separated from the yarn and safely recycled within our own production process (for more information see following page).

DESSO Take Back™ programme has received funding from the European Union.





DESSO EcoBase®

Inspired by nature's perpetual cycles of development, replacement and rebirth, DESSO EcoBase® products bear the true identity of the Cradle to Cradle® philosophy. DESSO EcoBase® is a backing specifically designed with disassembly and recycling in mind and is a significant step forward. Due to its innovative composition, DESSO EcoBase® is fully recyclable in our own production process.

With the launch of DESSO EcoBase® we have achieved Cradle to Cradle® Silver Certification for an entire carpet tile, thereby reaching a level where 97% of all our materials are positively defined*. Desso is proud to be the only carpet tile manufacturer in the world to have achieved Cradle to Cradle® Silver Certification for an entire carpet tile product.

* Positively defined = all ingredients have been assessed as either Green (optimal) or Yellow (tolerable)



2010:
good industrial
design


15

DESSO Refinity®

At the heart of our pioneering DESSO EcoBase® backing is the desire to create a product which can be dismantled for easier re-use of its components and materials. That is why, as part of our multi-million euro investment project, we have developed DESSO Refinity®, an innovative separation technique enabling the yarn and other fibres to be separated from the backing. This produces two material streams which can then be recycled. In addition, the post consumer DESSO EcoBase® backing is 100% safely recyclable.

After an additional purification stage, the yarn is converted back to the basic material and returned to the yarn manufacturers for production of new yarn. Due to its innovative composition, DESSO EcoBase® can be fully recycled in our own production process after separation.

This results in a continuous technical cycle. Contact your local Desso representative for more information on DESSO EcoBase®, DESSO Refinity® or the DESSO Take Back™ programme.

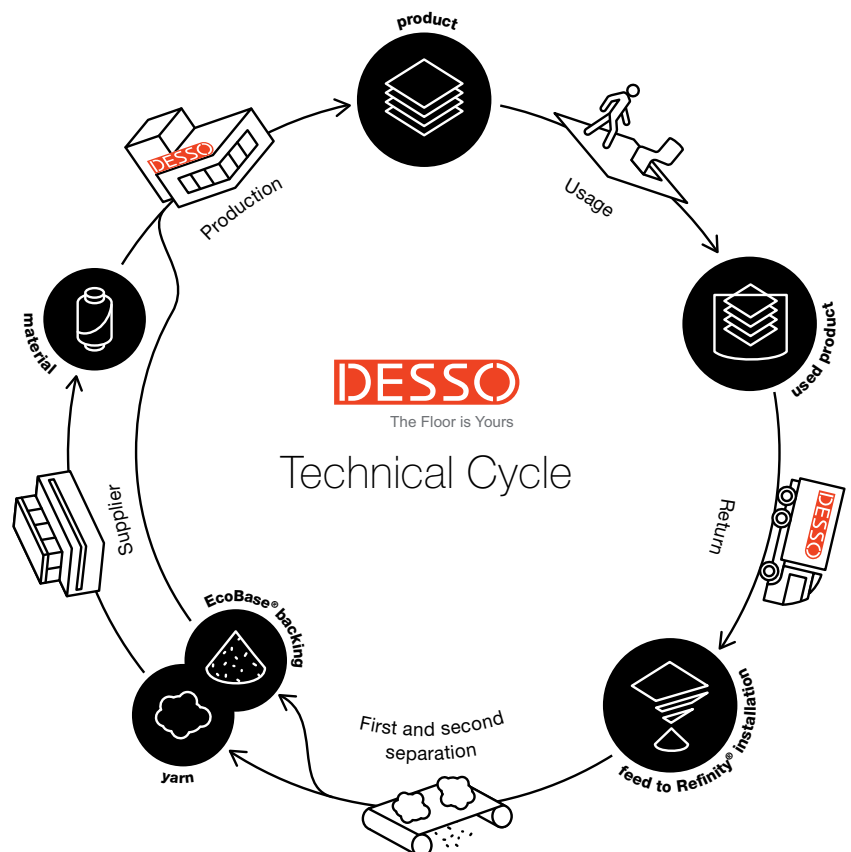

OUR BUSINESS SEGMENTS



BUSINESS

The Desso Business Carpets division is a leading European manufacturer of high quality, durable business carpets and carpet tiles for commercial applications such as offices, banks, retail units, public buildings, schools, universities and care centres. Desso is committed to delivering superior products in terms of quality, durability and design through continuous innovation.



EDUCATION

Studies of high performance schools have found that academically successful establishments radiate a sense of well-being. Carpet can help to create appealing and attractive school environments where teachers want to teach, and students want to learn. Furthermore, Desso carpets have been shown to improve indoor air quality, which is of vital importance to students with asthma or allergies, and improve acoustics, impacting both student learning ability and teacher stress levels.

HEALTHCARE

Patient comfort is crucial to health and recuperation. Improved surroundings can result in a faster return to health, which is of utmost importance on wards where beds are limited and nurses are stretched. In addition, the improved indoor air quality and acoustics created by Desso's carpet solutions are scientifically proven to result in cleaner, healthier, more relaxed environments. Happier patients, happier staff.



CONSUMER

Desso Consumer Carpets is represented by three strong brands; Parade, Bonaparte and Desso. All with a rich history in manufacturing high-end consumer carpets where products are available through specialist retail traders, plus selected carpet stores and home furnishing shops. Desso Consumer Carpets is the only European high end consumer carpet company with sales in Benelux, Germany, France, Switzerland and Austria.





HOSPITALITY

Desso has an established reputation for supplying 4 and 5 star hotel chains and privately owned hotels with products that meet functional demands while at the same time enhancing interior environments. The wide Desso product range offers quality carpeting readily available from stock. Desso supplies high quality Axminster and Wilton custom designed carpets.

Accurate colour matches are assured by our full spectrum POM box palette. This handy reference box displays the authoritative full colour spectrum Desso offers, with accurate, numbered colour poms which are removable for easy colour matching and planning for hospitality professionals.



MARINE

For more than two decades we have been enjoying a global reputation for the superlative custom made and stock selection of floor coverings which we supply to prestigious cruise liners and ferry operators worldwide including Carnival Cruise Lines, Holland America Line and Royal Caribbean Cruise Lines. Our marine ranges include woven and tufted wall-to-wall carpets. Wherever they are to be found on board, our marine products meet the most stringent requirements for international markets and marine regulations. All the carpets are tested rigorously in our in-house laboratory as well as by official, external testing institutions. The Desso quality and the extent of our product range means that we are able to offer a complete package for the floor covering of an entire vessel.

AVIATION

In the aviation market we have many years of experience, and have acquired an esteemed reputation for consistent quality, which has helped us earn our position as one of the top three suppliers of wool and nylon aircraft carpeting. Today we supply airlines operating Airbus and Boeing models as well as other commercial aircraft.



SPORTS

Desso Sports Systems has 30 years of experience in the sports surface market, supplying artificial grass and reinforced natural grass systems that provide the perfect playing conditions for sport at all levels. The product portfolio also includes DESSO GrassMaster®, a sports field of 100% natural grass reinforced with Desso synthetic grass fibres. The unique element of this patented reinforced natural grass system is the 20 million artificial grass fibres injected 20 cm deep into the pitch. Today, Desso Sports Systems are one of the world's largest manufacturers with over 50 million square meters of installed sport pitches for football, hockey, tennis, American football, rugby and multi-purpose use.





THE FOUNDATION

To meet the needs of the market, our designers are in close contact with architects, interior designers and suppliers, analysing current thinking and future trends worldwide. We then employ the latest technologies, combined with our wealth of experience, to turn the information we have gathered into innovative new products.

This is reflected in the range of products we offer, which includes functional carpeting for demanding situations, plus exciting tufted and woven carpeting for specifiers and end-users that are looking to make a design statement.

Alongside quality and design we also understand how important it is to provide excellent service. That's why, for every customer and every application, we work hard to ensure that the quality of the service we provide matches the quality of our products.











































21

ABOUT THIS CATALOGUE

This brochure is printed entirely on Cocoon FSC Recycled paper which is made from 100% post-consumer recycled fibres. Cocoon is manufactured using a totally chlorine free process and is certified by standards that promote environmentally appropriate, socially beneficial and economically viable management of the world's forests. For more information on Desso's corporate social responsibility programme please visit www.desso.com



OVERVIEW OF THE SYMBOLS

	Tiles		Classification for use class 21 domestic light use		Cradle to Cradle® Basic certificate
	Broadloom		Classification for use class 22 domestic moderate use		Cradle to Cradle® Silver certificate
	Woven		Classification for use class 22+ domestic general use		GUT – Environmental product label
	Suitable for castor chair continuous use		Classification for use class 23 domestic heavy use		BRE - Environmental award label
	Suitable for castor chair occasional use		Classification for use class 31 commercial moderate use		CRI - Green Label Plus
	Antistatic		Classification for use class 32 commercial general use		GUI - Indoor air quality certification
	Conductivity/ static dissipative (<math><10^9\text{ Ohm}</math>/ <math><10^8\text{ Ohm}</math>)		Classification for use class 33 commercial heavy use		GUI Gold logo
	Suitable for underfloor heating		Monolithic installation		NF-UPEC product certification for France (tiles only)
	Stairs continuous use		Quarter turn installation		Nomination for Good Industrial Design
	Stairs occasional use		Brick installation		2010: good industrial design
	Reaction to fire		Random installation		
	Dimensional stability		Ashlar installation		
	Slip resistance		Certified company for Quality Management System ISO 9001 & Environmental Management System ISO 14001		
	Luxury Classification LC1		CE Mark - Applied Harmonized Standard		
	Luxury Classification LC2				
	Luxury Classification LC3				
	Luxury Classification LC4				
	Luxury Classification LC5				



AirMaster®	24
Arcade	26
Capella	28
City	30
Entry	32
Essence	34
Flavia	36
Flow	38
Flux	40
Forto	42
Freestyle	44
Gravel Line	46
Gravel Motive	48
Gravel Structure	50
Halo	52
Libra Grooves	54
Libra Lines	56
Lita	58
Lupo	60
Manhattan	62
Menda	64
Mila	66
Neo / Neo Core	68
Palatino	70
Pallas	72
Patches	74
Pinto 580	76
Protect	78
Pure	80
Reclaim Ribs	82
Sand	84
Sand Stripe	86
Scape	88
Sienna	90
Stratos	92
Supira	94
Tempra	96
Torso	98
Trapez	100
Tree	102
Twist	104
Verso	106
Verso Bars	108
Verso Grid	110



Alumina	112
Asteranne	114
Arcade	116
Atelier	118
Chanelle	120
Chinchilla	122
City	124
Contessa	126
Elegance	128
Essence	130
Excel	132
Flux	134
Forum	136
Gravel Line	138
Gravel Motive	140
Gravel Structure	142
Hint	144
Inova Twin	146
Marathon	148
Mila	150
Palatino	152
Palesse	154
Pallas	156
Perfect	158
Select	160
Sparx	162
Steel	164
Tempra	166
Torso	168
Trapez	170
Trax	172
Typo	174



Rodin	176
Wilton in Grey	178
Wilton in Ribs	180
Wilton Metallic	182
Wilton Profile	184

Axminster Woven	186
Gravure	188
Symphony á la carte	190
Wilton Woven	192

Carpet Tiles




Broadloom



Woven



Custom Made

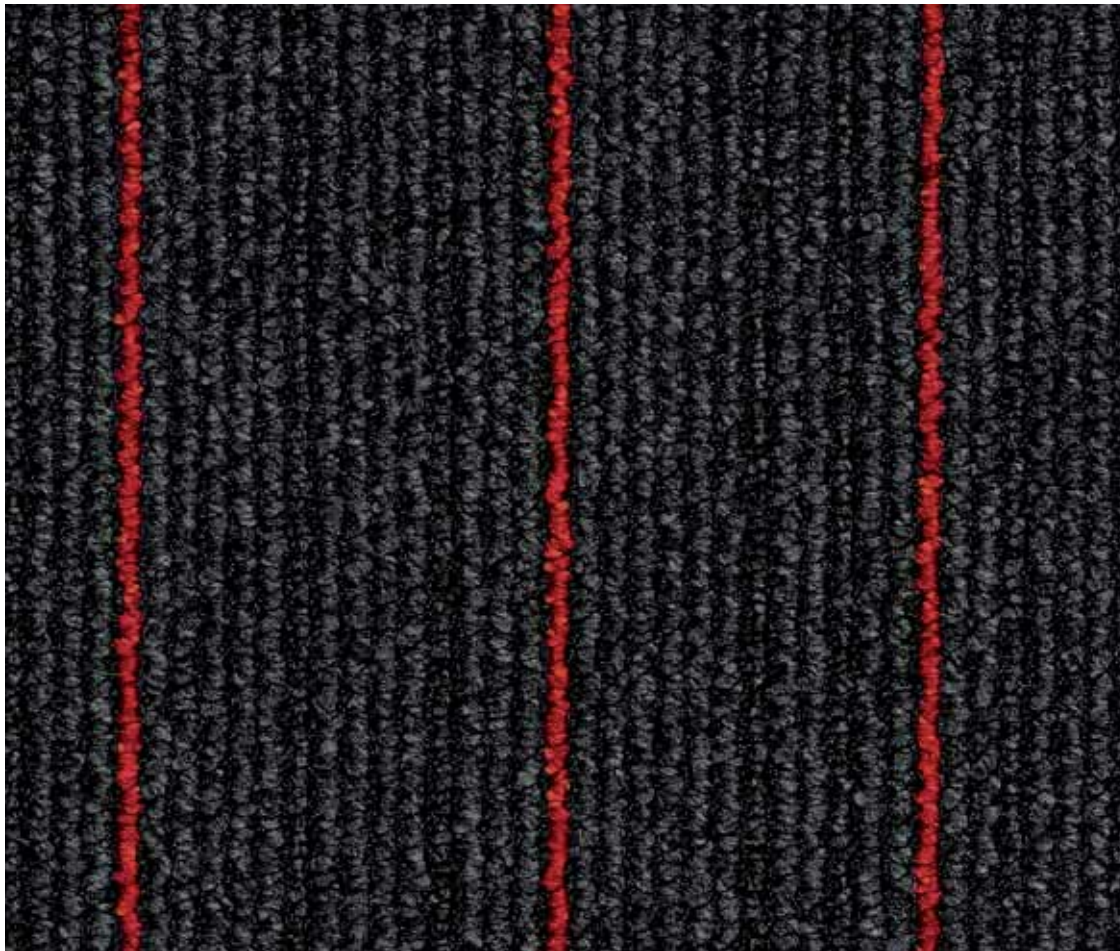

AIRMASTER®

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Structured loop pile
Pile fibre composition	ISO 2424	Solution dyed BCF Polyamide 6 Trilogry Yarn Concept
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	2.4 mm 0.09 inch
Total mass	ISO 8543	4350 g/m ² 128.3 oz/yd ²
Total pile mass	ISO 2424	650 g/m ² 19.1 oz/yd ²
Effective pile mass	ISO 8543	345 g/m ² 10.2 oz/yd ²
Pile density	ISO 8543	0.142 g/cm ³ 0.0051 lb/in ³
Number of tufts	ISO 1763	1850 /dm ² 154679 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Use classification	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B _s - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing




EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk





















2010:
good industrial
design






4307/4208

This innovative structured loop pile carpet tile takes design and functionality to the next level. With its patented technology, DESSO AirMaster® is able to remove fine dust from the air more effectively than any other flooring solution: it is 8 times more effective in capturing and retaining fine dust than hard flooring and 4 times more effective than standard carpet. DESSO AirMaster® comes in 18 atmospheric colours, offering a range of possibilities to make combinations and define specific areas or zones in a room or a building.

											
Colour: 8811 L 20,53 LRV 3,12	Colour: 8501 L 24,31 LRV 4,19	Colour: 8412 L 33,47 LRV 7,76	Colour: 7311 L 33,79 LRV 7,91	Colour: 4406 L 36,61 LRV 9,33	Colour: 4208 L 29,08 LRV 5,87	Colour: 3211 L 24,22 LRV 4,17	Colour: 9084 L 36,59 LRV 9,32	Colour: 9502 L 28,93 LRV 5,81	Colour: 9104 L 26,94 LRV 5,07	Colour: 9091 L 19,16 LRV 2,79	Colour: 3118 L 20,75 LRV 3,18
											
Colour: 9511 L 19,61 LRV 2,89	Colour: 4307 L 20,22 LRV 3,04	Colour: 4407 L 19,56 LRV 2,88	Colour: 7218 L 20,31 LRV 3,07	Colour: 8208 L 20,16 LRV 3,03	Colour: 8508 L 19,97 LRV 2,98						

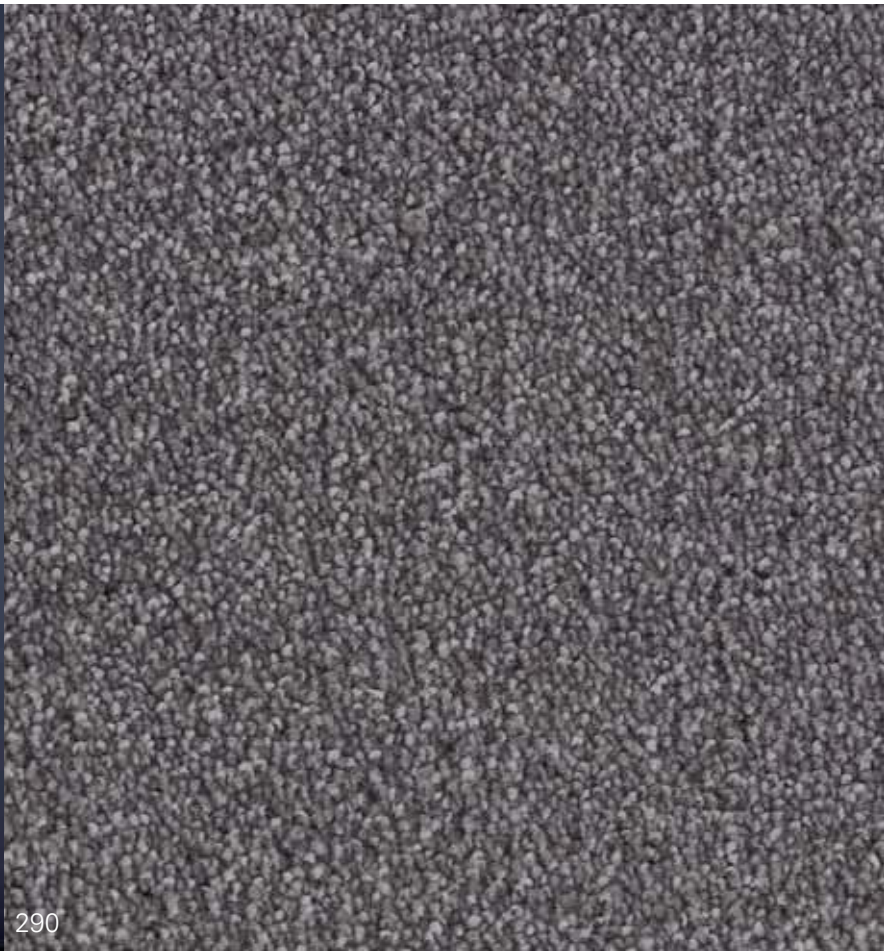

290

ARCADE


Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/7" Cut pile
Pile fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (16 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	10.5 mm 0.41 inch
Effective pile thickness	ISO 1766	6.6 mm 0.26 inch
Total mass	ISO 8543	5600 165.3 oz/yd ²
Total pile mass	ISO 2424	1380 40.7 oz/yd ²
Effective pile mass	ISO 8543	1065 31.4 oz/yd ²
Pile density	ISO 8543	0.162 0.0058 lb/in ³
Number of tufts	ISO 1763	1130 94479 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Use classification	EN 1307	32 Commercial - general use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO BOX 169
NL - 5140AD Waalwijk





Arcade is the perfect example of rich and luxurious carpeting. The high cut pile structure offers comfort, warmth and softness, without compromising on quality and durability. This appearance is enhanced by stylish colours with an elegant mix of tones, ranging from contemporary shades of grey to more classical colours.

											
Colour: 237 L 19,20 LRV 2,80	Colour: 292 L 29,86 LRV 6,21	Colour: 227 L 26,20 LRV 4,81	Colour: 223 L 33,69 LRV 7,89	Colour: 263 L 35,26 LRV 8,66	Colour: 212 L 24,43 LRV 4,24	Colour: 218 L 27,30 LRV 5,24	Colour: 239 L 33,24 LRV 7,66	Colour: 273 L 53,58 LRV 21,60	Colour: 242 L 40,43 LRV 11,53	Colour: 266 L 33,75 LRV 7,89	Colour: 243 L 27,65 LRV 5,35
											
Colour: 291 L 25,87 LRV 4,71	Colour: 255 L 15,40 LRV 1,99	Colour: 290 L 44,08 LRV 13,91									



9970/2118/9112/5422

CAPELLA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	2.5 mm 0.10 inch
Total mass	ISO 8543	4450 g/m ² 131.4 oz/yd ²
Total pile mass	ISO 2424	840 g/m ² 24.8 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.188 g/cm ³ 0.0068 lb/in ³
Number of tufts	ISO 1763	2170 /dm ² 181434 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Use classification	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing




Cradle to Cradle Certified® is a certification mark of MBOC

CE
 EN 14041
 0493-CPD-0002




Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk




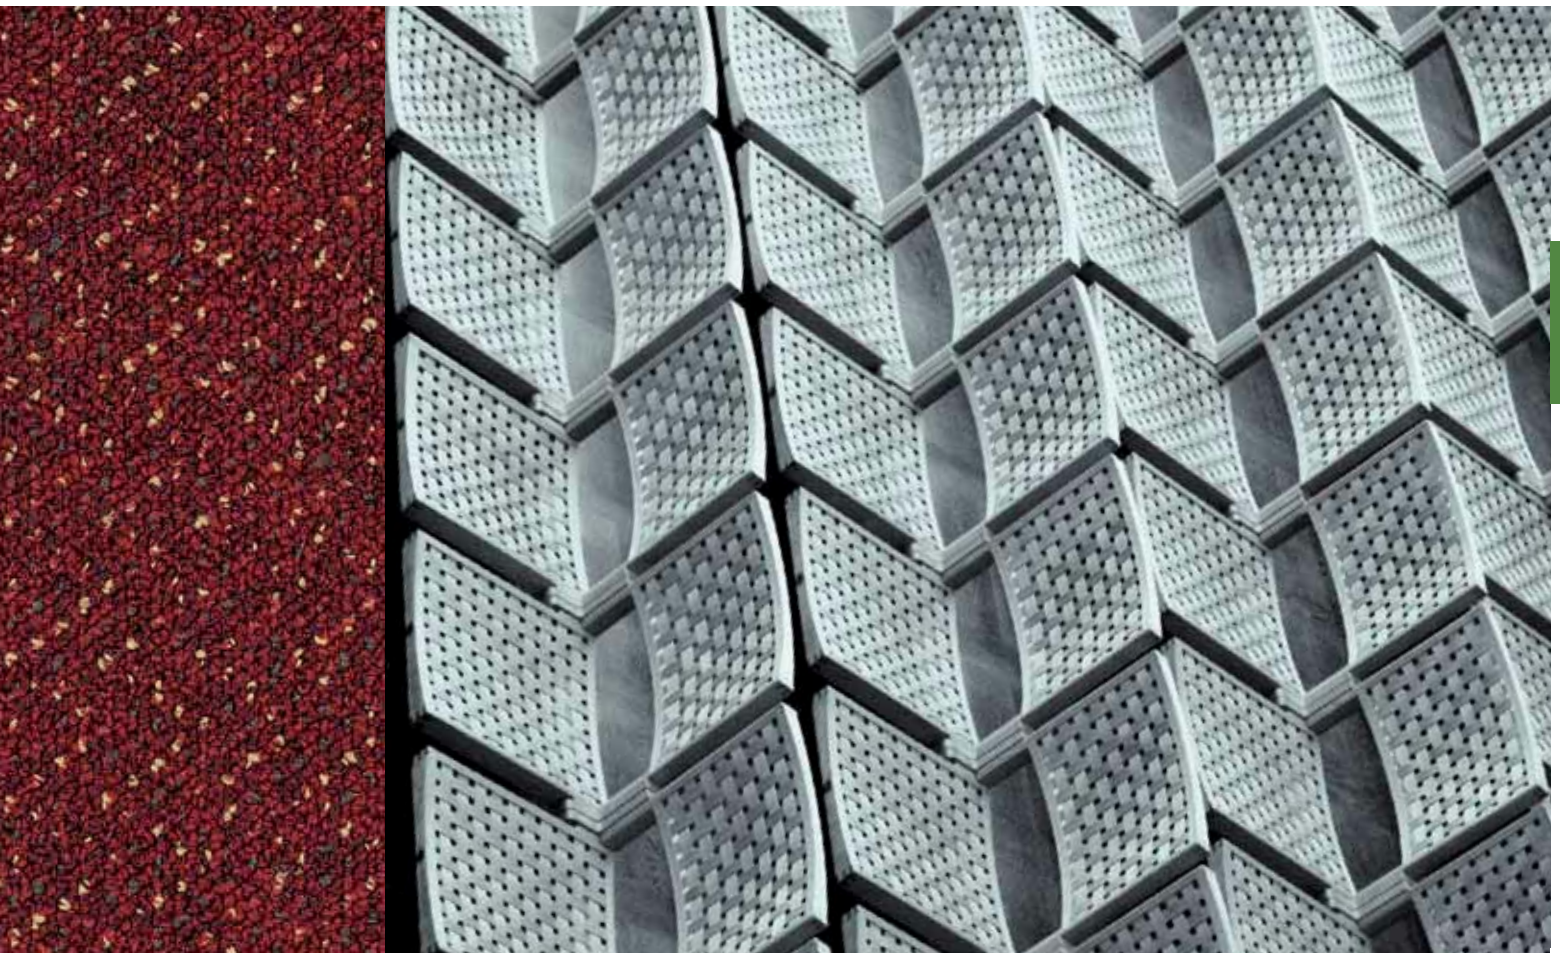



Capella is a hardwearing, low-level loop pile carpet tile available in twelve striking colours. Its strong multi-colour accents provide the perfect compliment to other materials such as fabrics, stone, brick and wood, creating fresh, vibrant interiors.

											
Colour: 8422 L 27,13 LRV 5,14	Colour: 8802 L 28,09 LRV 5,49	Colour: 9985 L 23,08 LRV 3,82	Colour: 8801 L 25,14 LRV 4,46	Colour: 9522 L 33,34 LRV 7,69	Colour: 7811 L 28,69 LRV 5,72	Colour: 7932 L 34,47 LRV 8,23	Colour: 9970 L 42,43 LRV 12,78	Colour: 9112 L 20,79 LRV 3,19	Colour: 2052 L 35,31 LRV 8,65	Colour: 5422 L 51,70 LRV 19,88	Colour: 2118 L 27,27 LRV 5,19

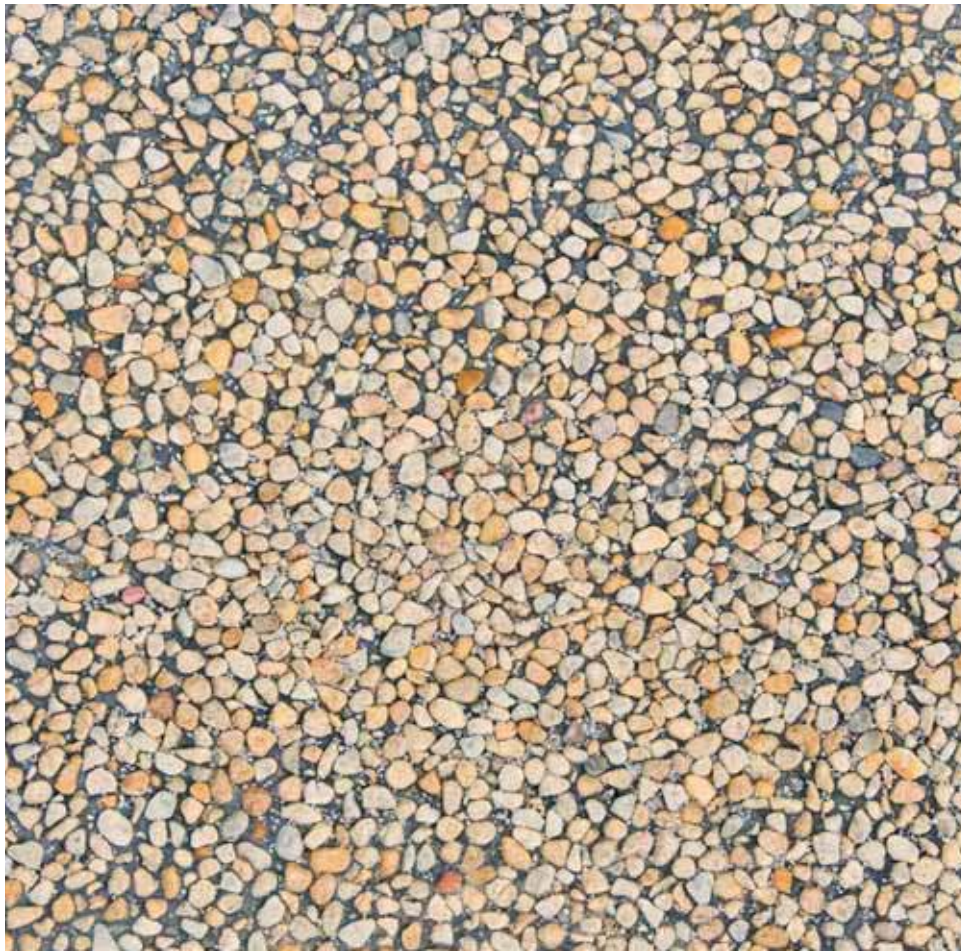

CITY

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - Polyamide fleecce
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.8 mm 0.11 inch
Total mass	ISO 8543	4050 g/m ² 119.5 oz/yd ²
Total pile mass	ISO 2424	520 g/m ² 15.3 oz/yd ²
Effective pile mass	ISO 8543	330 g/m ² 09.7 oz/yd ²
Pile density	ISO 8543	0.117 g/cm ³ 0.0042 lb/in ³
Number of tufts	ISO 1763	1650 /dm ² 137957 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



EN 14041
0493-CPD-0002





9503

Available in both carpet tiles and broadloom, City offers a multitude of creative possibilities and great value for money. Its dense low level loop pile makes it a hardwearing carpet for any commercial application. The colour line of 12 colours ranges from commercial greys and blues to warm natural shades with some brighter accent colours.

											
Colour: 9021 L 18,68 LRV 2,67	Colour: 8811 L 17,61 LRV 2,43	Colour: 8432 L 32,14 LRV 7,15	Colour: 8173 L 36,37 LRV 9,20	Colour: 9514 L 57,03 LRV 24,95	Colour: 9503 L 41,37 LRV 12,10	Colour: 2922 L 46,63 LRV 15,74	Colour: 2034 L 54,05 LRV 22,02	Colour: 2116 L 31,43 LRV 6,83	Colour: 4211 L 23,86 LRV 4,06	Colour: 9532 L 31,65 LRV 6,93	Colour: 9001 L 18,34 LRV 2,59



9975

ENTRY

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" cut pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (12 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen
Total thickness	ISO 1765	8.5 mm 0.33 inch
Effective pile thickness	ISO 1766	5.0 mm 0.20 inch
Total mass	ISO 8543	4900 g/m ² 144.6 oz/yd ²
Total pile mass	ISO 2424	1470 g/m ² 43.4 oz/yd ²
Effective pile mass	ISO 8543	650 g/m ² 19.2 oz/yd ²
Pile density	ISO 8543	0.130 g/cm ³ 0.0047 lb/in ³
Number of tufts	ISO 1763	655 /dm ² 54765 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk








Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001



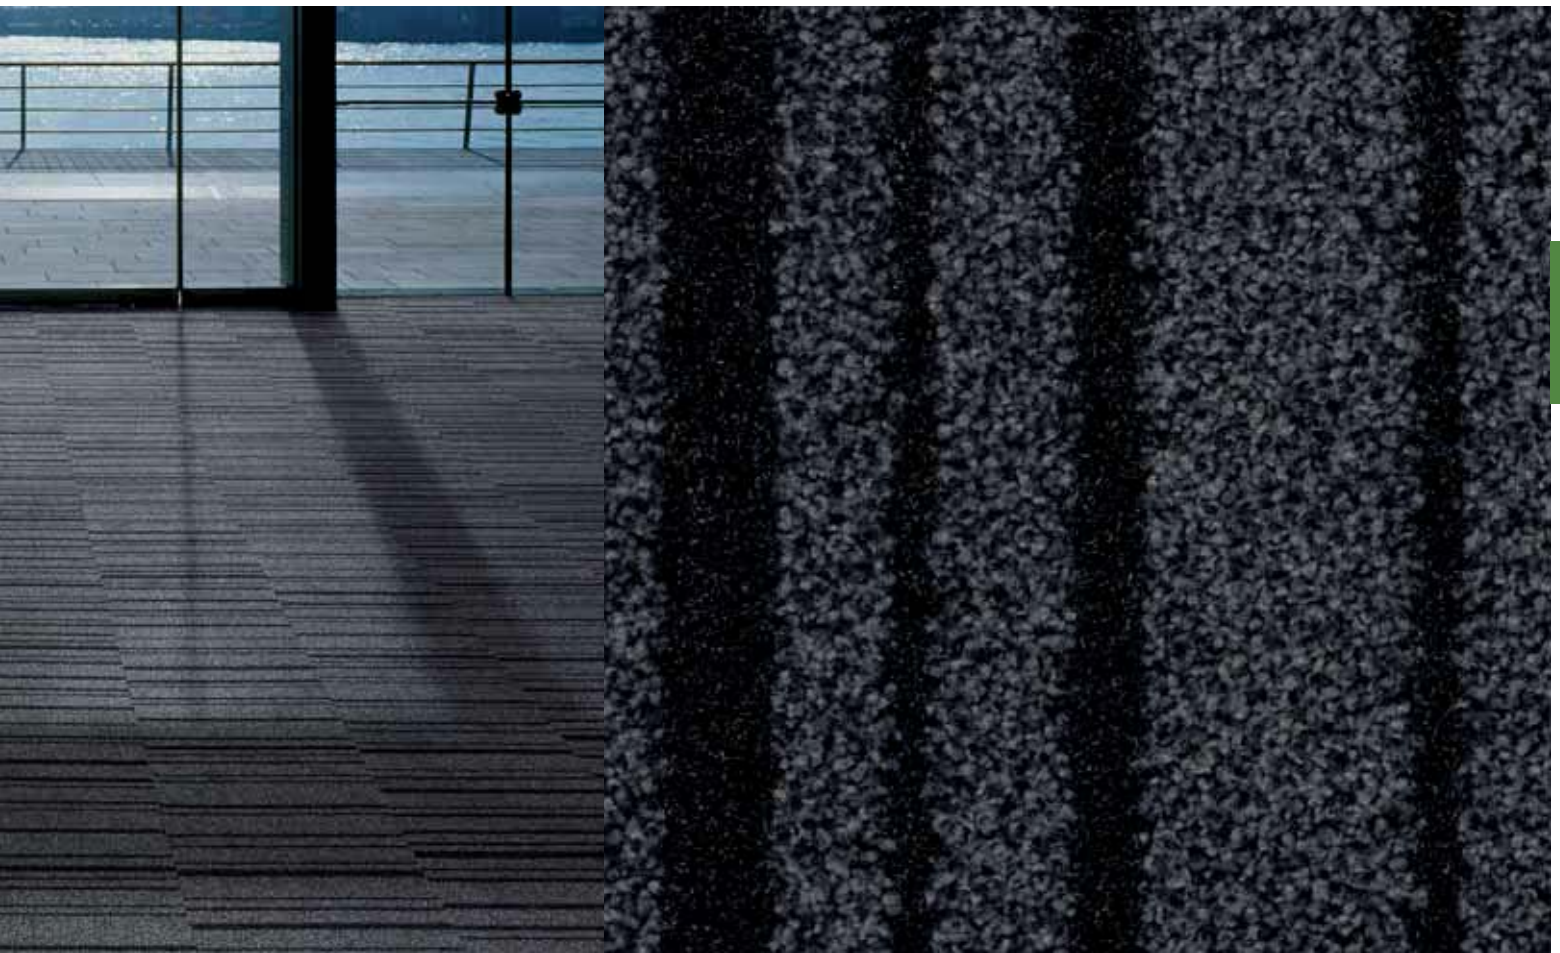

Entry is the next level in Desso entrance barrier matting, combining functionality and design. The random black lines of scraper fiber give the product a playful effect, allowing you to create a distinctive floor design in a wide range of applications (e.g. receptions, elevator areas) while safeguarding the smart interiors in the rest of the building from external dirt and moisture.



Colour: 8901
L 19,90
LRV 2,28



Colour: 9091
L 25,01
LRV 4,42



Colour: 2912
L 27,87
LRV 5,41



Colour: 9975
L 23,19
LRV 3,86



9021

ESSENCE

Specification according to EN 1307


Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - Polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver®
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.2 mm 0.09 inch
Total mass	ISO 8543	4000 g/m ² 118.1 oz/yd ²
Total pile mass	ISO 2424	500 g/m ² 14.8 oz/yd ²
Effective pile mass	ISO 8543	300 g/m ² 08.9 oz/yd ²
Pile density	ISO 8543	0.132 g/cm ³ 0.0048 lb/in ³
Number of tufts	ISO 1763	1580 /dm ² 132104 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002





This carpet product stands for quality at an affordable price. With its level loop pile structure, a colour range of strong, commercial colours and good, hardwearing quality, this product embodies the pure essence of a flooring product. Essence is available in both carpet tiles and broadloom (in 12 and 6 colours respectively) for endless freedom in flooring design.

											
Colour: 3841 L 22,57 LRV 3,68	Colour: 8521 L 24,75 LRV 4,34	Colour: 8812 L 37,10 LRV 9,59	Colour: 7283 L 36,24 LRV 9,13	Colour: 2108 L 26,11 LRV 4,78	Colour: 2047 L 35,97 LRV 8,99	Colour: 9094 L 38,22 LRV 10,21	Colour: 9093 L 35,99 LRV 9,00	Colour: 2921 L 25,72 LRV 4,65	Colour: 9501 L 24,04 LRV 4,11	Colour: 9503 L 40,00 LRV 11,25	Colour: 9945 L 47,80 LRV 16,64



4217/2118/9515

FLAVIA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.8 mm 0.15 inch
Total mass	ISO 8543	4350 g/m ² 128.4 oz/yd ²
Total pile mass	ISO 2424	1000 g/m ² 29.5 oz/yd ²
Effective pile mass	ISO 8543	670 g/m ² 19.8 oz/yd ²
Pile density	ISO 8543	0.175 g/cm ³ 0.0063 lb/in ³
Number of tufts	ISO 1763	1580 /dm ² 132104 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of MBOC




EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



* Bitumen only

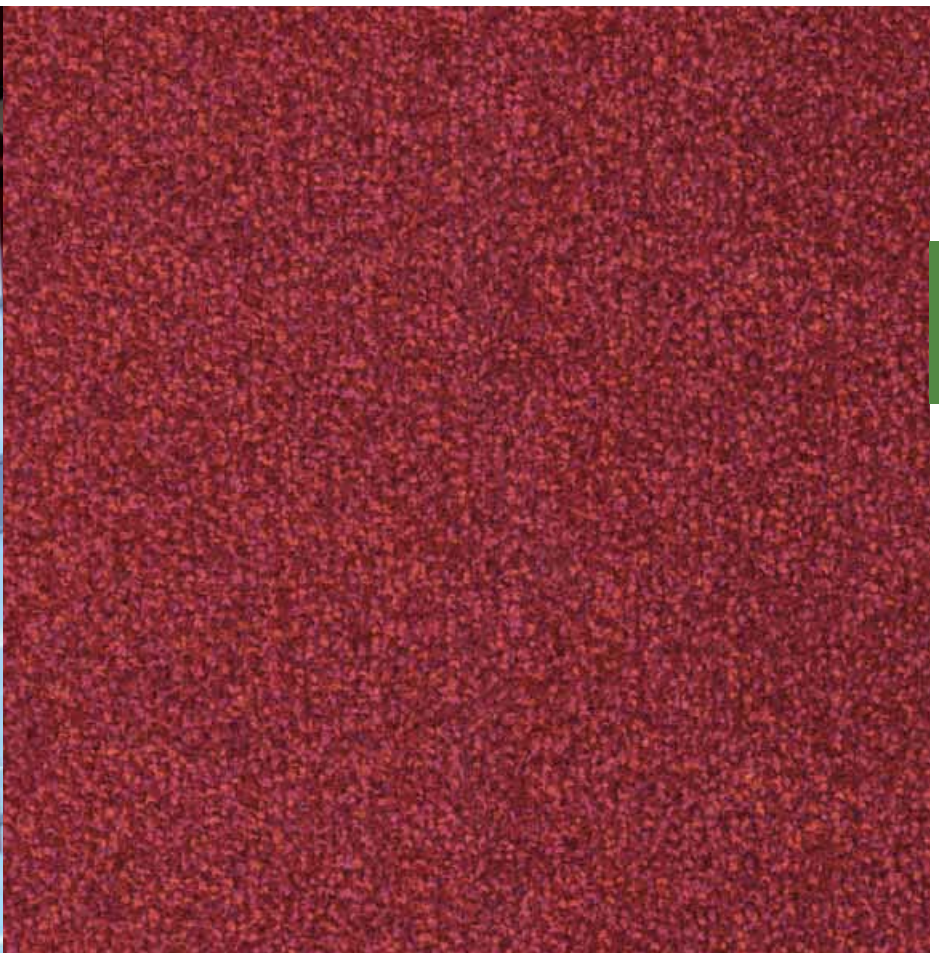

Flavia cut pile carpet tiles create that special ambience of classic yet modern, timeless yet chic. Its luxurious feel and appearance give just that bit of extra richness to any commercial environment. Flavia is available in an extensive palette of 36 fresh colours, with a subtle multi-colour effect for extra depth and liveliness.

											
Colour: 9502 L 23,94 LRV 4,08	Colour: 8521 L 24,07 LRV 4,12	Colour: 8502 L 29,53 LRV 6,05	Colour: 8223 L 37,06 LRV 9,57	Colour: 8801 L 30,67 LRV 6,51	Colour: 3021 L 34,62 LRV 8,31	Colour: 3012 L 29,50 LRV 6,03	Colour: 8173 L 37,82 LRV 9,99	Colour: 8842 L 33,15 LRV 7,61	Colour: 8931 L 26,20 LRV 4,82	Colour: 7811 L 26,21 LRV 4,82	Colour: 7842 L 37,13 LRV 9,61
											
Colour: 7824 L 46,90 LRV 15,94	Colour: 7573 L 52,14 LRV 20,27	Colour: 9035 L 42,14 LRV 12,59	Colour: 9515 L 48,72 LRV 17,36	Colour: 7905 L 49,05 LRV 17,63	Colour: 6012 L 57,86 LRV 25,81	Colour: 5318 L 44,93 LRV 14,49	Colour: 4334 L 45,19 LRV 14,68	Colour: 5012 L 36,06 LRV 9,04	Colour: 4323 L 35,20 LRV 8,60	Colour: 4217 L 28,32 LRV 5,58	Colour: 2118 L 21,38 LRV 3,35
											
Colour: 2128 L 26,56 LRV 4,94	Colour: 2096 L 32,56 LRV 7,34	Colour: 9501 L 17,69 LRV 2,45	Colour: 3921 L 21,90 LRV 3,49	Colour: 2061 L 32,11 LRV 7,13	Colour: 2035 L 38,45 LRV 10,34	Colour: 9105 L 48,31 LRV 17,04	Colour: 4233 L 40,87 LRV 11,78	Colour: 2104 L 47,80 LRV 16,64	Colour: 4034 L 47,42 LRV 16,34	Colour: 3842 L 34,60 LRV 8,30	Colour: 2931 L 27,47 LRV 5,26



3811

FLOW

Specification according to EN 1307

Type of manufacture	SO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.5 mm 0.14 inch
Total mass	ISO 8543	4400 g/m ² 129.8 oz/yd ²
Total pile mass	ISO 2424	860 g/m ² 25.4 oz/yd ²
Effective pile mass	ISO 8543	610 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.159 g/cm ³ 0.0057 lb/in ³
Number of tufts	ISO 1763	1575 /dm ² 131250 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of MBOC



Manufactured by:


Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001



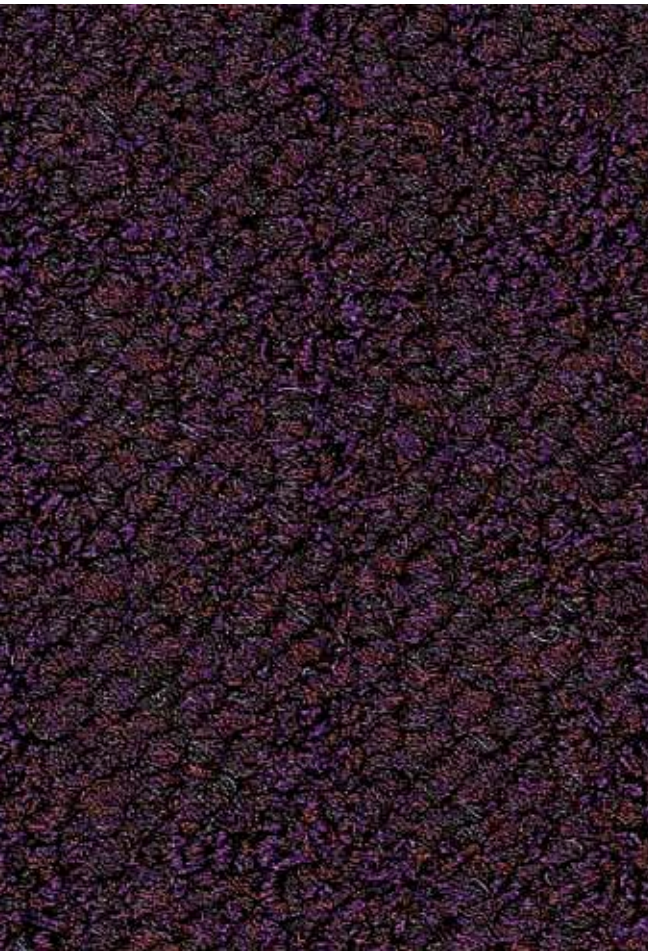

Organic patterns of dried earth and cracked porcelain are embodied in the rich high-low structure of Flow. Its endless, naturally flowing lines, in contrasting matt and shiny yarns, give this product an engaging 3D appearance to create distinctive flooring designs in any commercial application. Contemporary greys, warm neutrals and bolder accent colours make up the colour line and can be endlessly combined with other colours or interior elements. This carpet tile is delivered as standard with DESSO EcoBase® backing and Silver Cradle to Cradle® certification.

											
Colour: 9021 L 15,66 LRV 2,04	Colour: 3841 L 16,63 LRV 2,23	Colour: 8172 L 27,60 LRV 5,31	Colour: 7173 L 44,46 LRV 14,17	Colour: 2046 L 39,74 LRV 11,10	Colour: 5202 L 38,61 LRV 10,43	Colour: 4301 L 28,42 LRV 5,62	Colour: 3923 L 34,39 LRV 8,20	Colour: 3811 L 16,72 LRV 2,24	Colour: 9013 L 29,69 LRV 6,19	Colour: 9096 L 49,86 LRV 18,31	Colour: 9105 L 37,39 LRV 9,75
											
Colour: 9027 L 57,80 LRV 25,76	Colour: 3923 L 34,39 LRV 8,20	Colour: 9503 L 30,38 LRV 6,39	Colour: 9111 L 18,69 LRV 2,71								



4411

FLUX

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - Polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	4300 g/m ² 126.9 oz/yd ²
Total pile mass	ISO 2424	760 g/m ² 22.4 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 15.1 oz/yd ²
Pile density	ISO 8543	0.180 g/cm ³ 0.0065 lb/in ³
Number of tufts	ISO 1763	2100 /dm ² 175581 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of MBOC

CE
EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



* Bitumen only



Flux has a clean and elegant appearance. The unity of both a matt and a shiny yarn enhances the textile character of the carpet, to create strong links with other fabrics used in interior elements. The combination of yarns in a linear pattern also adds a lively character and depth to the product, intensified by the influence of light in the design.

											
Colour: 8811 L 15,71 LRV 2,04	Colour: 8521 L 25,77 LRV 4,67	Colour: 2025 L 45,51 LRV 14,91	Colour: 7117# L 48,44 LRV 17,14	Colour: 6303# L 59,67 LRV 27,76	Colour: 4411 L 33,06 LRV 7,56	Colour: 4311 L 23,80 LRV 4,04	Colour: 3411 L 16,45 LRV 2,19	Colour: 2914 L 42,89 LRV 13,08	Colour: 9104 L 35,43 LRV 8,72	Colour: 2922 L 28,16 LRV 5,52	Colour: 2941 L 22,00 LRV 3,52
											
Colour: 9975 L 23,85 LRV 4,05	Colour: 2121 L 18,77 LRV 2,69	Colour: 9512 L 20,51 LRV 3,12	Colour: 9965 L 33,38 LRV 7,71	Colour: 9504 L 33,99 LRV 8,00	Colour: 9095 L 42,81 LRV 13,03	# Only suitable for Checkerboard installation (Tiles)					



2098

FORTO

Specification according to EN 1470

Type of manufacture	ISO 2424	Needled Flat needle felt
Pile Fibre composition	ISO 2424	Fibre dyed 70% Polyamide - 30% Polyester
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	7.0 mm 0.28 inch
Effective pile thickness	ISO 1766	2.2 mm 0.09 inch
Total mass	ISO 8543	4650 g/m ² 137.2 oz/yd ²
Total pile mass	ISO 2424	525 g/m ² 15.5 oz/yd ²
Effective pile mass	ISO 8543	405 g/m ² 12.0 oz/yd ²
Pile density	ISO 8543	0.185 g/cm ³ 0.0067 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1470	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0066



















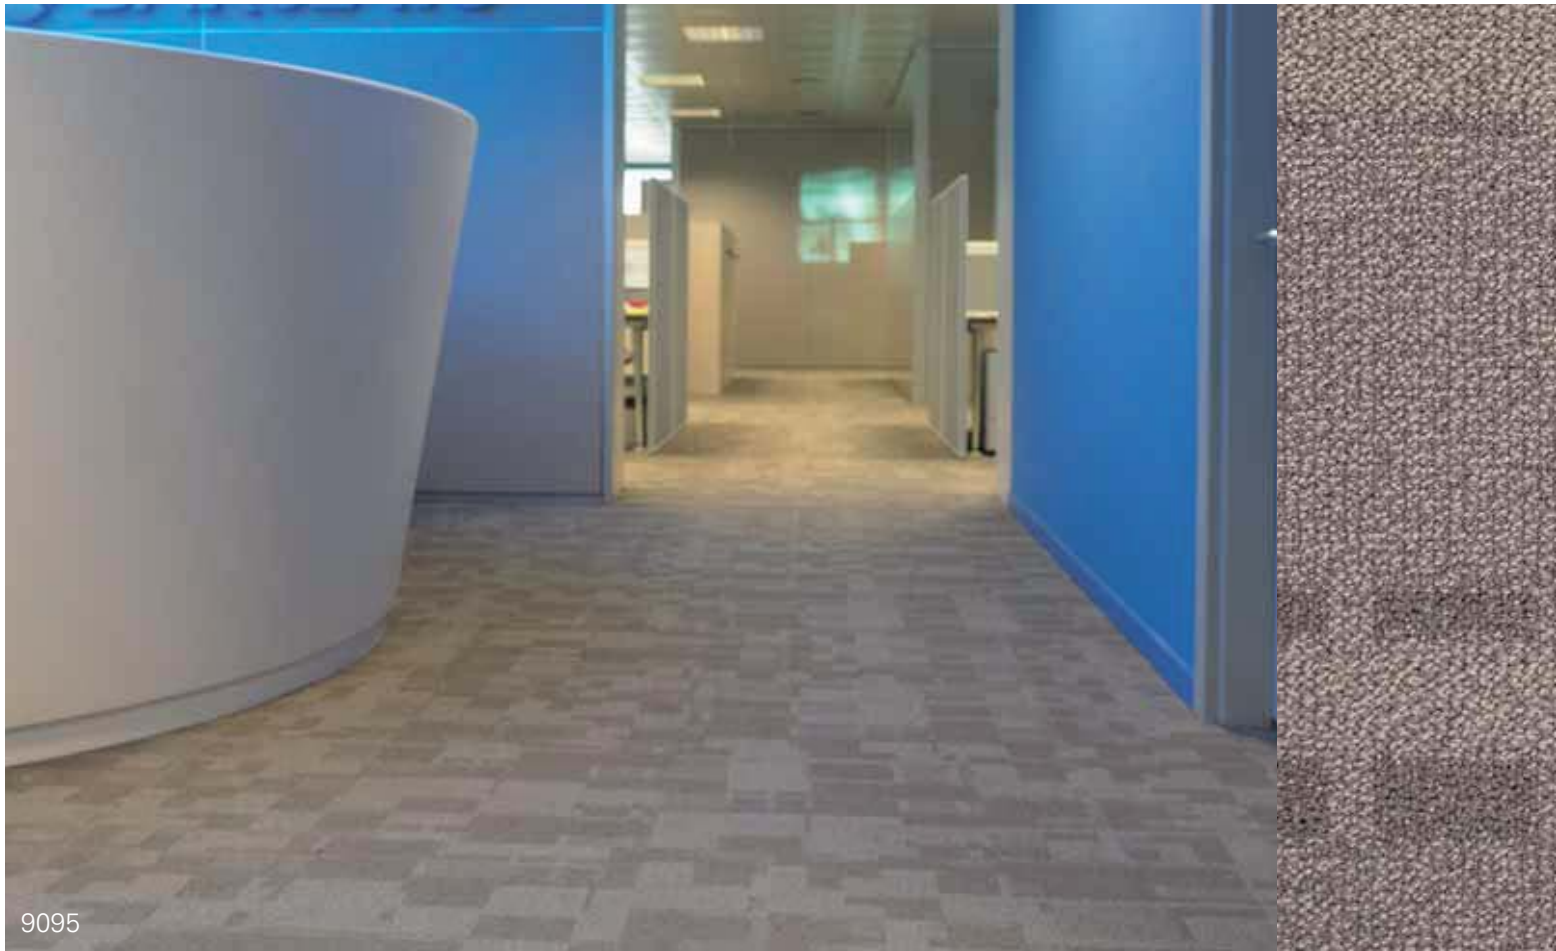
Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





If you are looking for a robust carpet tile, Forto is the best choice. This hardwearing fiberbonded carpet tile is manufactured from 100% nylon fibres perfected through Desso's expertise and specialist knowledge. Forto is available in 16 commercial colours.

											
Colour: 8801 L 22,65 LRV 3,70	Colour: 8812 L 33,31 LRV 7,68	Colour: 8913 L 40,59 LRV 11,61	Colour: 8902 L 34,47 LRV 8,24	Colour: 7801 L 26,43 LRV 4,89	Colour: 8852 L 33,21 LRV 7,63	Colour: 2913 L 37,74 LRV 9,94	Colour: 2914 L 37,74 LRV 9,94	Colour: 2033 L 37,82 LRV 9,99	Colour: 2063 L 39,61 LRV 11,02	Colour: 2932 L 30,24 LRV 6,33	Colour: 2098 L 27,14 LRV 5,14
											
Colour: 2108 L 20,96 LRV 3,23	Colour: 9501 L 19,73 LRV 2,92	Colour: 9985 L 23,77 LRV 4,03	Colour: 9503 L 33,83 LRV 7,93								



9095

FREESTYLE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.5 mm 0.14 inch
Total mass	ISO 8543	4550 g/m ² 134.3 oz/yd ²
Total pile mass	ISO 2424	850 g/m ² 25.1 oz/yd ²
Effective pile mass	ISO 8543	550 g/m ² 16.2 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	2130 /dm ² 178089 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour


 Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk
 EN 14041
 0493-CPD-0002




















* Bitumen only



Freestyle is a modern loop pile carpet tile that can be installed in a random format, allowing for faster installation, minimum waste and maximum flexibility. Available in ten sophisticated colours, Freestyle has a contemporary geometric pattern ideally suited to corporate environments.

Colour: 3021 L 21,28 LRV 3,32	Colour: 8431 L 24,96 LRV 4,40	Colour: 2118 L 22,56 LRV 3,67	Colour: 2913 L 35,36 LRV 8,68	Colour: 9095 L 47,34 LRV 16,28	Colour: 9091 L 19,10 LRV 2,77	Colour: 9012 L 21,94 LRV 3,50	Colour: 9501 L 24,10 LRV 4,13	Colour: 9021 L 24,03 LRV 4,11	Colour: 9023 L 38,86 LRV 10,58



2941

GRAVEL LINE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 / 19.68" x 19.68" (16 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.2 mm 0.13 inch
Total mass	ISO 8543	4400 g/m ² 129.9 oz/yd ²
Total pile mass	ISO 2424	875 g/m ² 25.8 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 15.1 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 0.0058 lb/in ³
Number of tufts	ISO 1763	1865 /dm ² 155933 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk


EN 14041
0493-CPD-0002



Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001

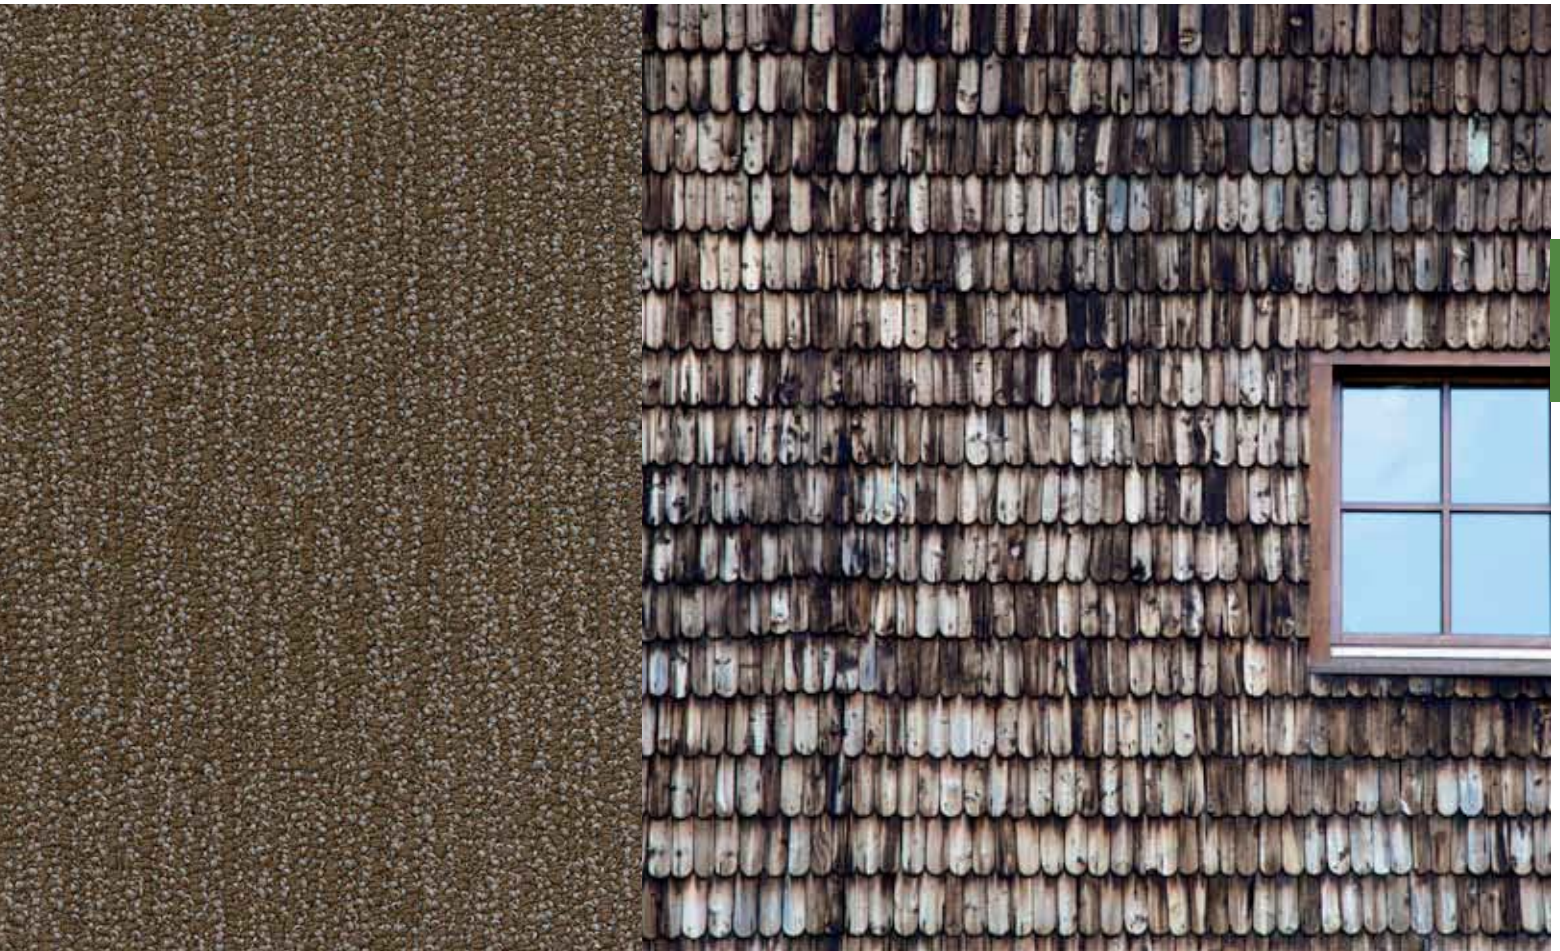

Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. Gravel Line features an organically ribbed structure combined with hints of geometry. This irregular structure works synergistically with the naturally inspired colour line of beige, brown and mineral tones. The subtle multi-colour effect further enhances the tactile appearance of this carpet. Some of the 8 colours can be combined with the other designs, Gravel Motive and Gravel Structure, for creative flooring designs.

							
Colour: 9990 L 17,83 LRV 2,48	Colour: 8901 L 18,27 LRV 2,58	Colour: 8331 L 28,86 LRV 5,79	Colour: 9975 L 39,59 LRV 11,00	Colour: 4218 L 29,16 LRV 5,90	Colour: 2941 L 26,00 LRV 4,75	Colour: 2042 L 40,03 LRV 11,27	Colour: 2043 L 45,95 LRV 15,23



2121

GRAVEL MOTIVE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 / 19.68" x 19.68" (16 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.2 mm 0.13 inch
Total mass	ISO 8543	4400 g/m ² 129.9 oz/yd ²
Total pile mass	ISO 2424	875 g/m ² 25.8 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 15.1 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 0.0058 lb/in ³
Number of tufts	ISO 1763	1865 /dm ² 155933 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

CE
EN 14041
0493-CPD-0002

Manufactured by:
Desso BV
PO Box 169
NL - 5140 AD Waalwijk







Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. With its graphical pattern of randomly placed blocks of different shapes and sizes, Gravel Motive is ideal for commercial environments. The dynamic nature of the design is further enhanced by the palette of 6 corporate colours with a subtle multi-colour effect, easily combined with the other Gravel designs.



Colour: 9990
L 16,73
LRV 2,25



Colour: 8901
L 20,19
LRV 3,04



Colour: 9975
L 41,41
LRV 8,20




Colour: 2924
L 45,93
LRV 15,22



Colour: 2078
L 34,39
LRV 8,20



Colour: 2121
L 20,46
LRV 3,10

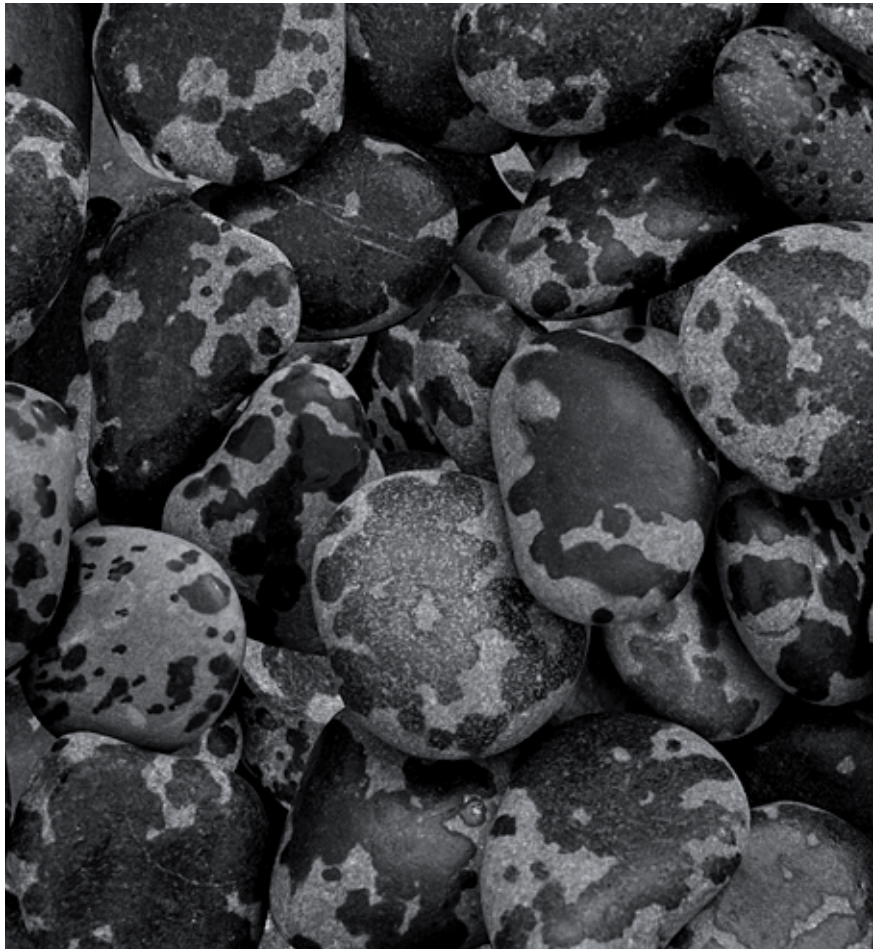

GRAVEL STRUCTURE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 / 19.68" x 19.68" (16 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.2 mm 0.13 inch
Total mass	ISO 8543	4400 g/m ² 129.9 oz/yd ²
Total pile mass	ISO 2424	875 g/m ² 25.8 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 15.1 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 0.0058 lb/in ³
Number of tufts	ISO 1763	1865 /dm ² 155933 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Dimensional stability	EN 986	<0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001






8901

Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. The organic pattern of irregular highs and lows embodies the natural effect of calm water flows. The neutral colour range reflects nature even more through cool greys and blues and warm beiges and reds. Most colours can be combined with the designs of Gravel Line or Gravel Motive to create distinctive, unique interiors.

					
Colour: 9990 L 18,58 LRV 2,65	Colour: 8901 L 20,40 LRV 3,09	Colour: 9975 L 39,31 LRV 10,85	Colour: 2042 L 38,24 LRV 10,23	Colour: 2078 L 34,39 LRV 8,20	Colour: 4201 L 25,42 LRV 4,55

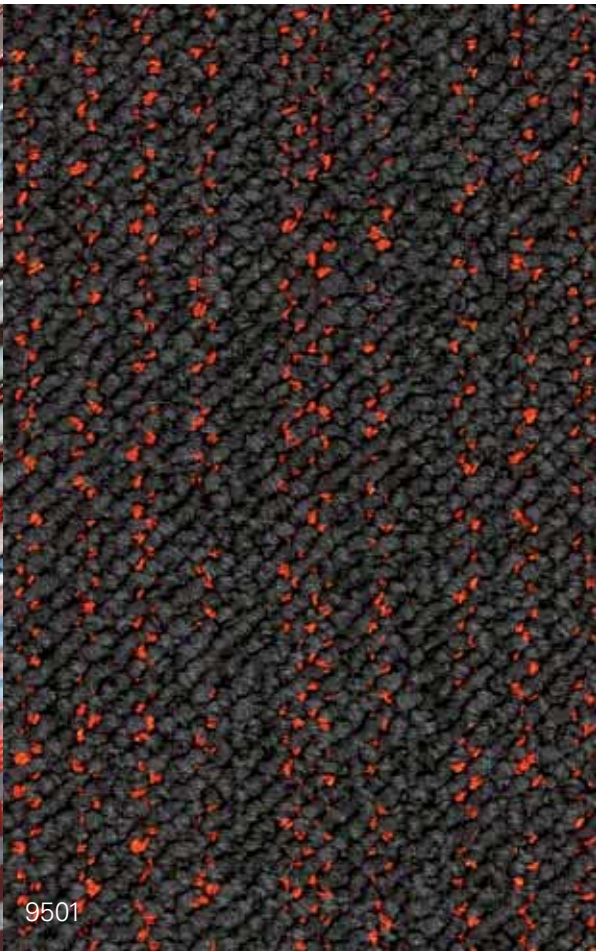

9501

HALO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.8 mm 0.14 inch
Total mass	ISO 8543	4600 g/m ² 135.7 oz/yd ²
Total pile mass	ISO 2424	915 g/m ² 27.0 oz/yd ²
Effective pile mass	ISO 8543	700 g/m ² 20.8 oz/yd ²
Pile density	ISO 8543	0.186 g/cm ³ 0.0067 lb/in ³
Number of tufts	ISO 1763	1575 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



BASIC

Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



SILVER

Cradle to Cradle Certified® is a certification mark of NBOC



Manufactured by:


Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001



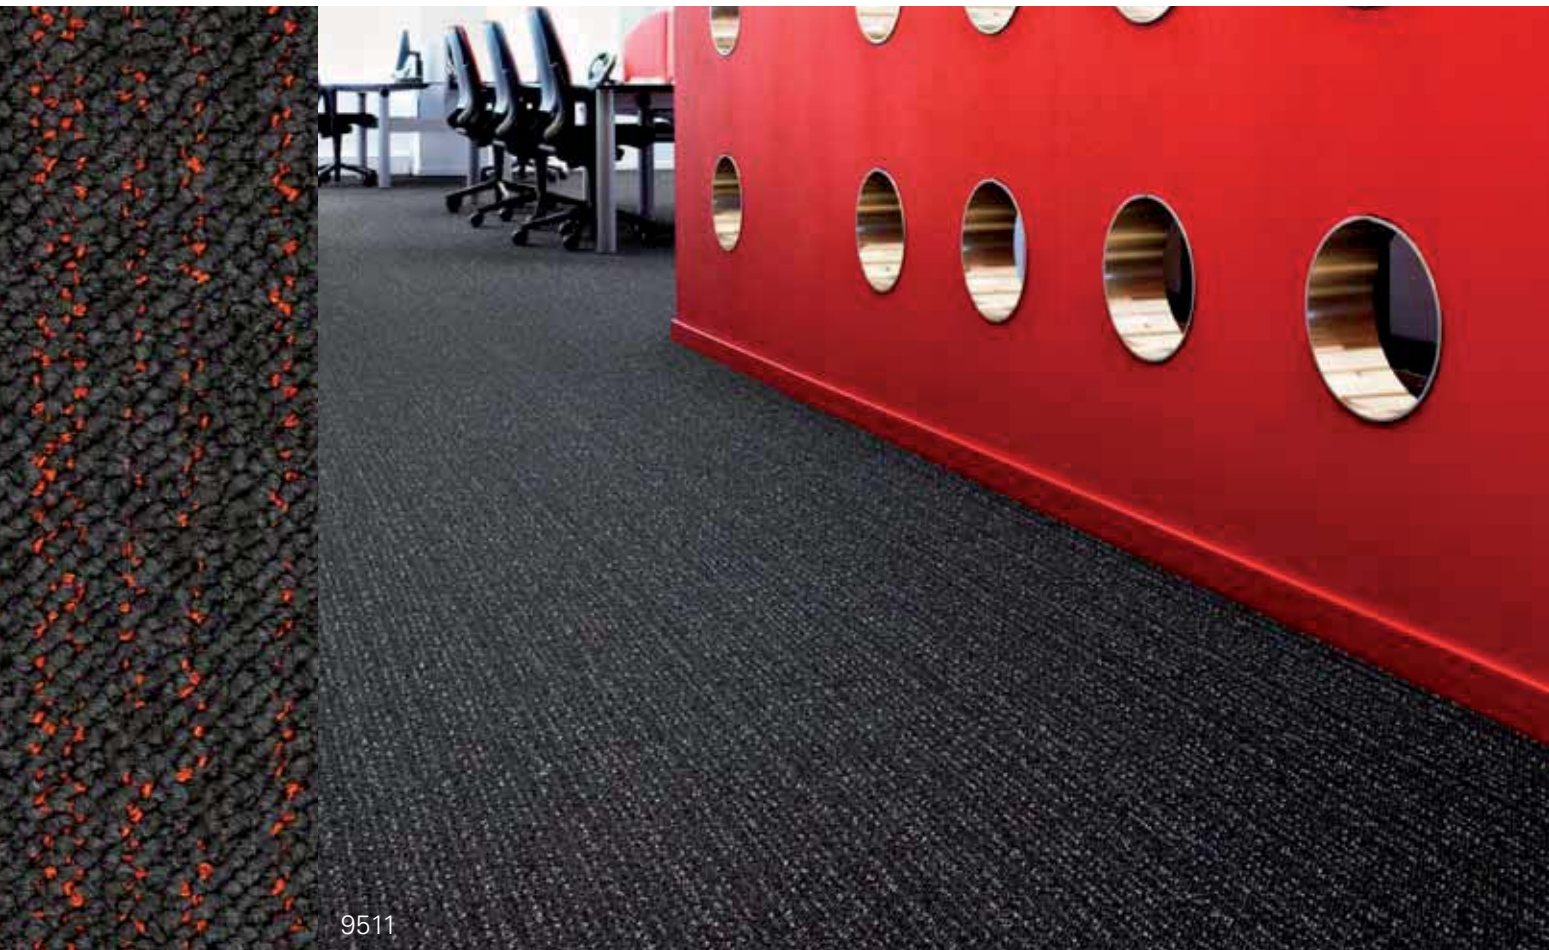

9511

Playful use of bold colours creates the unique character of Halo, used as accent in the deeper layer of this carpet tile product. The high-low construction of lustrous accents against a matt base creates a layered effect, as the accent colour becomes visible in immediate surroundings and fades away into the distance. Other Desso products, such as Palatino and other interior elements are available for creative floor plans that set the tone, define an area or give direction in a building.



Colour: 9511
L 26,79
LRV 5,02



Colour: 9021
L 19,79
LRV 2,94




Colour: 9501
L 18,82
LRV 2,71




Colour: 9531
L 24,69
LRV 4,31



Colour: 9001
L 19,88
LRV 2,96




Colour: 9091
L 26,52
LRV 4,92




Colour: 2924
L 43,36
LRV 13,40



Colour: 9514
L 45,58
LRV 14,96



Colour: 9001
L 19,88
LRV 2,96

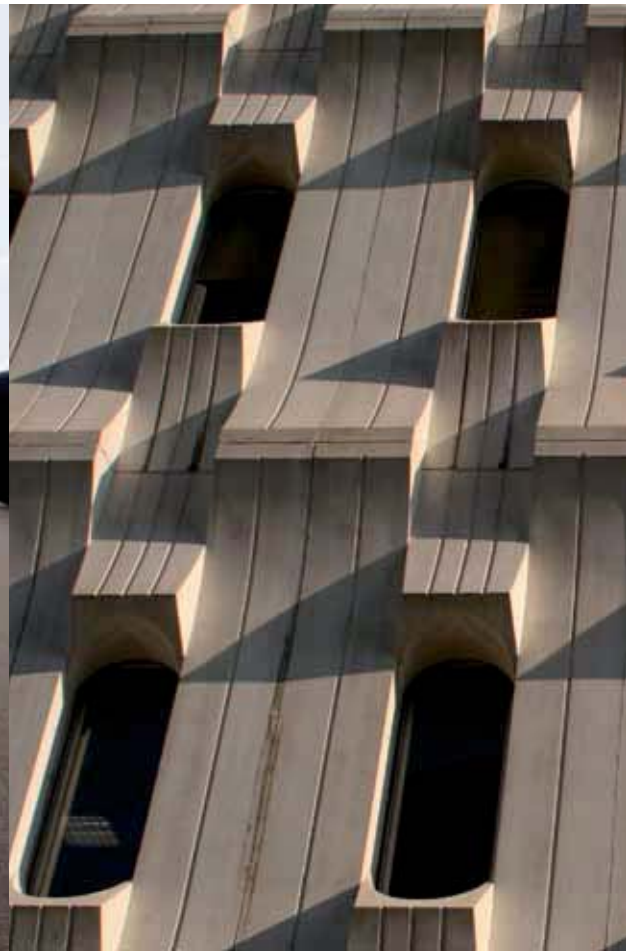

2924

LIBRA GROOVES

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	4350 g/m ² 128.4 oz/yd ²
Total pile mass	ISO 2424	750 g/m ² 22.1 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



BASIC

Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



SILVER

Cradle to Cradle Certified® is a certification mark of NBOC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



* Bitumen only



This tufted loop pile carpet tile product, with a structured linear style, brings together a spectrum of 12 natural and bright colours to create dynamic environments. The multi-coloured yarns are placed between higher piles of single-coloured yarns for a more subtle effect. With Libra, you can create floors which are trendy but tough; the perfect synergy of the smart and the sensible.

Colour: 8801 L 30,00 LRV 6,23	Colour: 2045 L 49,83 LRV 18,28	Colour: 2924 L 49,12 LRV 17,69	Colour: 2062 L 43,25 LRV 13,32	Colour: 2117 L 34,94 LRV 8,47	Colour: 2094 L 36,55 LRV 9,30	Colour: 2942 L 31,87 LRV 7,03	Colour: 9001 L 23,53 LRV 3,96	Colour: 9501 L 28,84 LRV 5,78	Colour: 9022 L 26,07 LRV 4,77	Colour: 9975 L 32,43 LRV 7,28	Colour: 9950 L 47,43 LRV 16,35



2924

LIBRA LINES

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.5 mm 0.10 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	625 g/m ² 18.4 oz/yd ²
Effective pile mass	ISO 8543	400 g/m ² 11.8 oz/yd ²
Pile density	ISO 8543	0.160 g/cm ³ 0.0058 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of INBC

With EcoBase® backing




Cradle to Cradle Certified® is a certification mark of INBC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



* Bitumen only



This tufted loop pile carpet tile product, with a structured linear style, brings together a spectrum of 24 natural and bright colours to create dynamic environments. A playful effect of fading colours is created by the multi-coloured yarns at the surface of this carpet tile. With Libra, you can create floors which are trendy but tough; the perfect synergy of the smart and the sensible.

Colour: 3922 L 34,65 LRV 8,33	Colour: 8431 L 36,78 LRV 9,42	Colour: 8801 L 28,69 LRV 5,72	Colour: 8812 L 45,00 LRV 14,54	Colour: 8841 L 31,12 LRV 6,70	Colour: 7912 L 33,95 LRV 7,98	Colour: 7812 L 47,31 LRV 16,26	Colour: 7952 L 41,73 LRV 12,33	Colour: 9950 L 47,03 LRV 16,04	Colour: 2924 L 48,23 LRV 16,97	Colour: 2062 L 49,06 LRV 17,64	Colour: 2045 L 49,35 LRV 17,88
Colour: 2035 L 50,99 LRV 19,26	Colour: 2117 L 36,07 LRV 9,04	Colour: 2094 L 36,62 LRV 9,33	Colour: 9022 L 30,93 LRV 6,62	Colour: 9021 L 27,85 LRV 5,40	Colour: 9501 L 30,13 LRV 6,29	Colour: 9001 L 31,40 LRV 6,82	Colour: 9072 L 36,89 LRV 9,48	Colour: 9975 L 33,43 LRV 7,74	Colour: 2942 L 34,66 LRV 8,33	Colour: 9104 L 37,27 LRV 9,69	Colour: 2082 L 34,79 LRV 8,39



7118

LITA

Specification according to EN 13297

Type of manufacture	ISO 2424	Needed Pile needle felt	
Pile Fibre composition	ISO 2424	Fibre dyed BCF Polyamide 6	
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)	
Primary backing	ISO 2424	Polyester - polyamide fleece	
Secondary backing	ISO 2424	Modified bitumen Polyver®	
Total thickness	ISO 1765	9.0 mm	0.35 inch
Effective pile thickness	ISO 1766	4.0 mm	0.16 inch
Total mass	ISO 8543	5000 g/m ²	147.6 oz/yd ²
Total pile mass	ISO 2424	1340 g/m ²	39.5 oz/yd ²
Effective pile mass	ISO 8543	500 g/m ²	14.8 oz/yd ²
Pile density	ISO 8543	0.125 g/cm ³	0.0045 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV	
Classification for use	EN 13297	33 Commercial - heavy use	
Flammability	EN 13501-1	B _f - s1	
Light Reflectance Value (LRV)	BS 8493	See right page per colour	
Colour depth (L)	CIELAB	See right page per colour	



EN 14041
0493-CPD-0006

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





Lita is perhaps the most hard-wearing carpet tile in the world. It has been a popular flooring solution for the exhibition business for many years and is now also finding its way into other commercial environments. With its distinctive look, this fiberbonded hair tile allows creative floor plans to be created in combination with other carpet structures or products such as wood or stone. Lita offers a wide colour range of 24 colours, ranging from commercial greys and blues to more vibrant colours such as red, green, yellow and purple.

											
Colour: 8501 L 24,95 LRV 4,40	Colour: 8801 L 20,92 LRV 3,22	Colour: 8402 L 33,97 LRV 8,00	Colour: 8424 L 41,01 LRV 11,87	Colour: 8222 L 34,93 LRV 8,46	Colour: 7901 L 23,13 LRV 3,84	Colour: 9502 L 27,43 LRV 5,25	Colour: 7281 L 25,51 LRV 4,58	Colour: 7118 L 37,73 LRV 9,94	Colour: 7111 L 41,60 LRV 12,24	Colour: 9524 L 44,12 LRV 13,92	Colour: 9505 L 47,65 LRV 16,52
											
Colour: 1908 L 56,34 LRV 24,25	Colour: 6108 L 58,69 LRV 26,70	Colour: 1708 L 38,82 LRV 10,55	Colour: 2116 L 35,87 LRV 8,94	Colour: 4201 L 25,99 LRV 4,74	Colour: 2042 L 38,87 LRV 10,58	Colour: 3821 L 24,54 LRV 4,27	Colour: 9990 L 17,84 LRV 2,48	Colour: 2111 L 20,11 LRV 3,02	Colour: 2951 L 21,36 LRV 3,34	Colour: 2081 L 24,10 LRV 4,13	Colour: 9012 L 22,22 LRV 3,58



2923

LUPO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed Polypropylene
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase®
Total thickness	ISO 1765	5.6 mm 0.22 inch
Effective pile thickness	ISO 1766	2.7 mm 0.11 inch
Total mass	ISO 8543	3800 g/m ² 112.2 oz/yd ²
Total pile mass	ISO 2424	480 g/m ² 14.2 oz/yd ²
Effective pile mass	ISO 8543	290 g/m ² 08.6 oz/yd ²
Pile density	ISO 8543	0.107 g/cm ³ 0.0039 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	C _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

CE
EN 14041
0493-CPD-0002

Manufactured by:
Desso BV
PO Box 169
NL - 5140 AD Waalwijk














A basic low level loop pile carpet tile, available in 16 easily applicable colours, with a strong focus on value for money. Lupo is a strong and businesslike product. The good commercial colour range, with a strong focus on greys, blues and beiges, offers the possibility to install Lupo in numerous commercial applications.

Colour: 8901 L 18,22 LRV 2,57	Colour: 8521 L 25,68 LRV 4,64	Colour: 8431 L 29,09 LRV 5,87	Colour: 8433 L 41,18 LRV 11,98	Colour: 7381 L 28,59 LRV 5,68	Colour: 7183 L 40,11 LRV 11,31	Colour: 2932 L 33,29 LRV 7,67	Colour: 2923 L 41,50 LRV 12,18	Colour: 2046 L 45,75 LRV 15,08	Colour: 2061 L 29,28 LRV 5,95	Colour: 2931 L 21,45 LRV 3,36	Colour: 9501 L 19,92 LRV 2,97
Colour: 4202 L 31,53 LRV 6,88	Colour: 9521 L 1757 LRV 2,42	Colour: 9023 L 29,53 LRV 6,05	Colour: 9965 L 43,84 LRV 13,73								



9112

MANHATTAN

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Structured loop pile
Pile Fibre composition	ISO 2424	Solution + space dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	8.5 mm 0.33 inch
Effective pile thickness	ISO 1766	4.8 mm 0.19 inch
Total mass	ISO 8543	4700 g/m ² 138.7 oz/yd ²
Total pile mass	ISO 2424	880 g/m ² 26.0 oz/yd ²
Effective pile mass	ISO 8543	665 g/m ² 19.6 oz/yd ²
Pile density	ISO 8543	0.140 g/cm ³ 0.0051 lb/in ³
Number of tufts	ISO 1763	1520 /dm ² 127087 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC


 Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk
 EN 14041
 0493-CPD-0002
























* Bitumen only



Manhattan is a stunning, luxurious loop pile carpet tile as exciting and full of life as the city of Manhattan itself. Soft, multi-colour styling in 7 colours gives an extra chunky effect to the tiles, providing warmth and comfort as well as outstanding sound insulation.

						
Colour: 8812 L 38,82 LRV 11,14	Colour: 9980 L 39,72 LRV 11,08	Colour: 9112 L 39,78 LRV 11,12	Colour: 9103 L 40,22 LRV 11,38	Colour: 3901 L 41,14 LRV 11,95	Colour: 8851 L 41,63 LRV 12,26	Colour: 2117 L 41,71 LRV 12,31



9115/4101

MENDA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	2.6 mm 0.10 inch
Total mass	ISO 8543	4150 g/m ² 122.5 oz/yd ²
Total pile mass	ISO 2424	585 g/m ² 17.3 oz/yd ²
Effective pile mass	ISO 8543	400 g/m ² 11.8 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	1700 /dm ² 142137 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



 Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk
 EN 14041
 0493-CPD-0002

















































15113

* Bitumen only



If there is one product synonymous with performance in the business environment, it is Menda. Its strong low level loop pile structure and broad range of 36 colours offers endless opportunities for creative flooring design with long-lasting quality and aesthetics.

											
Colour: 3921 L 20,74 LRV 3,18	Colour: 8901 L 17,01 LRV 2,30	Colour: 3812 L 29,51 LRV 6,04	Colour: 3842 L 38,46 LRV 10,35	Colour: 8902 L 28,89 LRV 5,80	Colour: 8801 L 28,82 LRV 5,77	Colour: 8422 L 26,52 LRV 4,92	Colour: 8804 L 42,88 LRV 13,07	Colour: 9014 L 42,00 LRV 12,50	Colour: 8423 L 44,64 LRV 14,29	Colour: 7901 L 20,24 LRV 3,05	Colour: 7803 L 29,22 LRV 5,92
											
Colour: 8823 L 32,69 LRV 7,39	Colour: 7283 L 31,70 LRV 6,95	Colour: 6032 L 56,01 LRV 23,92	Colour: 5121 L 44,50 LRV 14,19	Colour: 4101 L 26,41 LRV 4,89	Colour: 2941 L 19,42 LRV 2,85	Colour: 2922 L 30,96 LRV 6,63	Colour: 2051 L 28,55 LRV 5,66	Colour: 2062 L 37,78 LRV 9,96	Colour: 2056 L 41,11 LRV 11,93	Colour: 2925 L 54,12 LRV 22,08	Colour: 2063 L 49,17 LRV 17,73
											
Colour: 9501 L 20,86 LRV 3,21	Colour: 9012 L 21,02 LRV 3,25	Colour: 9112 L 21,75 LRV 3,45	Colour: 9985 L 21,59 LRV 3,40	Colour: 9504 L 31,29 LRV 6,78	Colour: 9975 L 31,18 LRV 6,73	Colour: 7932 L 33,89 LRV 7,95	Colour: 9093 L 37,11 LRV 9,60	Colour: 9965 L 42,50 LRV 12,83	Colour: 9115 L 51,34 LRV 19,56	Colour: 9025 L 49,94 LRV 18,36	Colour: 9023 L 41,16 LRV 11,97



2097

MILA

Specification according to EN 1307


Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.7 mm 0.15 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	850 g/m ² 25.1 oz/yd ²
Effective pile mass	ISO 8543	545 g/m ² 16.1 oz/yd ²
Pile density	ISO 8543	0.150 g/cm ³ 0.0054 lb/in ³
Number of tufts	ISO 1763	1660 /dm ² 138793 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk








EN 14041
0493-CPD-0002



* Bitumen only



Mila comprises broadloom carpet and carpet tiles with both common and complementary colours in a densely tufted velour pile. This makes Mila ideal for all areas of a building from corridors to stairs, reception to boardroom. The depth and variety of colour encourages character such as timeless hues for classic elegance and bright accents for contemporary zones.

											
Colour: 9990 L 21,19 LRV 3,30	Colour: 9022 L 20,45 LRV 3,10	Colour: 8501 L 16,76 LRV 2,25	Colour: 8422 L 22,76 LRV 3,73	Colour: 8823 L 36,03 LRV 9,02	Colour: 8932 L 32,50 LRV 7,31	Colour: 2097 L 25,80 LRV 4,68	Colour: 2921 L 27,36 LRV 5,22	Colour: 9094 L 43,37 LRV 13,41	Colour: 2924 L 46,35 LRV 15,52	Colour: 9092 L 22,14 LRV 3,55	Colour: 9980 L 26,42 LRV 4,89
											
Colour: 9522 L 31,69 LRV 6,95	Colour: 9503 L 44,17 LRV 13,95	Colour: 9965 L 42,35 LRV 12,72	Colour: 9506 L 59,46 LRV 27,53								



9032/9051

NEO / NEO CORE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Space dyed + Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	700 g/m ² 20.7 oz/yd ²
Effective pile mass	ISO 8543	525 g/m ² 15.5 oz/yd ²
Pile density	ISO 8543	0.175 g/cm ³ 0.0063 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1 x 10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC


 Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk
 EN 14041
 0493-CPD-0002

















* Bitumen only



Neo demonstrates a new direction in the use of colour in flooring applications, for those looking to make a design statement. Bold, bright colour lines are set against a single coloured, dark setting to give the tile a vivid face and daring character, whilst irregularity in the design and differing colour intervals suggest dynamic movement. Neo Core offers great possibilities for creative combinations in any commercial environment. Where Neo's strong linear accents bring vibrant, expressive colours into an interior, Neo Core adds calm, single colours for distinctive combination possibilities, allowing for creative, unique floor design.

Neo

							
Colour: 8901 L 18,78 LRV 2,69	Colour: 9990 L 21,71 LRV 3,43	Colour: 9053 L 30,14 LRV 6,29	Colour: 9032 L 33,55 LRV 7,79	Colour: 9111 L 23,57 LRV 3,97	Colour: 2951 L 18,42 LRV 2,61	Colour: 9501 L 23,60 LRV 3,98	Colour: 9511 L 23,55 LRV 3,96
							
Colour: 8811 L 18,24 LRV 2,57	Colour: 9051 L 24,51 LRV 4,26	Colour: 9514 L 29,42 LRV 6,00	Colour: 2111 L 16,50 LRV 2,20	Colour: 9502 L 20,00 LRV 2,99	Colour: 9980 L 21,95 LRV 3,50	Colour: 2921 L 23,41 LRV 3,92	



8406

PALATINO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	5.0 mm 0.20 inch
Total mass	ISO 8543	4450 g/m ² 131.4 oz/yd ²
Total pile mass	ISO 2424	1100 g/m ² 32.5 oz/yd ²
Effective pile mass	ISO 8543	845 g/m ² 24.9 oz/yd ²
Pile density	ISO 8543	0.170 g/cm ³ 0.0061 lb/in ³
Number of tufts	ISO 1763	1500 /dm ² 125415 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of MBOC




Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk







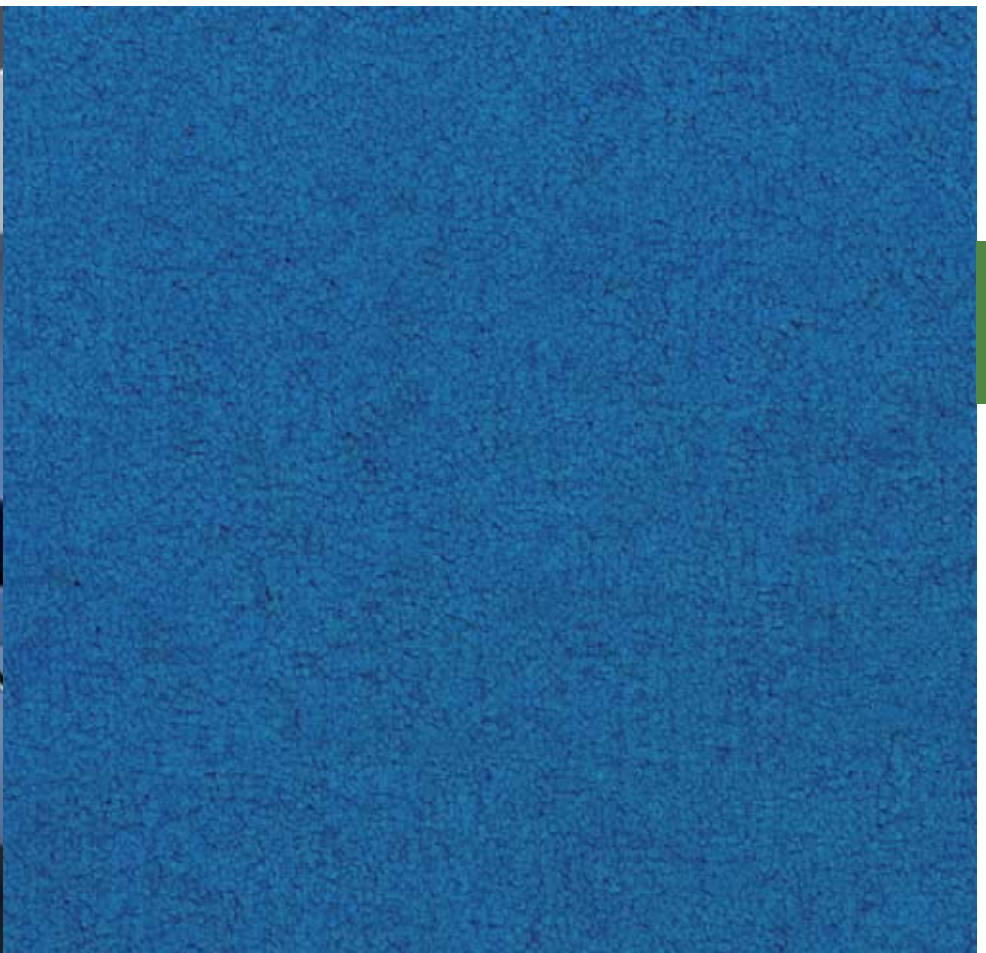





























EN 14041
0493-CPD-0002



* Bitumen only



This carpet, available in both broadloom and carpet tile, is characterized by its rich twisted cut pile construction and striking line of 36 colours. The dense structure of Palatino successfully combines a luxurious appearance with strength and durability. The wide range of versatile colours offers endless opportunities to define space and make a statement. With Palatino there are no limits for creating a distinct interior.

											
Colour: 9031 L 15,42 LRV 1,99	Colour: 8901 L 17,56 LRV 2,42	Colour: 3841 L 16,53 LRV 2,21	Colour: 8501 L 22,27 LRV 3,59	Colour: 8508 L 27,14 LRV 5,14	Colour: 8406 L 32,97 LRV 7,52	Colour: 8522 L 36,53 LRV 9,29	Colour: 8822 L 35,22 LRV 8,61	Colour: 8921 L 21,03 LRV 3,25	Colour: 8431 L 26,18 LRV 4,81	Colour: 3923 L 31,97 LRV 7,07	Colour: 8152 L 35,60 LRV 8,80
											
Colour: 7571 L 27,42 LRV 5,24	Colour: 7831 L 30,83 LRV 6,58	Colour: 7218 L 41,95 LRV 12,47	Colour: 7062 L 49,31 LRV 17,85	Colour: 6431 L 61,62 LRV 29,95	Colour: 6017 L 53,84 LRV 21,82	Colour: 4411 L 34,42 LRV 8,21	Colour: 4301 L 32,94 LRV 7,51	Colour: 4218 L 26,00 LRV 4,75	Colour: 4007 L 28,62 LRV 5,69	Colour: 4031 L 21,49 LRV 3,38	Colour: 2117 L 21,05 LRV 3,26
											
Colour: 3118 L 21,17 LRV 3,29	Colour: 9092 L 25,59 LRV 4,61	Colour: 2923 L 49,09 LRV 17,66	Colour: 1957 L 56,46 LRV 24,37	Colour: 7862 L 37,22 LRV 9,66	Colour: 9091 L 20,42 LRV 3,09	Colour: 2941 L 19,52 LRV 2,87	Colour: 9531 L 19,18 LRV 2,79	Colour: 9502 L 29,49 LRV 6,03	Colour: 9970 L 30,96 LRV 6,63	Colour: 9025 L 49,33 LRV 17,86	Colour: 9505 L 45,76 LRV 15,09



9516

PALLAS

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.0 mm 0.28 inch
Effective pile thickness	ISO 1766	4.0 mm 0.16 inch
Total mass	ISO 8543	4200 g/m ² 124.0 oz/yd ²
Total pile mass	ISO 2424	660 g/m ² 19.5 oz/yd ²
Effective pile mass	ISO 8543	430 g/m ² 12.7 oz/yd ²
Pile density	ISO 8543	0.108 g/cm ³ 0.0039 lb/in ³
Number of tufts	ISO 1763	950 /dm ² 79430 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour


With bitumen backing



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002

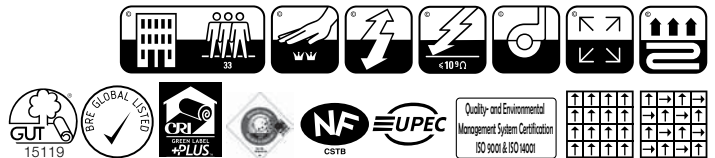


* Bitumen only



Pallas is a versatile loop pile carpet within a high-quality, contemporary collection. The abundant choice of 60 colours within this range makes it easy to integrate this floor covering into almost any design. The colour line ranges from traditional greys and blues to warm neutrals and vivid colours, offering plenty of possibilities to personalise a space within any building. Also available as broadloom in 12 colours from stock.

Colour: 9985 L 24,42 LRV 4,23	Colour: 9021 L 34,48 LRV 8,24	Colour: 3831 L 29,30 LRV 5,95	Colour: 8803 L 22,10 LRV 3,54	Colour: 8501 L 26,63 LRV 4,96	Colour: 8512 L 27,99 LRV 5,45	Colour: 8432 L 28,97 LRV 5,83	Colour: 8423 L 39,01 LRV 10,66	Colour: 8522 L 36,56 LRV 9,30	Colour: 8301 L 38,82 LRV 10,55	Colour: 8813 L 44,78 LRV 14,38	Colour: 8823 L 38,06 LRV 10,12
Colour: 9516 L 50,25 LRV 18,63	Colour: 9506 L 51,28 LRV 19,51	Colour: 9513 L 43,62 LRV 13,58	Colour: 9533 L 39,54 LRV 10,98	Colour: 8831 L 28,96 LRV 5,82	Colour: 8222 L 35,05 LRV 8,52	Colour: 8011 L 31,37 LRV 6,81	Colour: 8172 L 38,24 LRV 10,22	Colour: 7412 L 33,90 LRV 7,96	Colour: 7383 L 40,43 LRV 11,51	Colour: 7913 L 43,86 LRV 13,74	Colour: 8922 L 35,99 LRV 9,00
Colour: 1710 L 43,39 LRV 13,42	Colour: 7914 L 48,55 LRV 17,23	Colour: 7124 L 47,53 LRV 16,43	Colour: 7272 L 42,90 LRV 13,09	Colour: 2006 L 45,85 LRV 15,16	Colour: 2043 L 47,01 LRV 16,02	Colour: 2914 L 51,60 LRV 19,79	Colour: 9106 L 42,91 LRV 13,09	Colour: 9095 L 41,82 LRV 12,38	Colour: 2022 L 46,27 LRV 15,47	Colour: 6003 L 56,85 LRV 24,77	Colour: 4302 L 36,44 LRV 9,24
Colour: 5012 L 42,58 LRV 12,88	Colour: 2088 L 31,78 LRV 6,99	Colour: 4321 L 31,04 LRV 6,67	Colour: 2118 L 29,24 LRV 5,93	Colour: 2126 L 29,15 LRV 5,90	Colour: 4202 L 28,41 LRV 5,61	Colour: 4031 L 24,33 LRV 4,20	Colour: 4032 L 25,79 LRV 4,68	Colour: 2077 L 33,21 LRV 7,63	Colour: 2048 L 41,73 LRV 12,33	Colour: 5421 L 43,67 LRV 13,61	Colour: 6111 L 48,37 LRV 17,09
Colour: 2951 L 25,32 LRV 4,52	Colour: 9980 L 22,63 LRV 3,69	Colour: 9091 L 26,94 LRV 5,07	Colour: 9093 L 31,32 LRV 6,79	Colour: 9012 L 24,94 LRV 4,40	Colour: 2033 L 41,61 LRV 12,25	Colour: 9092 L 34,34 LRV 8,17	Colour: 9094 L 41,46 LRV 12,15	Colour: 9052 L 33,78 LRV 7,90	Colour: 9002 L 26,82 LRV 5,03	Colour: 2922 L 32,15 LRV 7,15	Colour: 9502 L 38,73 LRV 10,50

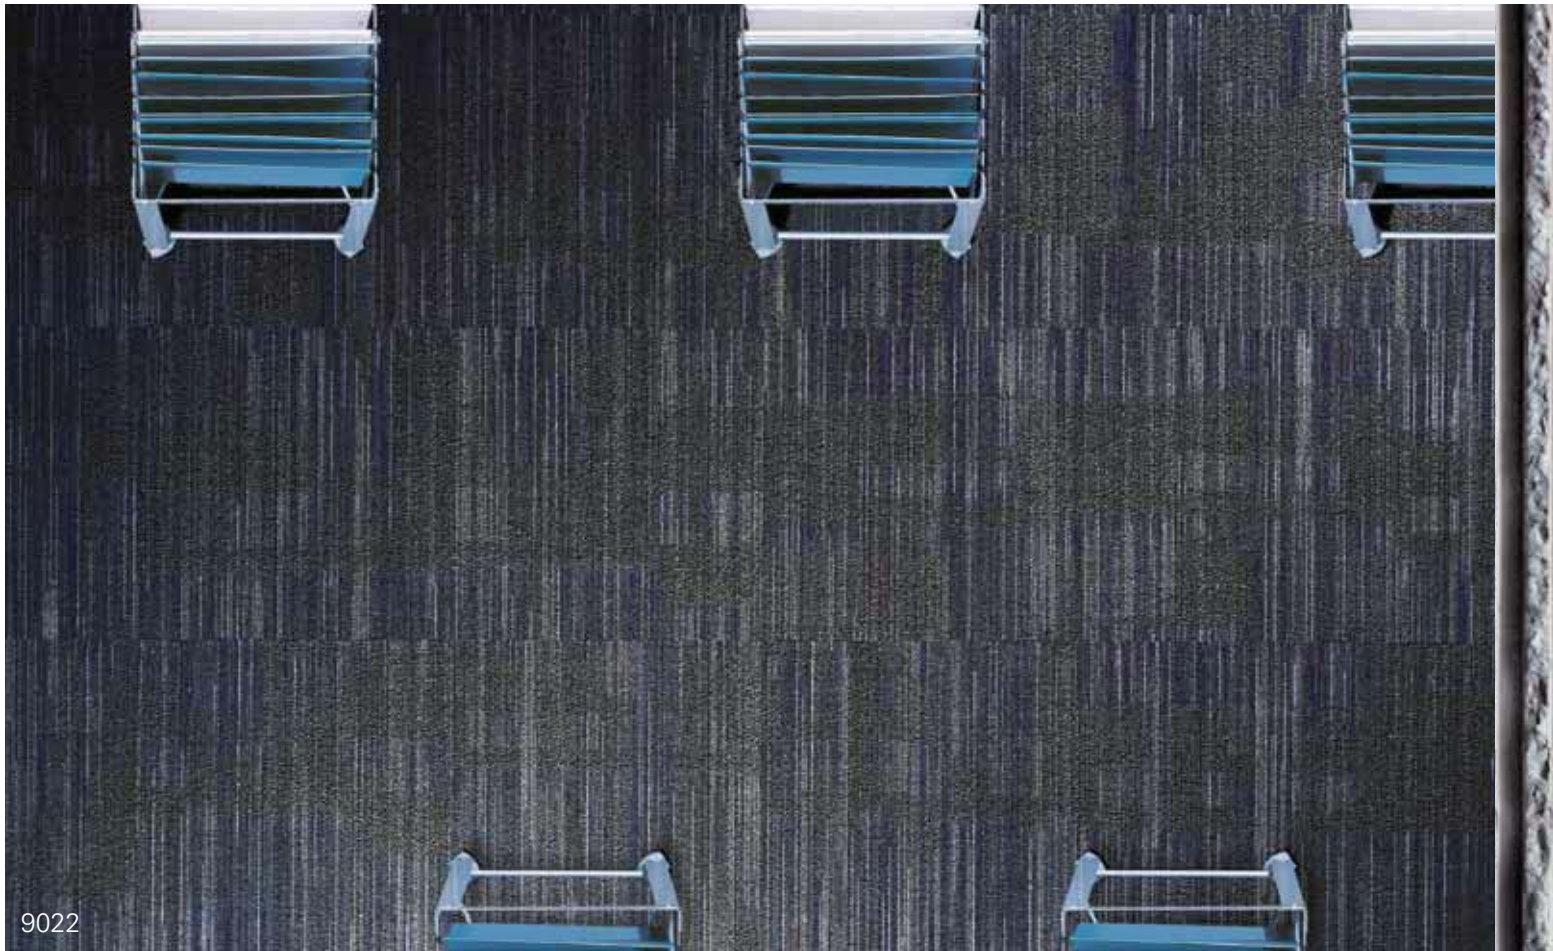

9022

PATCHES

Specification according to EN 1307

Type of manufacture	ISO 2424
Pile Fibre composition	ISO 2424
Dimensions	EN 994
Primary backing	ISO 2424
Secondary backing	ISO 2424
Total thickness	ISO 1765
Effective pile thickness	ISO 1766
Total mass	ISO 8543
Total pile mass	ISO 2424
Effective pile mass	ISO 8543
Pile density	ISO 8543
Number of tufts	ISO 1763
Stroll test	ISO 6356
Vertical resistance	ISO 10965
Classification for use	EN 1307
Dimensional stability	EN 986
Flammability	EN 13501-1
Light Reflectance Value (LRV)	BS 8493
Colour depth (L)	CIELAB

Tufted 1/10" Structured Loop pile
Space dyed + solution dyed BCF Polyamide 6
50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Polyester - polyamide fleece
Modified bitumen or EcoBase® (Polyver® · Polyscan®)
6.5 mm 0.26 inch
2.9 mm 0.11 inch
4350 g/m ² 128.4 oz/yd ²
685 g/m ² 20.2 oz/yd ²
355 g/m ² 10.5 oz/yd ²
0.120 g/cm ³ 0.0043 lb/in ³
1540 /dm ² 128759 /yd ²
≤ 2.0 kV
≤ 1x10 ⁹ Ohm
33 Commercial - heavy use
≤ 0.2 %
B ₁ - s1
See right page per colour
See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of INBC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of INBC


 EN 14041
 0493-CPD-0002

Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk


















Quality and Environmental Management System Certification
 ISO 9001 & ISO 14001



* Bitumen only

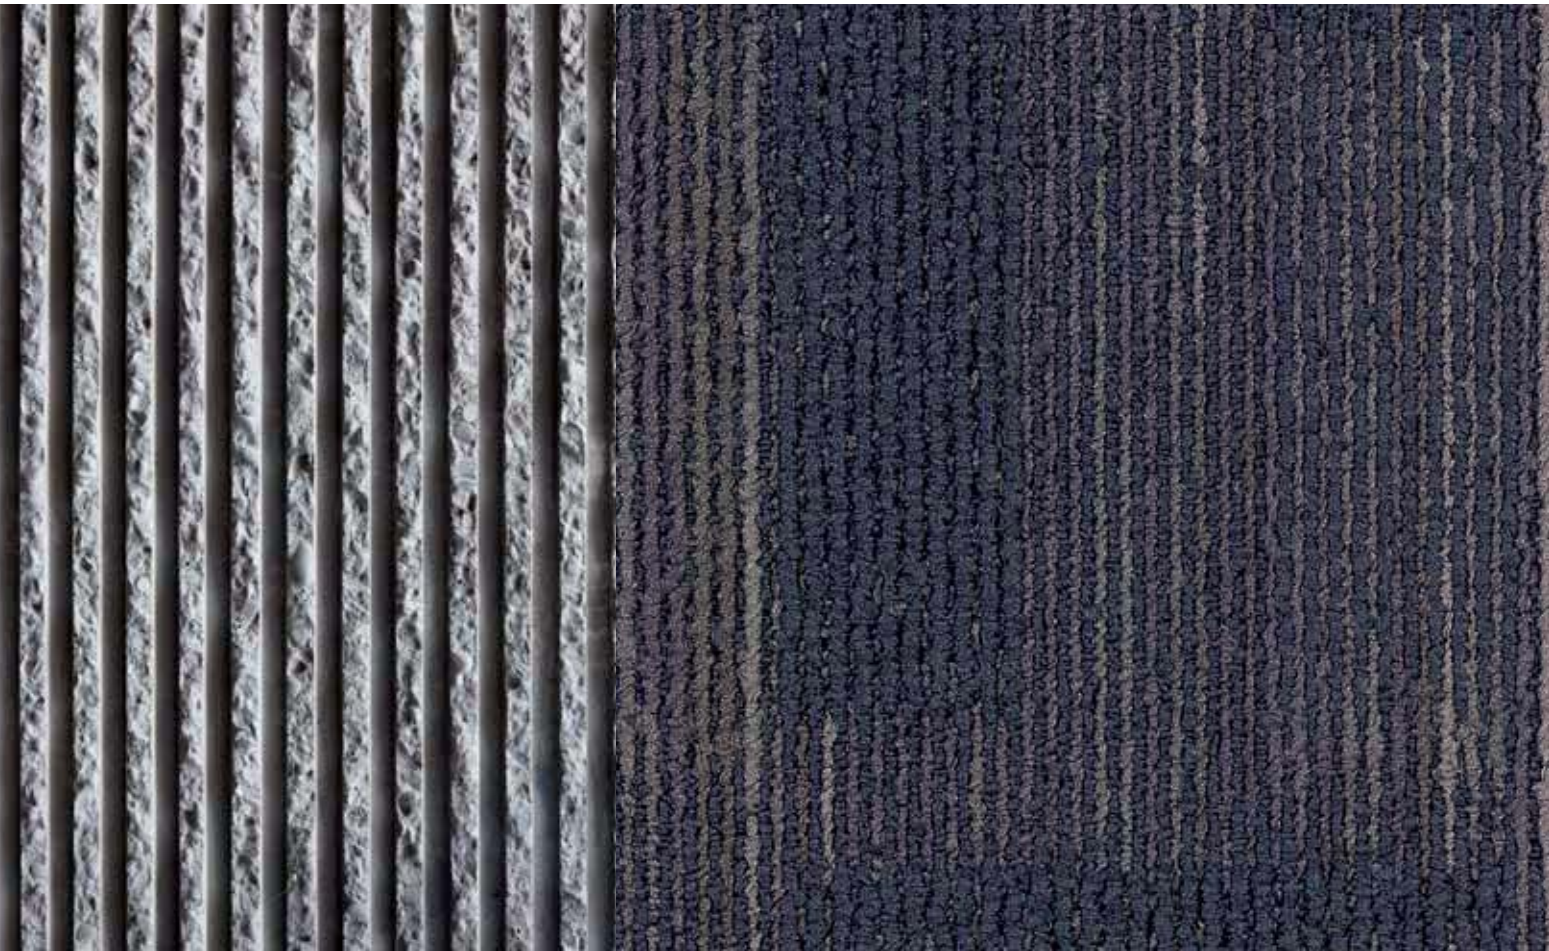

Patches is a structured loop pile carpet tile with contemporary directional and geometric styling. This product is suitable for random installation, allowing faster installation, minimum waste and maximum flexibility. Colours are linked with the Libra ranges for even more opportunities to combine linearity with the overall patchwork effect of Patches.



Colour: 9501
L 29,97
LRV 6,22



Colour: 9022
L 28,72
LRV 5,73



Colour: 2942
L 32,87
LRV 7,48



Colour: 9975
L 30,52
LRV 6,45



Colour: 2924
L 47,25
LRV 16,21



Colour: 9950
L 44,95
LRV 14,51



2118

PINTO 580

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Width	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.8 mm 0.23 inch
Effective pile thickness	ISO 1766	2.6 mm 0.10 inch
Total mass	ISO 8543	4100 g/m ² 121.0 oz/yd ²
Total pile mass	ISO 2424	580 g/m ² 17.1 oz/yd ²
Effective pile mass	ISO 8543	350 g/m ² 10.3 oz/yd ²
Pile density	ISO 8543	0.135 g/cm ³ 0.0049 lb/in ³
Number of tufts	ISO 1763	1570 /dm ² 131268 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing




Cradle to Cradle Certified® is a certification mark of MBOC

CE
EN 14041
0493-CPD-0002

Manufactured by:
Desso BV
PO Box 169
NL - 5140 AD Waalwijk




* Bitumen only

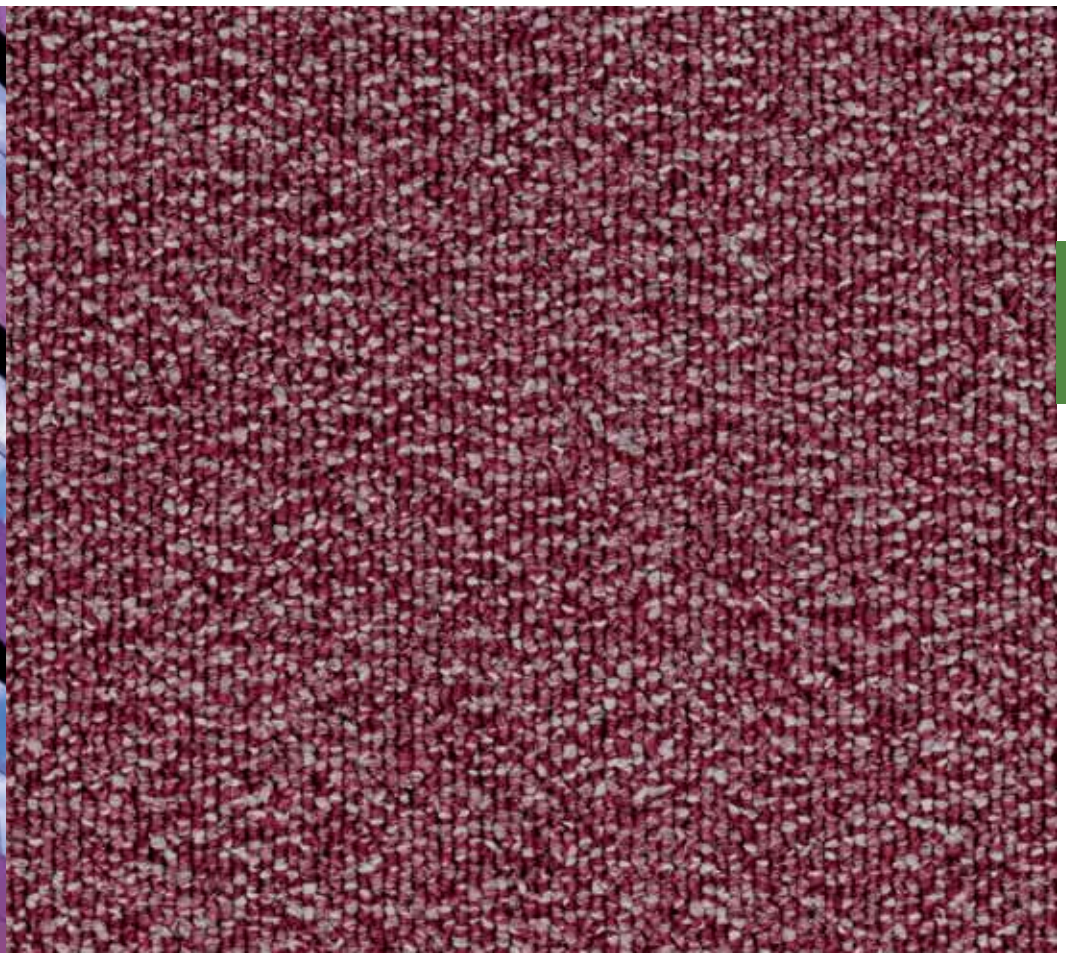

Pinto 580 is a loop pile carpet tile combining functionality with style, suitable for use in any commercial environment. Its range of subtle, natural colours gives Pinto 580 a warm, pure and 'homey' feeling. The white yarn component creates a 'chalk' effect with an appearance comparable to natural materials, such as stone and wood.

											
Colour: 9990 L 31,79 LRV 6,99	Colour: 9512 L 38,37 LRV 10,30	Colour: 3922 L 32,63 LRV 7,37	Colour: 8803 L 37,18 LRV 9,64	Colour: 8804 L 42,47 LRV 12,80	Colour: 2118 L 36,45 LRV 9,24	Colour: 2951 L 34,68 LRV 8,34	Colour: 2041 L 45,01 LRV 14,55	Colour: 2924 L 51,53 LRV 19,73	Colour: 9094 L 48,62 LRV 17,29	Colour: 7913 L 47,99 LRV 16,79	Colour: 7845 L 58,79 LRV 26,80
											
Colour: 9531 L 30,57 LRV 6,47	Colour: 9532 L 36,44 LRV 9,24	Colour: 3902 L 34,87 LRV 8,43	Colour: 3923 L 38,74 LRV 10,51	Colour: 9093 L 42,48 LRV 12,81	Colour: 9505 L 53,14 LRV 21,17						



9990

PROTECT

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8" Cut pile
Pile Fibre composition	ISO 2424	Hank dyed 80% wool - 20% polyamide
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (12 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen
Total thickness	ISO 1765	10.0 mm 0.39 inch
Effective pile thickness	ISO 1766	5.2 mm 0.20 inch
Total mass	ISO 8543	4950 g/m ² 146.1 oz/yd ²
Total pile mass	ISO 2424	1470 g/m ² 43.4 oz/yd ²
Effective pile mass	ISO 8543	790 g/m ² 23.3 oz/yd ²
Pile density	ISO 8543	0.150 g/cm ³ 0.0054 lb/in ³
Number of tufts	ISO 1763	1110 /dm ² 92807 /yd ²
Flammability	EN 13501-1	C _{s1} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




EN 14041
0493-CPD-0005

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





To safeguard floors from external dirt and moisture, Desso offers a practical solution with Protect carpet tiles. Protect effectively combines function with aesthetics to provide an effective entrance barrier to prolong the appearance of a smart interior.



Colour: 8901
L 16,56
LRV 2,21



Colour: 9990
L 21,55
LRV 3,39



Colour: 9021
L 23,18
LRV 3,85



Colour: 2922
L 32,31
LRV 7,22



PURE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.5 mm 0.10 inch
Total mass	ISO 8543	4150 g/m ² 122.5 oz/yd ²
Total pile mass	ISO 2424	580 g/m ² 17.1 oz/yd ²
Effective pile mass	ISO 8543	390 g/m ² 11.5 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC


 EN 14041
 0493-CPD-0002

Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk















* Bitumen only



2923

Pure is a modern office tile with a subtle rib-effect, creating depth and dimension for a warmer, more natural environment - even in a commercial setting. The neutral palette showcases natural colours with various shades of brown, beige and grey, as well as some more vivid colours such as red, purple and blue – all easy to combine with other interior elements.

											
Colour: 9501 L 23,64 LRV 3,99	Colour: 8811 L 22,22 LRV 3,58	Colour: 8903 L 37,36 LRV 9,73	Colour: 7944 L 44,16 LRV 13,95	Colour: 2923 L 41,02 LRV 11,88	Colour: 2046 L 38,88 LRV 10,59	Colour: 4211 L 25,62 LRV 4,62	Colour: 3811 L 26,22 LRV 4,82	Colour: 9091 L 25,74 LRV 4,66	Colour: 2922 L 33,05 LRV 7,56	Colour: 9096 L 45,70 LRV 15,05	Colour: 2915 L 48,00 LRV 16,79
											
Colour: 9521 L 30,16 LRV 6,30	Colour: 9523 L 37,41 LRV 9,76	Colour: 9506 L 47,15 LRV 16,14	Colour: 9503 L 37,27 LRV 9,68								

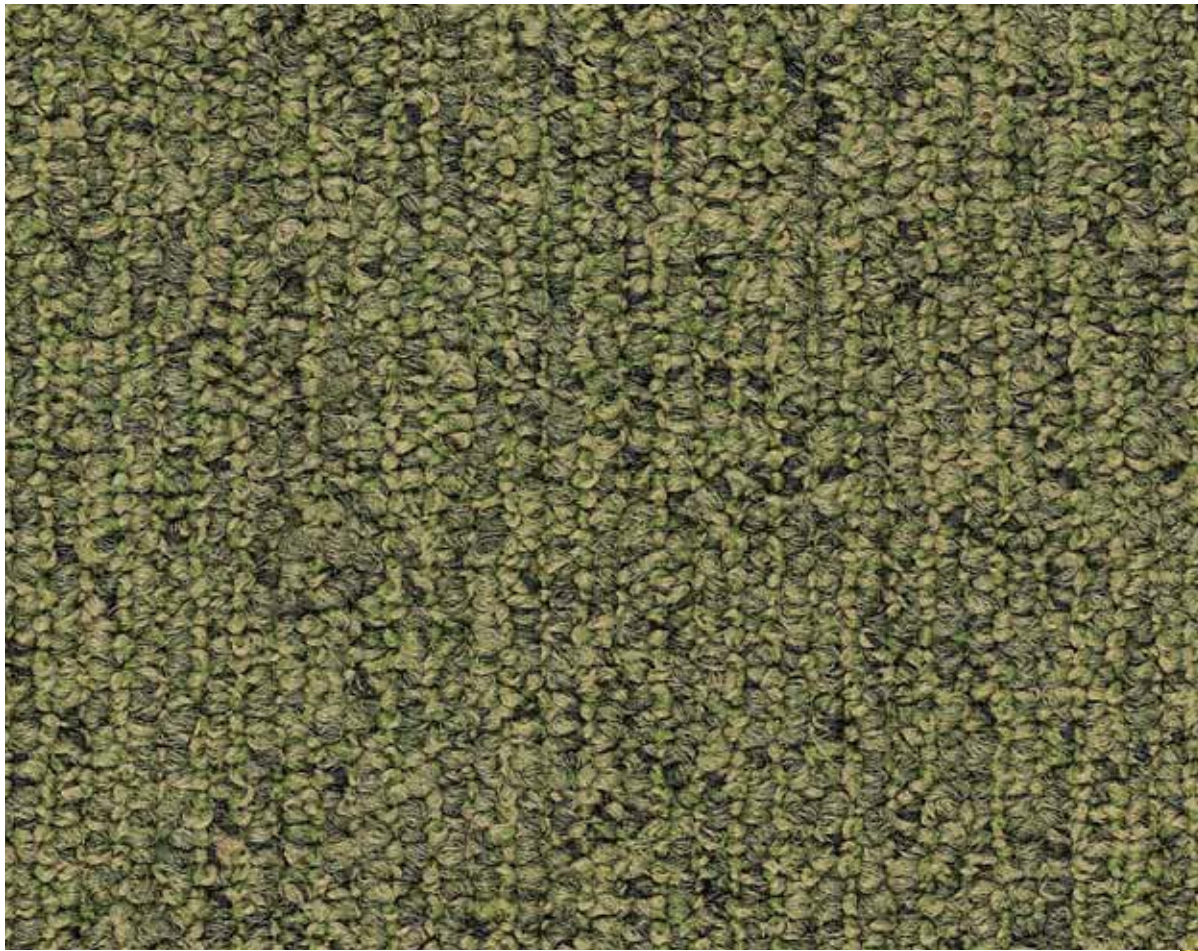

RECLAIM RIBS

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" structured loop pile
Pile Fibre composition	ISO 2424	Solution dyed Recycled BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® - Polyscan®
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.5 mm 0.14 inch
Total mass	ISO 8543	4250 g/m ² 125.5 oz/yd ²
Total pile mass	ISO 2424	670 g/m ² 19.8 oz/yd ²
Effective pile mass	ISO 8543	540 g/m ² 15.9 oz/yd ²
Pile density	ISO 8543	0.154 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour


 Manufactured by:
 Desso BV
 PO Box 169
 NL - 5140 AD Waalwijk
 EN 14041
 0493-CPD-0002
























7001

Reclaim Ribs demonstrates a unique combination of eco-effective processing and understated design. It displays a subtle rib effect, in a wide variety of natural colours, which helps to create an identity in the interior. The Econyl yarn consists of 70% post-industrial recycled content. It has also received a GUI stamp to certify that this product improves indoor air quality by effectively reducing fine dust in indoor environments.

											
Colour: 9501 L 18,02 LRV 2,52	Colour: 8802 L 28,25 LRV 5,55	Colour: 8511 L 27,70 LRV 5,35	Colour: 8301 L 30,03 LRV 6,25	Colour: 7001 L 42,56 LRV 12,86	Colour: 5007 L 34,16 LRV 8,08	Colour: 4311 L 22,73 LRV 3,72	Colour: 2043 L 33,12 LRV 7,59	Colour: 2002 L 36,37 LRV 9,20	Colour: 2924 L 41,85 LRV 12,40	Colour: 2951 L 24,82 LRV 4,36	Colour: 9093 L 26,43 LRV 4,89
											
Colour: 9094 L 31,05 LRV 6,67	Colour: 8902 L 32,24 LRV 7,19	Colour: 8933 L 42,67 LRV 12,93	Colour: 9950 L 42,30 LRV 12,69								



SAND

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.4 mm 0.09 inch
Total mass	ISO 8543	4150 g/m ² 122.5 oz/yd ²
Total pile mass	ISO 2424	600 g/m ² 17.7 oz/yd ²
Effective pile mass	ISO 8543	440 g/m ² 13.0 oz/yd ²
Pile density	ISO 8543	0.183 g/cm ³ 0.0066 lb/in ³
Number of tufts	ISO 1763	1970 /dm ² 164712 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC




Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





7081

Sand is a carpet tile with a very tight, low level loop pile structure. The four colours in the yarn provide very fine detail with the appearance of a luxurious cut pile. The range of 18 colours, covering both the commercial, neutral and more vibrant hues, ensures that the carpet becomes a focal point in the room. Sand can be combined with Sand Stripe for even more possibilities in creative flooring design.

											
Colour: 8902 L 30,25 LRV 6,34	Colour: 3922 L 28,82 LRV 5,77	Colour: 8501 L 25, 97 LRV 4, 74	Colour: 9505 L 40,63 LRV 11,63	Colour: 8332 L 36,94 LRV 9,51	Colour: 7832 L 36,80 LRV 9,43	Colour: 7081 L 43,33 LRV 13,38	Colour: 5012 L 39,24 LRV 10,80	Colour: 4301 L 32,51 LRV 7,31	Colour: 4101 L 29,49 LRV 6,03	Colour: 3902 L 27,41 LRV 5,24	Colour: 3821 L 26,83 LRV 5,03
											
Colour: 2931 L 29,38 LRV 5,99	Colour: 2922 L 35,95 LRV 8,98	Colour: 2914 L 41,55 LRV 12,21	Colour: 9980 L 28,72 LRV 5,73	Colour: 9522 L 34,51 LRV 8,26	Colour: 9096 L 43,27 LRV 13,34						



SAND STRIPE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.4 mm 0.09 inch
Total mass	ISO 8543	4150 g/m ² 122.5 oz/yd ²
Total pile mass	ISO 2424	580 g/m ² 17.1 oz/yd ²
Effective pile mass	ISO 8543	430 g/m ² 12.7 oz/yd ²
Pile density	ISO 8543	0.179 g/cm ³ 0.0065 lb/in ³
Number of tufts	ISO 1763	1615 /dm ² 135030 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing




Cradle to Cradle Certified® is a certification mark of NBOC

CE
EN 14041
0493-CPD-0002

Manufactured by:
Desso BV
PO Box 169
NL - 5140 AD Waalwijk

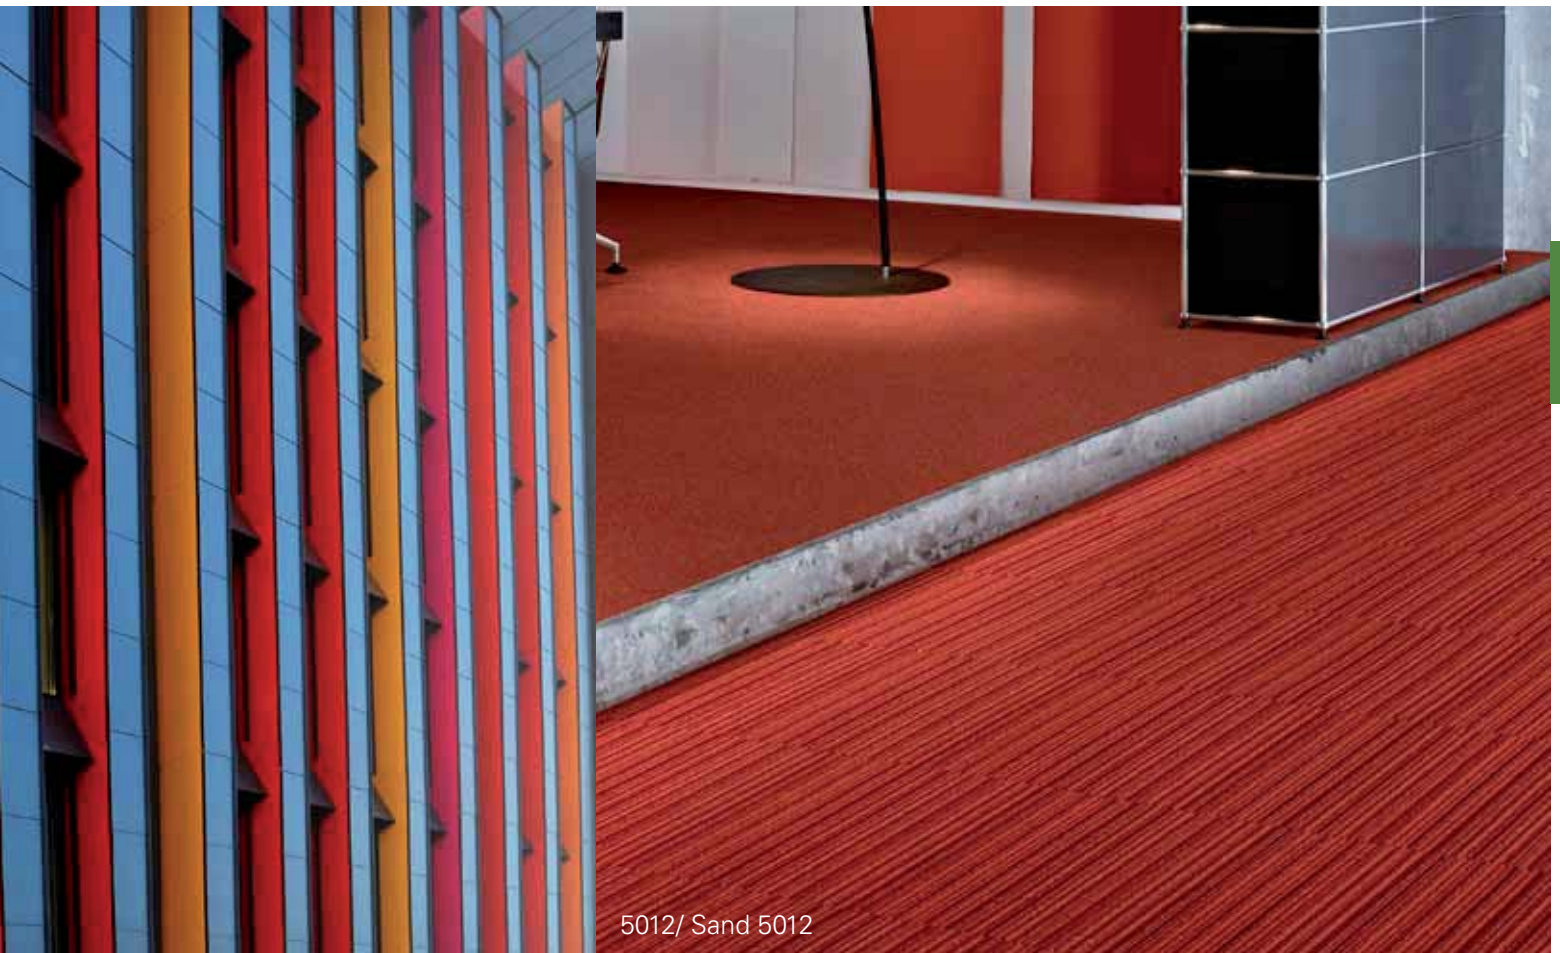

5012/ Sand 5012

Strong and colourful linear design characterizes the carpet tile product Sand Stripe. The low level loop pile structure consists of various single coloured yarns and one multi-coloured yarn. The balanced colour range of Sand Stripe includes neutral tones in grey, brown/beige and blue, as well as stronger, more outspoken accent colours in green, orange and red. Sand Stripe can also be combined with other products to create accent areas, borders or rug-like surfaces.

								
Colour: 3922 L 28,49 LRV 5,64	Colour: 8332 L 28,94 LRV 5,82	Colour: 7832 L 33,95 LRV 7,99	Colour: 5012 L 35,71 LRV 8,86	Colour: 4101 L 24,98 LRV 4,41	Colour: 2931 L 25,68 LRV 4,64	Colour: 9501 L 38,38 LRV 10,30	Colour: 3922 L 28,49 LRV 5,64	Colour: 2914 L 47,60 LRV 16,48



9980/9095

SCAPE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	4350 g/m ² 128.4 oz/yd ²
Total pile mass	ISO 2424	730 g/m ² 21.5 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	2130 /dm ² 178089 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of MBOC

CE
EN 14041
0493-CPD-0002

Manufactured by:
Desso BV
PO Box 169
NL - 5140 AD Waalwijk




* Bitumen only



This carpet tile uses structure as its primary expression. Irregular highs and lows create a hand-made, natural effect, emphasizing the fabric nature of the floor covering. A spectrum of eighteen colours is available for Scape, ranging from soft neutrals (brown, grey and beige) to stronger colours (deep red, dark blue, aqua blue and purple).

											
Colour: 8901 L 16,50 LRV 2,20	Colour: 8802 L 26,50 LRV 4,92	Colour: 8842 L 37,92 LRV 10,04	Colour: 2045 L 48,12 LRV 16,89	Colour: 2067 L 29,60 LRV 6,07	Colour: 4101 L 25,06 LRV 4,43	Colour: 4321 L 23,83 LRV 4,05	Colour: 7942 L 32,53 LRV 7,32	Colour: 2943 L 38,94 LRV 10,63	Colour: 9522 L 31,42 LRV 6,83	Colour: 9091 L 21,27 LRV 3,32	Colour: 9001 L 17,17 LRV 2,34
											
Colour: 9013 L 27,39 LRV 5,23	Colour: 3911 L 18,88 LRV 2,72	Colour: 9980 L 20,61 LRV 3,14	Colour: 9512 L 31,11 LRV 6,70	Colour: 9023 L 35,20 LRV 8,60	Colour: 9095 L 42,23 LRV 12,65						



2921

SIENNA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.1 mm 0.08 inch
Total mass	ISO 8543	4150 g/m ² 122.5 oz/yd ²
Total pile mass	ISO 2424	580 g/m ² 17.1 oz/yd ²
Effective pile mass	ISO 8543	360 g/m ² 10.6 oz/yd ²
Pile density	ISO 8543	0.169 g/cm ³ 0.0061 lb/in ³
Number of tufts	ISO 1763	2130 /dm ² 178089 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



BASIC
Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing




SILVER
Cradle to Cradle Certified® is a certification mark of NBOC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk










EN 14041
0493-CPD-0002



* Bitumen only



Sienna's rich variety of colours allows you to create an inviting ambience within any commercial environment. This low level loop carpet tile combines stylish appearance and comfort with high performance and easy maintenance, making it ideal for all commercial applications.

											
Colour: 3021 L 24,94 LRV 4,40	Colour: 3111 L 26,99 LRV 5,09	Colour: 3811 L 21,19 LRV 3,29	Colour: 8411 L 25,62 LRV 4,62	Colour: 8313 L 31,55 LRV 6,89	Colour: 8802 L 37,40 LRV 9,76	Colour: 9031 L 23,32 LRV 3,89	Colour: 8171 L 27,23 LRV 5,18	Colour: 9970 L 37,87 LRV 10,02	Colour: 9955 L 37,22 LRV 9,66	Colour: 7561 L 33,23 LRV 7,64	Colour: 7412 L 32,26 LRV 7,20
											
Colour: 7283 L 35,68 LRV 8,84	Colour: 8224 L 40,06 LRV 11,29	Colour: 9606 L 46,02 LRV 15,29	Colour: 4301 L 30,34 LRV 6,38	Colour: 2117 L 24,43 LRV 4,23	Colour: 4031 L 22,32 LRV 3,60	Colour: 9001 L 21,56 LRV 3,39	Colour: 9531 L 25,80 LRV 4,68	Colour: 2921 L 27,45 LRV 5,25	Colour: 9985 L 28,09 LRV 5,49	Colour: 2933 L 35,94 LRV 8,98	Colour: 2053 L 36,90 LRV 9,48



STRATOS

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver®)
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	2.7 mm 0.11 inch
Total mass	ISO 8543	4100 g/m ² 121.0 oz/yd ²
Total pile mass	ISO 2424	550 g/m ² 16.2 oz/yd ²
Effective pile mass	ISO 8543	360 g/m ² 10.6 oz/yd ²
Pile density	ISO 8543	0.133 g/cm ³ 0.0048 lb/in ³
Number of tufts	ISO 1763	1580 /dm ² 132104 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MBOC

With EcoBase® backing




Cradle to Cradle Certified® is a certification mark of MBOC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002







* Bitumen only



2041



Stratos is a functional carpet tile with an attractive corporate appearance, making it easy to use in any modern office environment. With its strong, dense loop pile structure, Stratos offers excellent performance at a competitive price level. The colour range offers a wide variety of good commercial colours, easy to combine with other materials such as wood, stone or metal.

											
Colour: 8811 L 21,17 LRV 3,29	Colour: 8901 L 22,32 LRV 3,60	Colour: 3842 L 28,48 LRV 5,64	Colour: 8313 L 33,40 LRV 7,72	Colour: 8412 L 29,20 LRV 5,92	Colour: 8803 L 39,83 LRV 11,15	Colour: 7913 L 31,01 LRV 6,65	Colour: 8842 L 33,18 LRV 7,62	Colour: 7182 L 33,41 LRV 7,73	Colour: 7074 L 47,78 LRV 16,62	Colour: 4322 L 32,28 LRV 7,21	Colour: 4421 L 27,21 LRV 5,17
											
Colour: 2041 L 30,01 LRV 6,24	Colour: 2044 L 45,62 LRV 14,99	Colour: 5411 L 41,56 LRV 12,22	Colour: 9001 L 20,00 LRV 2,99	Colour: 9990 L 23,42 LRV 3,92	Colour: 9985 L 29,22 LRV 5,92	Colour: 9960 L 35,23 LRV 8,61	Colour: 9093 L 37,66 LRV 9,90	Colour: 9094 L 43,92 LRV 13,78	Colour: 9930 L 54,13 LRV 22,09	Colour: 9104 L 45,86 LRV 15,16	Colour: 9955 L 44,97 LRV 14,52



SUPIRA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	4350 g/m ² 128.4 oz/yd ²
Total pile mass	ISO 2424	740 g/m ² 21.8 oz/yd ²
Effective pile mass	ISO 8543	495 g/m ² 14.6 oz/yd ²
Pile density	ISO 8543	0.165 g/cm ³ 0.0060 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC




Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality and Environmental Management System Certification ISO 9001 & ISO 14001



* Bitumen only



9975

Supira's rich structure and strong colours offer multiple design options within one product. Its subtle high-low weave simultaneously gives the impression of soft, voluminous carpeting and strong, bold flooring. Small highlight stripes in multiple bright colours, against a dark background palette of slate greys, blues, browns and reds, create the impression of a two-layer effect in the carpet.



Colour: 9021
L 18,19
LRV 2,56



Colour: 9501
L 21,03
LRV 3,25



Colour: 9092
L 23,64
LRV 3,99




Colour: 9001
L 16,28
LRV 2,15



Colour: 9532
L 18,77
LRV 2,69



Colour: 9975
L 20,83
LRV 3,20

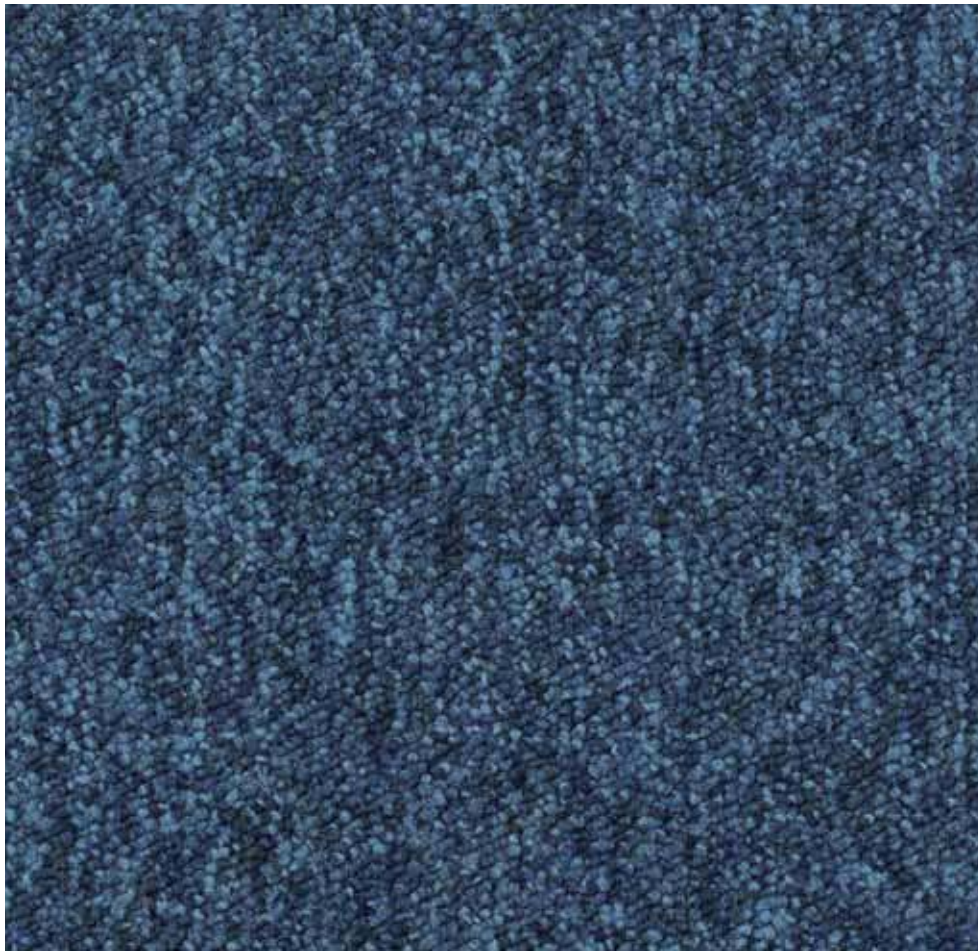

8822

TEMPRA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50x50 cm / 19.68"x19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	5.0 mm 0.20 inch
Effective pile thickness	ISO 1766	2.0 mm 0.08 inch
Total mass	ISO 8543	4100 g/m ² 121.0 oz/yd ²
Total pile mass	ISO 2424	580 g/m ² 17.1 oz/yd ²
Effective pile mass	ISO 8543	290 g/m ² 08.6 oz/yd ²
Pile density	ISO 8543	0.145 g/cm ³ 0.0052 lb/in ³
Number of tufts	ISO 1763	1620 /dm ² 135448 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.20 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC




EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk



* Bitumen only

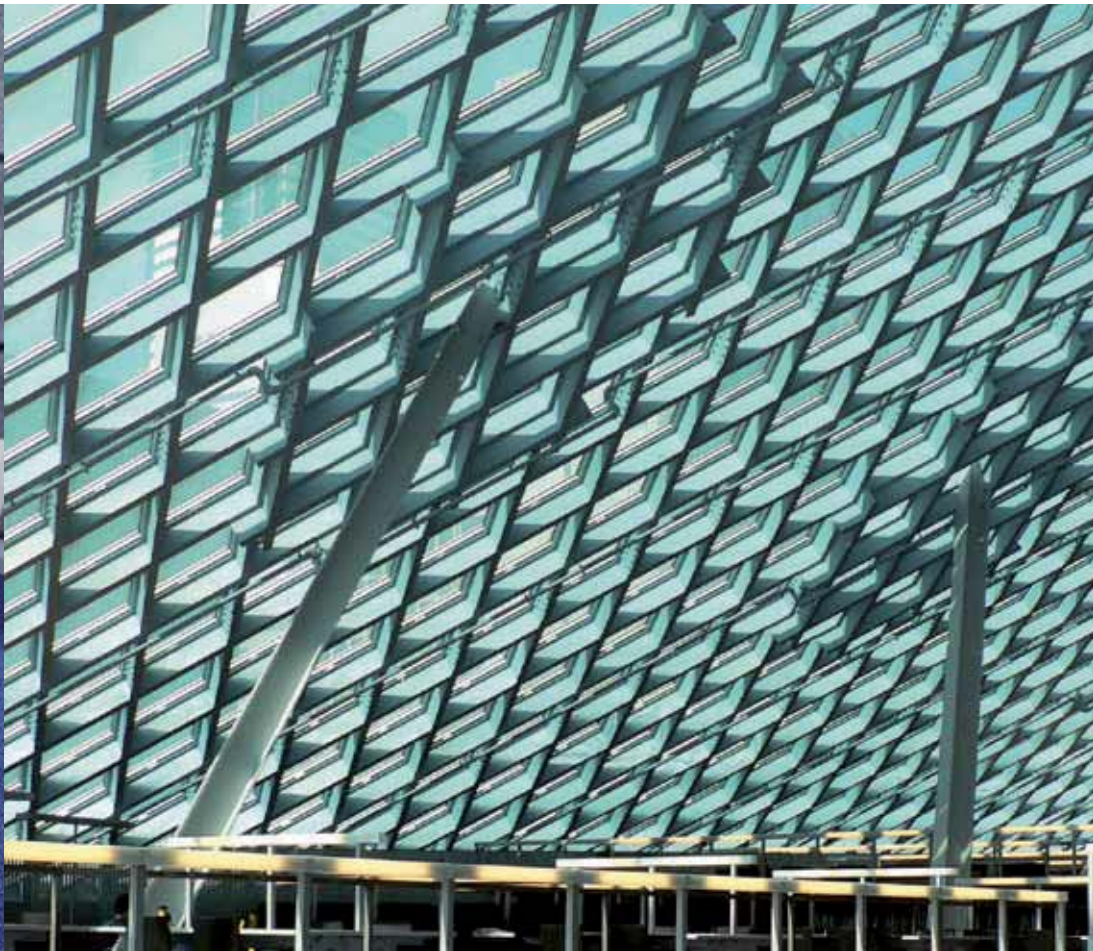

Tempra is a range of extremely practical carpet tiles that is contemporary yet timeless. The choice of 60 colours offers endless opportunities for creative interior designs. With its dense low level loop pile structure and strong colours, this exceptionally hardwearing carpet creates just the right lively style to inspire any busy team.

Colour: 3831 L 18,74 LRV 2,69	Colour: 3007 L 22,31 LRV 3,60	Colour: 3841 L 19,94 LRV 2,97	Colour: 8801 L 26,05 LRV 4,76	Colour: 3021 L 25,96 LRV 4,73	Colour: 9022 L 32,01 LRV 7,09	Colour: 8524 L 40,64 LRV 11,64	Colour: 3013 L 31,24 LRV 6,75	Colour: 8502 L 27,64 LRV 5,32	Colour: 8412 L 31,87 LRV 7,03	Colour: 8225 L 48,94 LRV 17,54	Colour: 8831 L 31,37 LRV 6,81
Colour: 8822 L 32,28 LRV 7,21	Colour: 8212 L 25,02 LRV 4,42	Colour: 8213 L 32,06 LRV 7,11	Colour: 8111 L 25,53 LRV 4,59	Colour: 7274 L 28,16 LRV 5,52	Colour: 7331 L 28,33 LRV 5,58	Colour: 7261 L 36,43 LRV 9,23	Colour: 3011 L 42,52 LRV 12,84	Colour: 6211 L 37,89 LRV 10,02	Colour: 6203 L 51,06 LRV 19,32	Colour: 6112 L 46,14 LRV 15,37	Colour: 6018 L 46,95 LRV 15,98
Colour: 2036 L 47,04 LRV 16,05	Colour: 1710 L 44,52 LRV 14,20	Colour: 9095 L 44,61 LRV 14,26	Colour: 9093 L 38,99 LRV 10,65	Colour: 2045 L 40,85 LRV 11,77	Colour: 5202 L 34,37 LRV 8,19	Colour: 2063 L 33,26 LRV 7,66	Colour: 5411 L 37,36 LRV 9,73	Colour: 5128 L 32,65 LRV 7,38	Colour: 4331 L 30,94 LRV 6,62	Colour: 5011 L 26,78 LRV 5,02	Colour: 4311 L 25,91 LRV 4,71
Colour: 4101 L 24,79 LRV 4,35	Colour: 2127 L 22,39 LRV 3,62	Colour: 2108 L 24,50 LRV 4,26	Colour: 2088 L 16,66 LRV 2,23	Colour: 3421 L 18,31 LRV 2,59	Colour: 2081 L 18,94 LRV 2,73	Colour: 2031 L 25,49 LRV 4,57	Colour: 2051 L 26,19 LRV 4,81	Colour: 2041 L 32,90 LRV 7,49	Colour: 9533 L 43,59 LRV 13,55	Colour: 1320 L 51,59 LRV 19,78	Colour: 9511 L 21,55 LRV 3,39
Colour: 9531 L 20,36 LRV 3,08	Colour: 9532 L 25,42 LRV 4,55	Colour: 9091 L 21,60 LRV 3,41	Colour: 9501 L 28,37 LRV 5,60	Colour: 9502 L 35,30 LRV 8,65	Colour: 9513 L 31,46 LRV 6,85	Colour: 9021 L 24,19 LRV 4,16	Colour: 9023 L 36,59 LRV 9,32	Colour: 8903 L 41,96 LRV 12,47	Colour: 8904 L 50,37 LRV 18,73	Colour: 9504 L 46,59 LRV 15,71	Colour: 1304 L 55,52 LRV 23,44



9025/4202

TORSO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	8.0 mm 0.31 inch
Effective pile thickness	ISO 1766	4.0 mm 0.16 inch
Total mass	ISO 8543	4200 g/m ² 123.9 oz/yd ²
Total pile mass	ISO 2424	850 g/m ² 25.1 oz/yd ²
Effective pile mass	ISO 8543	650 g/m ² 19.2 oz/yd ²
Pile density	ISO 8543	0.160 g/cm ³ 0.0058 lb/in ³
Number of tufts	ISO 1763	1930 /dm ² 161367 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of INBC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of INBC




EN 14041
0493-CPD-0002

Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk




* Bitumen only

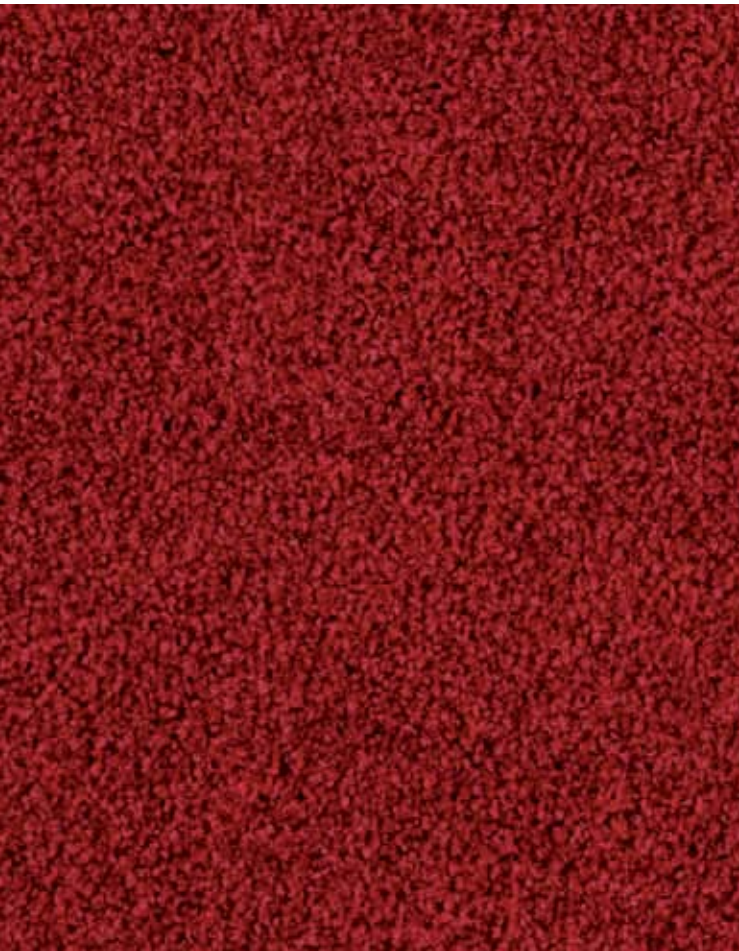

Torso is a luxurious but durable cut pile carpet, available in both broadloom and carpet tiles. A subtle combination of light and dark tones adds depth of colour and creates a rich appearance. With a broad range of 60 contemporary colours (20 colours in broadloom), Torso provides a range of exciting shades for any commercial environment. Torso is luxurious but practical, tough yet tactile.

Colour: 9012 L 18,88 LRV 2,72	Colour: 9022 L 23,16 LRV 3,85	Colour: 8521 L 22,10 LRV 3,54	Colour: 8813 L 19,45 LRV 2,85	Colour: 3111 L 24,23 LRV 4,17	Colour: 3011 L 25,05 LRV 4,43	Colour: 8422 L 26,43 LRV 4,89	Colour: 8501 L 29,75 LRV 6,13	Colour: 8517 L 36,49 LRV 9,27	Colour: 8411 L 37,02 LRV 9,55	Colour: 8412 L 37,37 LRV 9,74	Colour: 8903 L 26,60 LRV 4,95
Colour: 9024 L 33,25 LRV 7,65	Colour: 8803 L 32,12 LRV 7,14	Colour: 8311 L 29,30 LRV 5,95	Colour: 8433 L 38,84 LRV 10,56	Colour: 8823 L 43,79 LRV 13,69	Colour: 8161 L 24,21 LRV 4,17	Colour: 7922 L 29,36 LRV 5,98	Colour: 7811 L 25,98 LRV 4,74	Colour: 7412 L 33,56 LRV 7,80	Colour: 7322 L 36,33 LRV 9,18	Colour: 7261 L 45,06 LRV 14,59	Colour: 7082 L 48,15 LRV 16,91
Colour: 7863 L 39,02 LRV 10,67	Colour: 7290 L 37,07 LRV 9,57	Colour: 2914 L 32,57 LRV 7,34	Colour: 2915 L 45,43 LRV 14,85	Colour: 9094 L 48,21 LRV 16,96	Colour: 9505 L 51,74 LRV 19,92	Colour: 9104 L 40,71 LRV 11,68	Colour: 2931 L 34,40 LRV 8,20	Colour: 2922 L 26,33 LRV 4,86	Colour: 2921 L 22,56 LRV 3,67	Colour: 9193 L 24,93 LRV 4,39	Colour: 3901 L 23,01 LRV 3,80
Colour: 2952 L 18,03 LRV 2,52	Colour: 2042 L 24,04 LRV 4,11	Colour: 2053 L 31,30 LRV 6,78	Colour: 2047 L 33,75 LRV 7,89	Colour: 5421 L 48,34 LRV 17,06	Colour: 6102 L 57,89 LRV 25,84	Colour: 5213 L 43,80 LRV 13,70	Colour: 4323 L 37,81 LRV 9,98	Colour: 5103 L 37,76 LRV 9,95	Colour: 5021 L 29,39 LRV 5,99	Colour: 4202 L 26,24 LRV 4,83	Colour: 2087 L 26,57 LRV 4,94
Colour: 2117 L 24,56 LRV 4,27	Colour: 2102 L 22,06 LRV 3,53	Colour: 4021 L 17,00 LRV 2,30	Colour: 9092 L 19,69 LRV 2,91	Colour: 9061 L 17,98 LRV 2,51	Colour: 9502 L 25,88 LRV 4,71	Colour: 9113 L 21,86 LRV 3,48	Colour: 7942 L 30,55 LRV 6,46	Colour: 3922 L 32,38 LRV 7,25	Colour: 9533 L 35,10 LRV 8,55	Colour: 9975 L 38,67 LRV 10,47	Colour: 9025 L 53,34 LRV 21,36

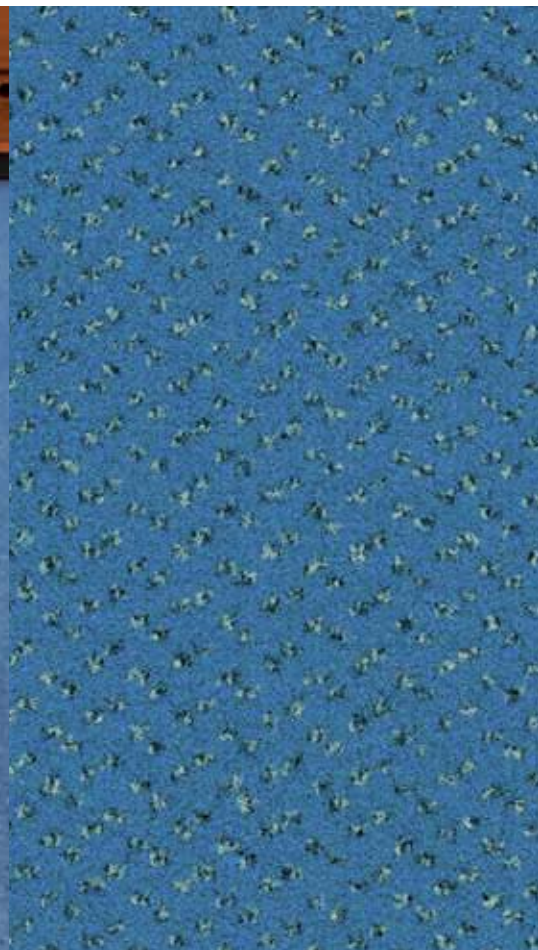

8423

TRAPEZ

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed Continuous BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen (Polyver® Polyscan®)
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.2 mm 0.13 inch
Total mass	ISO 8543	4200 g/m ² 124.0 oz/yd ²
Total pile mass	ISO 2424	750 g/m ² 22.1 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.145 g/cm ³ 0.0052 lb/in ³
Number of tufts	ISO 1763	1940 /dm ² 162203 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0,2%
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of MSC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





Trapez is the perfect solution for both large and small areas, providing a luxurious underfoot feel with long-lasting appearance. With a choice of tile or broadloom in each colour, it can easily be used for corridors or stairs, open areas or raised access floors. The wide colour range covers the entire colour spectrum, from greys and blues to more vibrant accent colours.

											
Colour: 9985 L 16,88 LRV 2,28	Colour: 9021 L 15,99 LRV 2,10	Colour: 3921 L 18,80 LRV 2,70	Colour: 8811 L 17,34 LRV 2,37	Colour: 3841 L 15,34 LRV 1,97	Colour: 8801 L 28,94 LRV 5,82	Colour: 8422 L 28,87 LRV 5,79	Colour: 8423 L 35,23 LRV 8,61	Colour: 8803 L 37,08 LRV 9,58	Colour: 8832 L 40,01 LRV 11,26	Colour: 8073 L 32,26 LRV 7,20	Colour: 8161 L 29,41 LRV 6,00
											
Colour: 7833 L 42,00 LRV 12,50	Colour: 2048 L 44,80 LRV 14,40	Colour: 2043 L 38,54 LRV 10,39	Colour: 2943 L 40,62 LRV 11,63	Colour: 2086 L 34,16 LRV 8,09	Colour: 4102 L 28,68 LRV 5,71	Colour: 2127 L 23,00 LRV 3,80	Colour: 2952 L 26,25 LRV 4,83	Colour: 9103 L 31,38 LRV 6,81	Colour: 9023 L 28,27 LRV 5,56	Colour: 9033 L 33,76 LRV 7,89	Colour: 8905 L 41,85 LRV 12,40



TREE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Structured loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase® (Polyver® · Polyscan®)
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	3.5 mm 0.14 inch
Total mass	ISO 8543	4450 g/m ² 131.3 oz/yd ²
Total pile mass	ISO 2424	690 g/m ² 20.3 oz/yd ²
Effective pile mass	ISO 8543	465 g/m ² 13.7 oz/yd ²
Pile density	ISO 8543	0.135 g/cm ³ 0.0049 lb/in ³
Number of tufts	ISO 1763	1500 /dm ² 125415 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical Resistance	ISO 10965	≤ 1 × 10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

With bitumen backing



Cradle to Cradle Certified® is a certification mark of NBOC

With EcoBase® backing



Cradle to Cradle Certified® is a certification mark of NBOC



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002












































* Bitumen only



2915

Tree is influenced by the tactile character and organic irregularities of bark and grained wood. The colour line consists of a subtle blend of tones that, combined with the rich texture, generate a feeling of warmth and comfort. Shades of grey and blue compliment browns and beiges - all with their roots in nature and the elements.

											
Colour: 9990 L 16,01 LRV 2,10	Colour: 3841 L 18,32 LRV 2,59	Colour: 2941 L 19,96 LRV 2,98	Colour: 2072 L 28,41 LRV 5,61	Colour: 9104 L 33,17 LRV 7,61	Colour: 2044 L 47,65 LRV 16,52	Colour: 2915 L 46,39 LRV 15,56	Colour: 9001 L 17,15 LRV 2,33	Colour: 9111 L 21,62 LRV 3,41	Colour: 9501 L 22,84 LRV 3,75	Colour: 9532 L 29,82 LRV 6,16	Colour: 9504 L 36,50 LRV 9,27



7018

TWIST

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous Polyamide 6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (12 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen or EcoBase®
Total thickness	ISO 1765	11.5 mm 0.46 inch
Effective pile thickness	ISO 1766	10.0 mm 0.40 inch
Total mass	ISO 8543	5100 g/m ² 150.0 oz/yd ²
Total pile mass	ISO 2424	1550 g/m ² 45.7 oz/yd ²
Effective pile mass	ISO 8543	1333 g/m ² 39.2 oz/yd ²
Pile density	ISO 8543	0.134 g/cm ³ 0.0049 lb/in ³
Number of tufts	ISO 1763	615 /dm ² 51654 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:


Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002




Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001



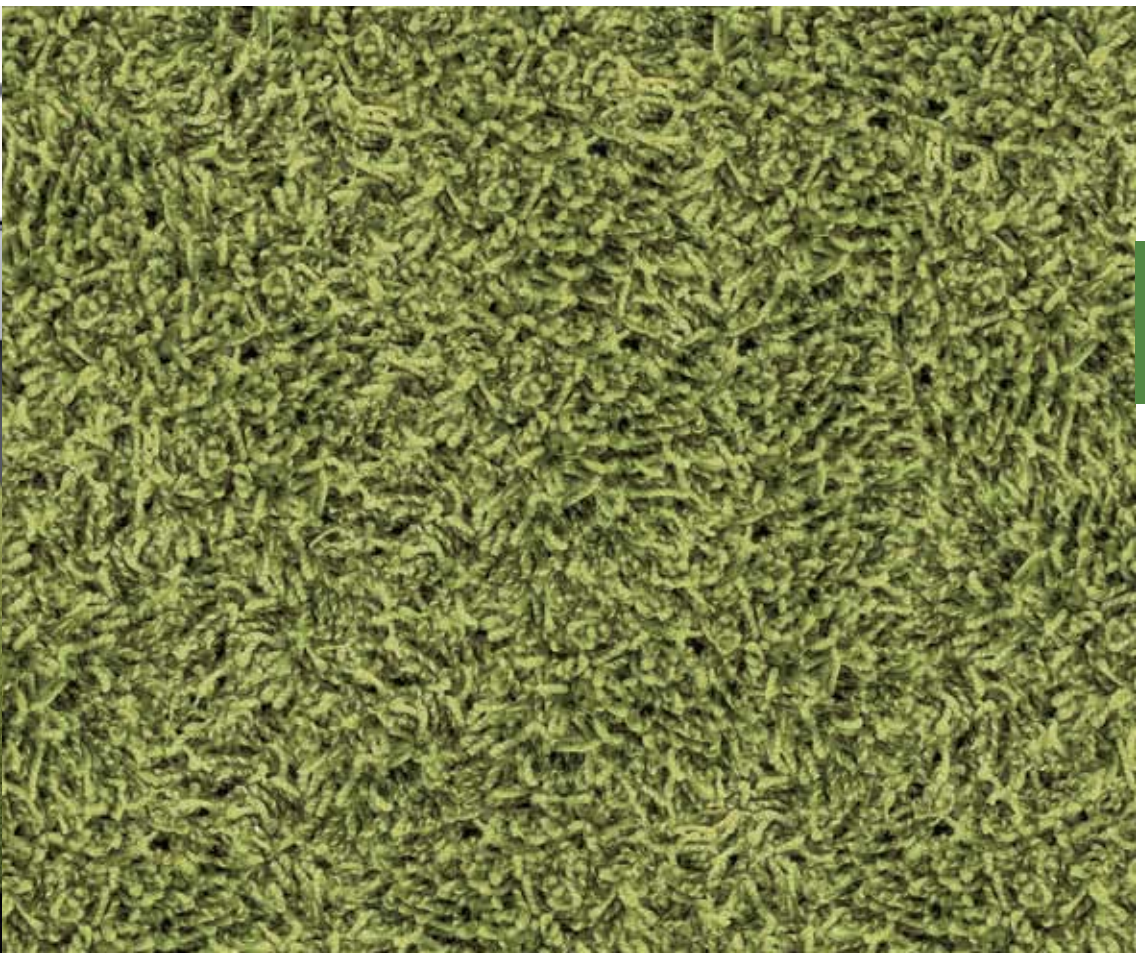

Bring the comfort feeling of home into an office or other commercial environment with the Twist carpet tile. Its high, shaggy cut pile structure and playful appearance brings luxury and richness into conference rooms, break-out areas or open office plans; either in full width or as rug effect installations. Various atmospheres can be created with the different colours in the collection, ranging from warm neutrals to bold accent colours such as green, red, orange and aqua blue.

											
Colour: 2953 L 28,91 LRV 5,80	Colour: 9113 L 30,97 LRV 6,64	Colour: 9990 L 16,24 LRV 2,15	Colour: 8812 L 30,26 LRV 6,34	Colour: 7573 L 43,10 LRV 13,22	Colour: 7018 L 50,58 LRV 18,91	Colour: 1660 L 52,50 LRV 20,59	Colour: 1958 L 47,60 LRV 16,48	Colour: 5401 L 38,57 LRV 10,41	Colour: 5001 L 34,87 LRV 8,43	Colour: 4211 L 21,32 LRV 3,33	Colour: 9950 L 48,77 LRV 17,41

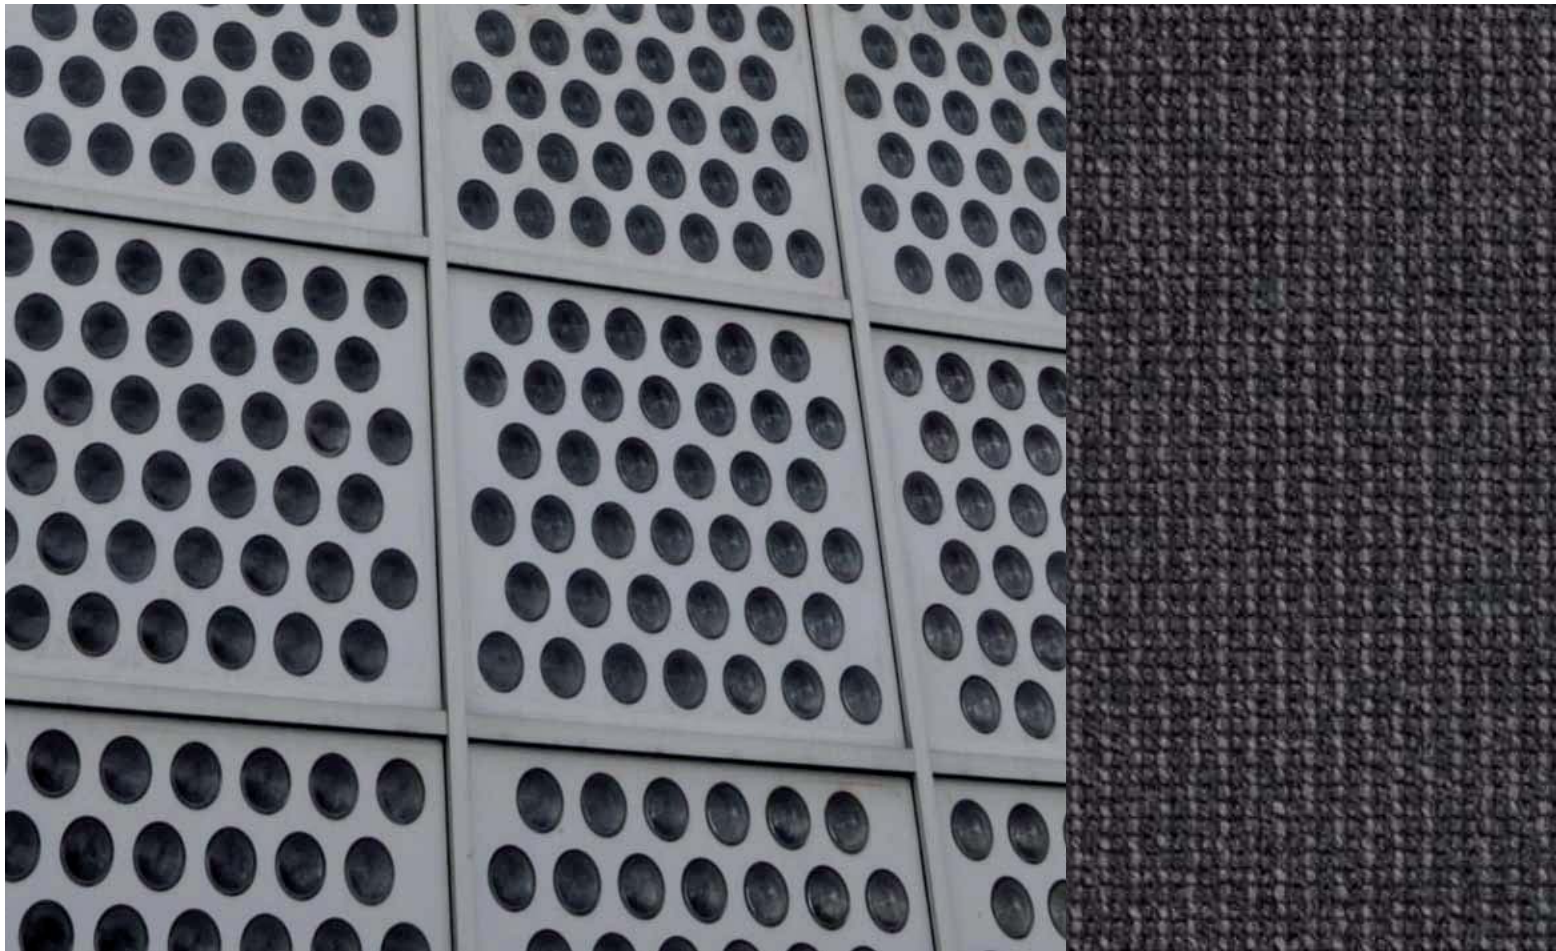

VERSO

Specification according to EN 15114

Type of manufacture	ISO 2424	Tufted 1/10" Compactuft loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® Polyscan®
Total thickness	ISO 1765	6.0 mm 0.24 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	500 g/m ² 14.8 oz/yd ²
Number of tufts	ISO 1763	1380 /dm ² 115382 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1 x 10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk







EN 14041
0493-CPD-0002






9501

Verso combines contemporary, minimalistic design with a distinct industrial influence. With its extremely tight and strong Compactuft construction, Verso creates the perfect balance between understated design and functional advantages of textile carpet. Colour inspiration is drawn from robust elements such as concrete, steel and stone to enhance the industrial look of the product.

					
Colour: 9501 L 28,00 LRV 5,46	Colour: 9980 L 30,53 LRV 6,45	Colour: 9975 L 35,14 LRV 8,57	Colour: 2912 L 33,94 LRV 7,98	Colour: 9504 L 42,16 LRV 12,60	Colour: 2914 L 40,18 LRV 11,36

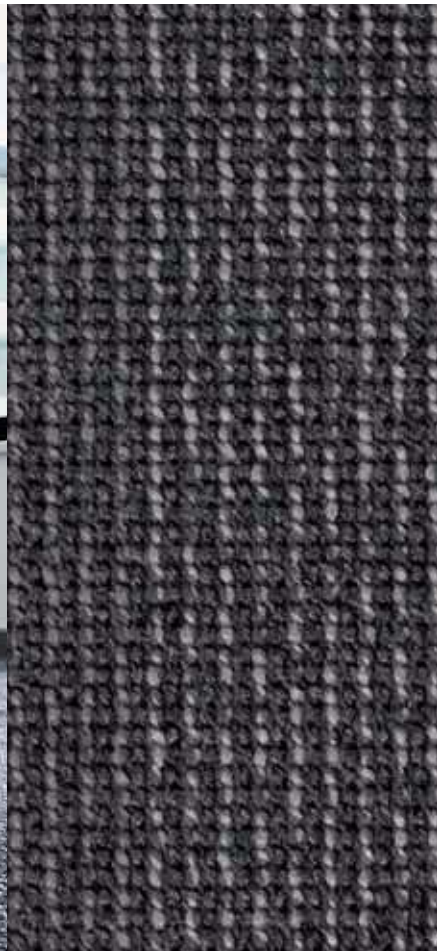

9502

VERSO BARS

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Compactuft loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® Polyscan®
Total thickness	ISO 1765	6.0 mm 0.24 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	500 g/m ² 14.8 oz/yd ²
Number of tufts	ISO 1763	1380 /dm ² 115382 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1 x 10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





The broad-striped Verso Bars combines contemporary, minimalistic design with a distinct industrial influence. With its extremely tight and strong Compactuft construction, Verso Bars creates the perfect balance between modest design and functional advantages of textile carpet. Combinations with the regular Verso offer opportunities for distinctive interiors.




Colour: 9502
L 30,40
LRV 6,40



Colour: 9970
L 32,67
LRV 7,39



Colour: 2002
L 36,51
LRV 9,28

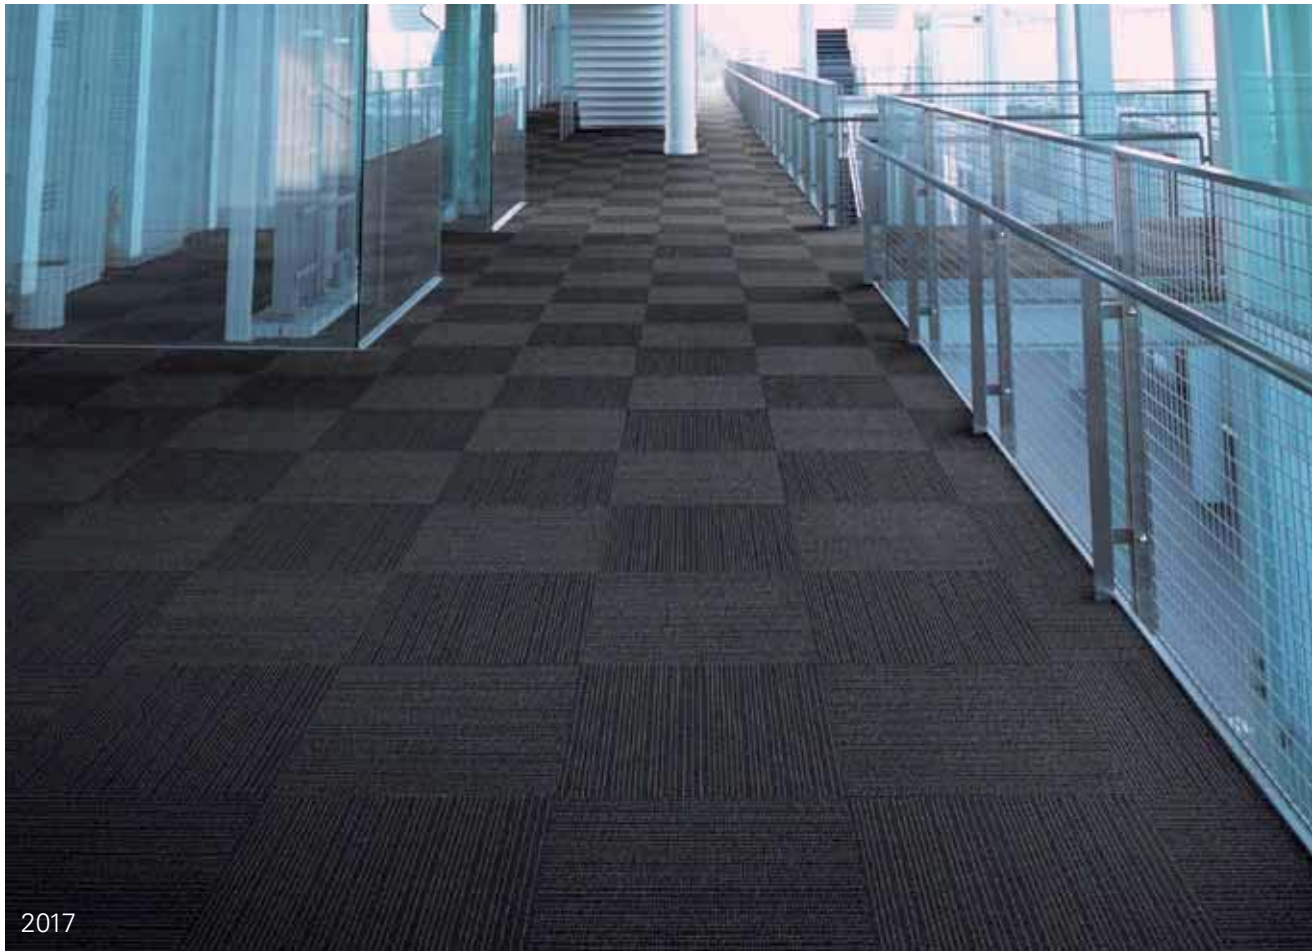

2017

VERSO GRID

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Compactuft loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6.6
Dimensions	EN 994	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Modified bitumen Polyver® Polyscan®
Total thickness	ISO 1765	6.0 mm 0.24 inch
Total mass	ISO 8543	4250 g/m ² 125.4 oz/yd ²
Total pile mass	ISO 2424	500 g/m ² 14.8 oz/yd ²
Number of tufts	ISO 1763	1380 /dm ² 115382 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1 x 10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Dimensional stability	EN 986	≤ 0.2 %
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso BV
PO Box 169
NL - 5140 AD Waalwijk

EN 14041
0493-CPD-0002



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001





The elegantly lined Verso Grid combines contemporary, minimalistic design with a distinct industrial influence. With its extremely tight and strong Compactuft construction, Verso Grid creates the perfect balance between modest design and functional advantages of textile carpet.



Colour: 2922
L 26,16
LRV 4,80



Colour: 9534
L 27,14
LRV 5,14



Colour: 2017
L 26,51
LRV 4,92



Colour: 8802
L 27,48
LRV 5,26



9536/9990

ALUMINA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.9 mm 0.31 inch
Effective pile thickness	ISO 1766	5.6 mm 0.23 inch
Total mass	ISO 8543	2350 g/m ² 69.3 oz/yd ²
Total pile mass	ISO 2424	930 g/m ² 27.4 oz/yd ²
Effective pile mass	ISO 8543	690 g/m ² 20.4 oz/yd ²
Pile density	ISO 8543	0.123 g/cm ³ 0.0044 lb/in ³
Number of tufts	ISO 1763	1950 /dm ² 162500 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

CE
EN 14041

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





With a lustrous shine and voluminous twisted loops, Alumina offers playful chic for modern, elegant interiors. This broadloom carpet comes in 12 striking colours, all based on the glossy metallic elements found in car, jewellery and audiovisual equipment design. Alumina colours can easily be combined with other interior elements such as furniture fabrics, steel and wood for holistic interior concepts.

Colour: 9990 L 16,72 LRV 2,25	Colour: 8801 L 20,94 LRV 3,23	Colour: 9501 L 23,80 LRV 4,05	Colour: 8813 L 36,42 LRV 9,24	Colour: 2914 L 50,23 LRV 18,62	Colour: 2035 L 49,74 LRV 18,23	Colour: 2056 L 43,62 LRV 13,59	Colour: 2933 L 39,90 LRV 11,19	Colour: 9536 L 57,23 LRV 25,18	Colour: 9945 L 51,31 LRV 19,55	Colour: 9970 L 40,42 LRV 11,51	Colour: 9532 L 32,33 LRV 7,23



290

ARCADE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8" Cut pile
Pile fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
With	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich backing
Total thickness	ISO 1765	10.0 mm
Effective pile thickness	ISO 1766	6.6 mm 0.39 inch
Total mass	ISO 8543	2800 g/m ² 0.26 inch
Total pile mass	ISO 2424	1380 g/m ² 82.6 oz/yd ²
Effective pile mass	ISO 8543	1065 g/m ² 40.7 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 31.4 oz/yd ²
Number of tufts	ISO 1763	1130 /dm ² 0.0058 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 94479 /yd ²
Use classification	EN 1307	32 Commercial - General use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle





242

Arcade is the perfect example of rich and luxurious carpeting. The high cut pile structure offers comfort, warmth and softness, without compromising on quality and durability. This appearance is enhanced by stylish colours with an elegant mix of tones, ranging from contemporary shades of grey to more classical colours.

											
Colour: 237 L 19,20 LRV 2,80	Colour: 292 L 29,86 LRV 6,21	Colour: 227 L 26,20 LRV 4,81	Colour: 223 L 33,69 LRV 7,89	Colour: 263 L 35,26 LRV 8,66	Colour: 212 L 24,43 LRV 4,24	Colour: 218 L 27,30 LRV 5,24	Colour: 239 L 33,24 LRV 7,66	Colour: 273 L 53,58 LRV 21,60	Colour: 242 L 40,43 LRV 11,53	Colour: 266 L 33,75 LRV 7,89	Colour: 243 L 27,65 LRV 5,35
											
Colour: 291 L 25,87 LRV 4,71	Colour: 255 L 15,40 LRV 1,99	Colour: 290 L 44,08 LRV 13,91									



ASTERANNE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm - 500 cm / 13' 1.5" - 16' 5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven
Total thickness	ISO 1765	9.5 mm 0.37 inch
Effective pile thickness	ISO 1766	7.2 mm 0.28 inch
Total mass	ISO 8543	2450 g/m ² 72.3 oz/yd ²
Total pile mass	ISO 2424	1170 g/m ² 34.5 oz/yd ²
Effective pile mass	ISO 8543	910 g/m ² 26.9 oz/yd ²
Pile density	ISO 8543	0.125 g/cm ³ 0.0045 lb/in ³
Number of tufts	ISO 1763	1850 /dm ² 154679 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	B _{fl} - s1



Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle






4201



Asteranne is a beautiful saxony product with a very rich look. The colour range is composed of deep and radiant colours. This broadloom carpet can be widely applied, and is suitable for all rooms in an interior, from stairs to studies, from hallway to boardroom.

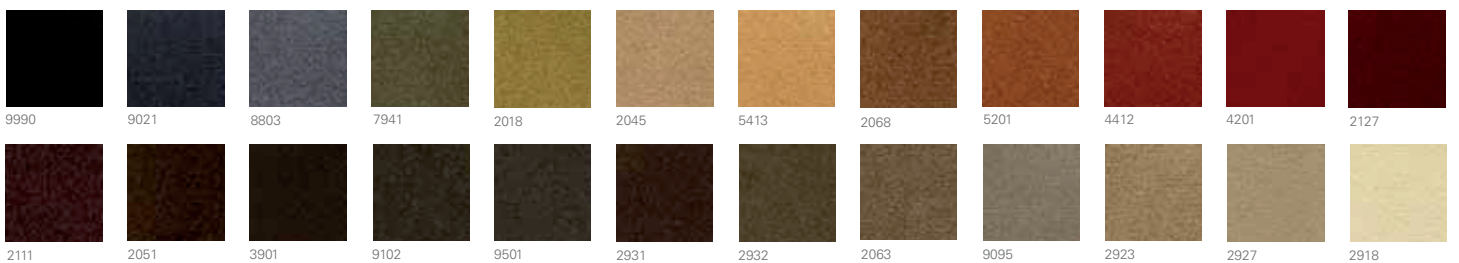



ATELIER

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.6 mm 0.26 inch
Effective pile thickness	ISO 1766	3.7 mm 0.15 inch
Total mass	ISO 8543	2345 g/m ² 69.2 oz/yd ²
Total pile mass	ISO 2424	880 g/m ² 26.0 oz/yd ²
Effective pile mass	ISO 8543	590 g/m ² 17.4 oz/yd ²
Pile density	ISO 8543	0.158 g/cm ³ 0.0057 lb/in ³
Number of tufts	ISO 1763	780 /dm ² 65216 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	B _{fl} - s1



Manufactured by:
 Desso
 Parallelweg 14
 NL - 5051HG Goirle





This structured loop pile has an interesting and unique pattern, giving Atelier a natural look that resembles a desert, its hills shaped by the wind. Atelier gives an industrial touch to any interior and with its strength and durability (class 33) it is very well suited for architectonic business projects.



154



132



170



172



176



177



148



158



164



191



196



CHANELLE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/16" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	16.0 mm 0.62 inch
Effective pile thickness	ISO 1766	13.0 mm 0.50 inch
Total mass	ISO 8543	3550 g/m ² 104.7 oz/yd ²
Total pile mass	ISO 2424	2050 g/m ² 60.5 oz/yd ²
Effective pile mass	ISO 8543	1800 g/m ² 53.1 oz/yd ²
Pile density	ISO 8543	0.138 g/cm ³ 0.0050 lb/in ³
Number of tufts	ISO 1763	252 /dm ² 21000 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	B _{fl} - s1




Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001



This is high pile luxury. The playful combination of two yarn types, one thick, one thin, creates a quality that is both delicate and voluminous. The natural look of Chanelle is enhanced by the colourline, which consists of a number of natural shades. With this versatile colourline, Chanelle is an excellent choice for both modern and classical interiors.

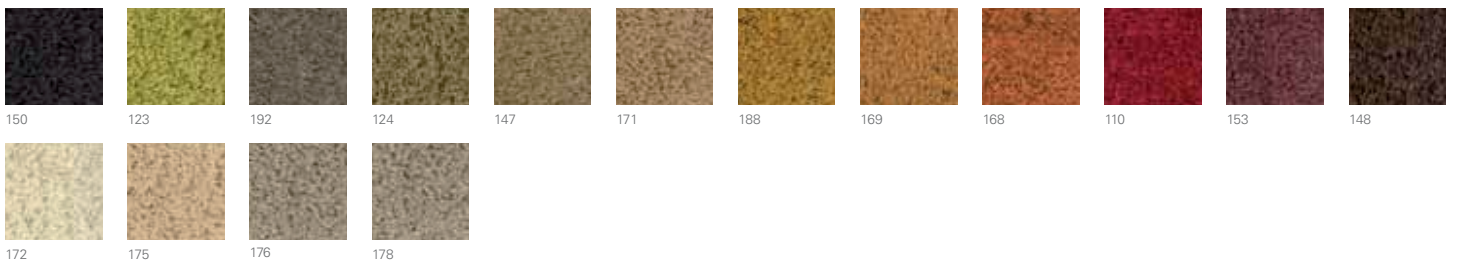



CHINCHILLA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/16" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	11.5 mm 0.45 inch
Effective pile thickness	ISO 1766	8.4 mm 0.33 inch
Total mass	ISO 8543	2600 g/m ² 76.7 oz/yd ²
Total pile mass	ISO 2424	1265 g/m ² 37.3 oz/yd ²
Effective pile mass	ISO 8543	1155 g/m ² 34.1 oz/yd ²
Pile density	ISO 8543	0.138 g/cm ³ 0.0050 lb/in ³
Number of tufts	ISO 1763	265 /dm ² 22157 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	C _{fl} - s1



EN 14041

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle
















Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001

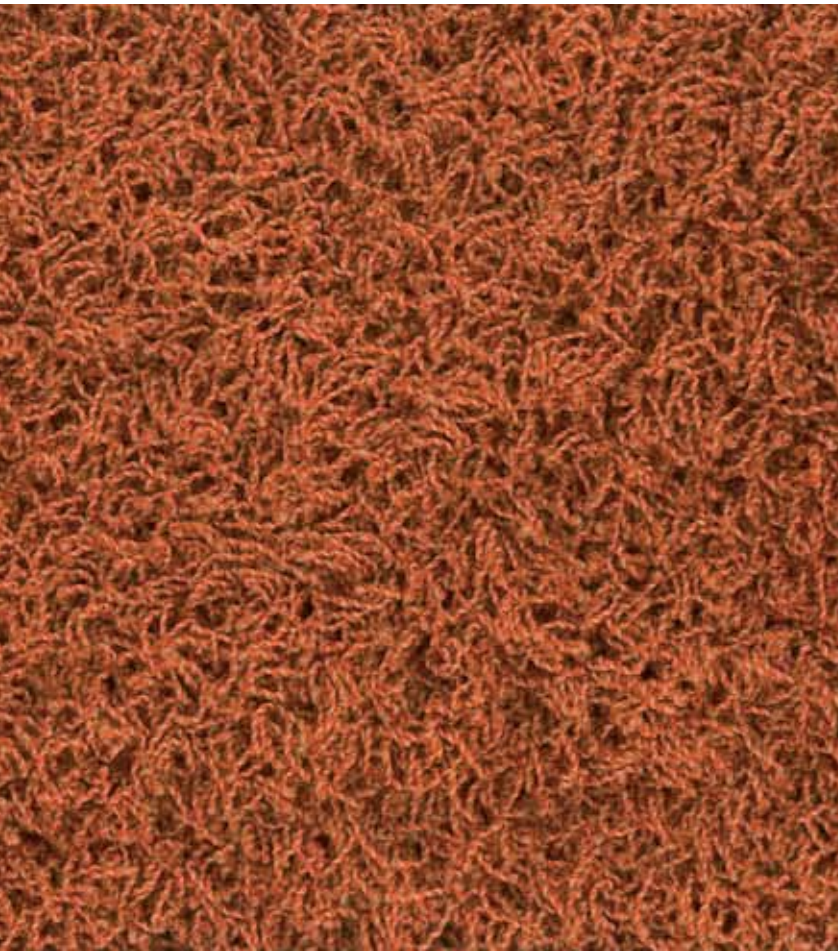

In the residential segment, this high cut pile is an all-time favourite, characterized by a nonchalant, shaggy look. The combination of a trendy two-tone (ton sur ton) colour line with vibrant shades and a luxurious, shiny look makes Chinchilla unique on the market.

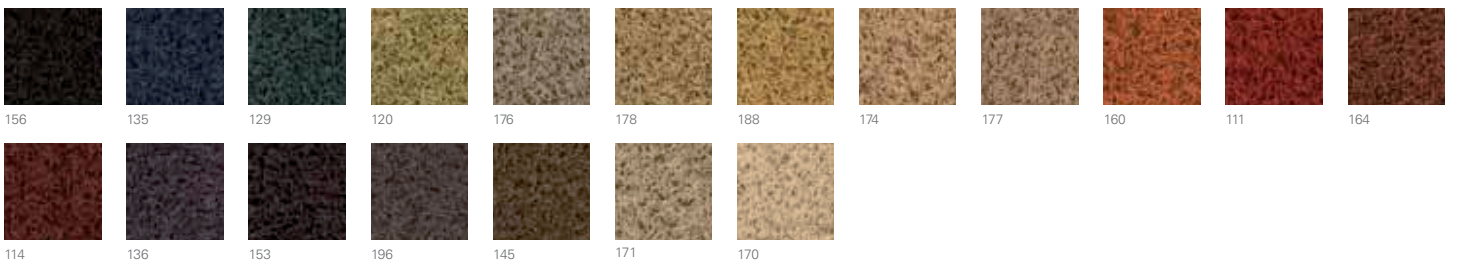

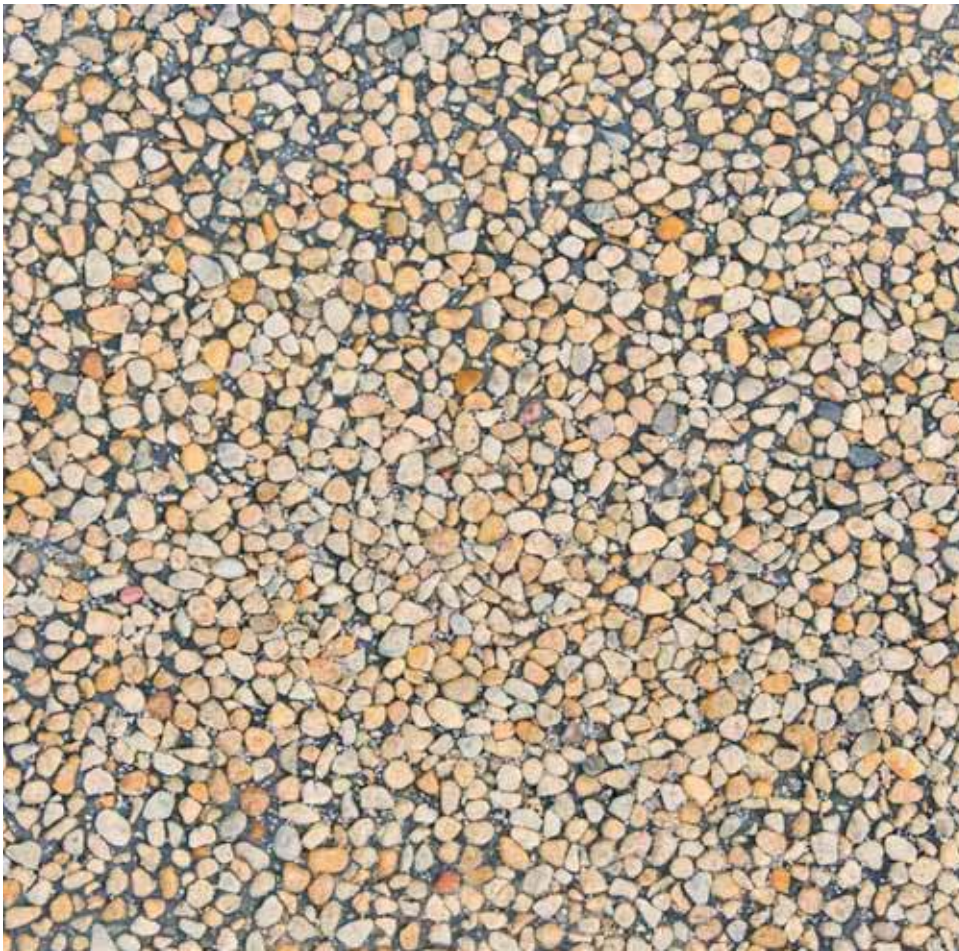

CITY

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich backing
Total thickness	ISO 1765	5.2 mm 0.20 inch
Effective pile thickness	ISO 1766	2.8 mm 0.11 inch
Total mass	ISO 8543	1765 g/m ² 52.1 oz/yd ²
Total pile mass	ISO 2424	520 g/m ² 15.3 oz/yd ²
Effective pile mass	ISO 8543	330 g/m ² 09.7 oz/yd ²
Pile density	ISO 8543	0.117 g/cm ³ 0.0042 lb/in ³
Number of tufts	ISO 1763	1650 /dm ² 137957 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
336-CPD-8470

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





Available in both carpet tiles and broadloom, City offers a multitude of creative possibilities and great value for money. Its dense low level loop pile makes it a hardwearing carpet for any commercial application. The colour line of 12 colours ranges from commercial greys and blues to warm natural shades with some brighter accent colours.

											
Colour: 9021 L 18,68 LRV 2,67	Colour: 8811 L 17,61 LRV 2,43	Colour: 8432 L 32,14 LRV 7,15	Colour: 8173 L 36,37 LRV 9,20	Colour: 9514 L 57,03 LRV 24,95	Colour: 9503 L 41,37 LRV 12,10	Colour: 2922 L 46,63 LRV 15,74	Colour: 2034 L 54,05 LRV 22,02	Colour: 2116 L 31,43 LRV 6,83	Colour: 4211 L 23,86 LRV 4,06	Colour: 9532 L 31,65 LRV 6,93	Colour: 9001 L 18,34 LRV 2,59



CONTESSA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	9.0 mm 0.35 inch
Effective pile thickness	ISO 1766	6.2 mm 0.24 inch
Total mass	ISO 8543	2500 g/m ² 73.8 oz/yd ²
Total pile mass	ISO 2424	1455 g/m ² 42.9 oz/yd ²
Effective pile mass	ISO 8543	1085 g/m ² 32.0 oz/yd ²
Pile density	ISO 8543	0.175 g/cm ³ 0.0063 lb/in ³
Number of tufts	ISO 1763	655 /dm ² 54765 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	B _{fl} - s1

 EN 14041


Manufactured by:
 Desso
 Parallelweg 14
 NL - 5051HG Goirle


        

23336

Quality- and Environmental Management System Certification ISO 9001 & ISO 14001

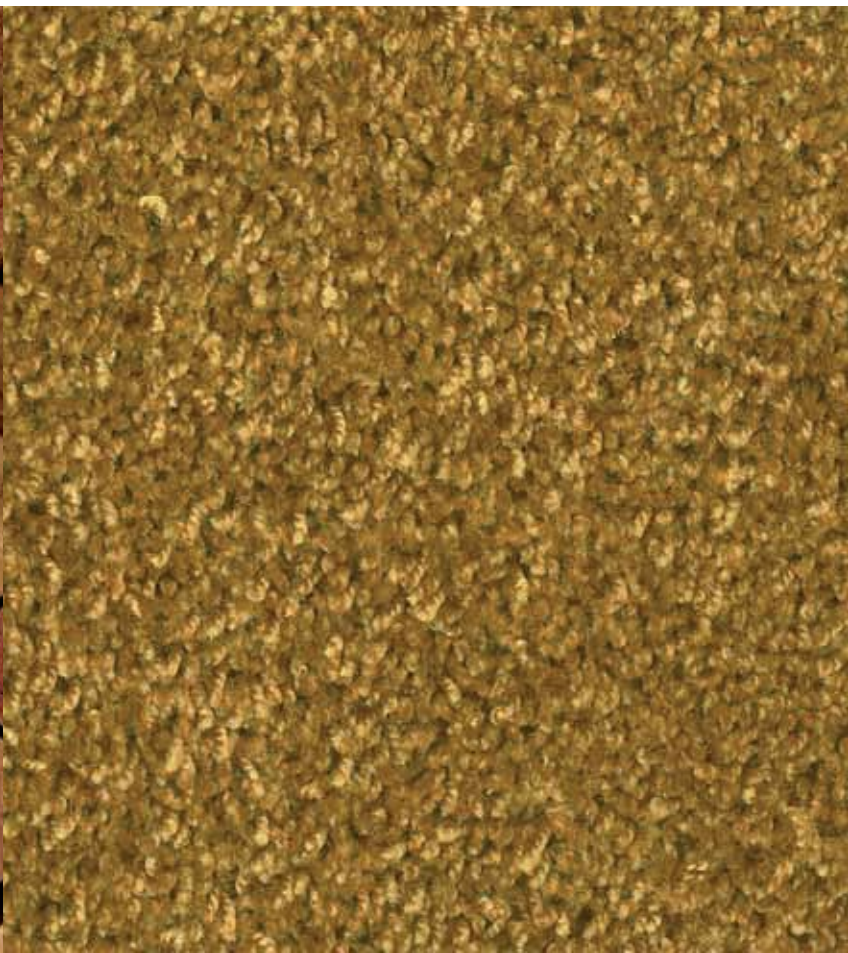

Contessa embodies luxury. Its shiny and extremely soft yarn invites you to touch and feel the richness of this carpet. The colour range consists of deep, rich colours that will illuminate every room and create a perfect atmosphere of quality, style and distinction.

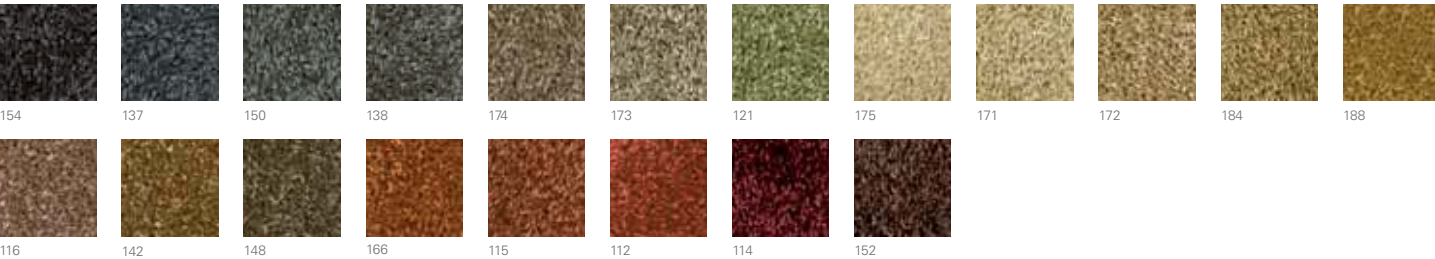



ELEGANCE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8" Cut pile
Pile Fibre composition	ISO 2424	Print BFC Polyamide 6
Dimensions	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene fleece
Secondary backing	ISO 2424	Polypropylene woven
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	5.0 mm 0.20 inch
Total mass	ISO 8543	2250 g/m ² 66.4 oz/yd ²
Total pile mass	ISO 2424	900 g/m ² 26.6 oz/yd ²
Effective pile mass	ISO 8543	680 g/m ² 20.1 oz/yd ²
Pile density	ISO 8543	0.135 g/cm ³ 0.0049 lb/in ³
Number of tufts	ISO 1763	1450 /dm ² 121235 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1




Supplied by:
Desso
Parallelweg 14
NL - 5051HG Goirle





9980-204

From classic to modern, bold to subtle, Elegance broadloom carpet can create any mood. Elegance creates a feeling of well-being and luxury and is ideal for all areas of, for instance, a hotel, from entrance lobbies to guest bedrooms, or for other commercial applications where style and luxury is desired. This cut pile broadloom carpet is offered in various stylish designs and a wide variety of colours.

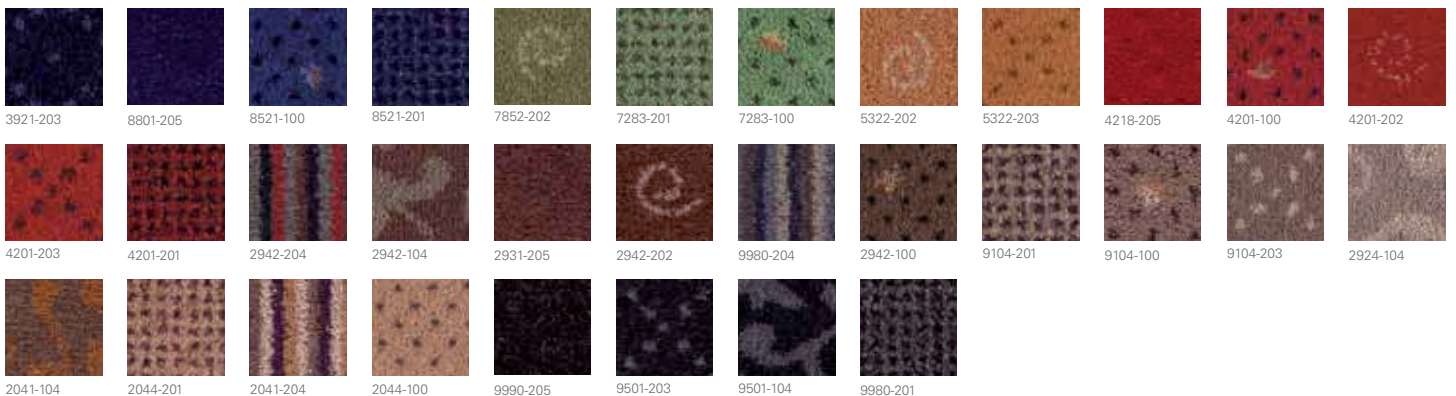



9021

ESSENCE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich backing
Total thickness	ISO 1765	5.0 mm 0.20 inch
Effective pile thickness	ISO 1766	2.3 mm 0.09 inch
Total mass	ISO 8543	1750 g/m ² 51.7 oz/yd ²
Total pile mass	ISO 2424	550 g/m ² 16.2 oz/yd ²
Effective pile mass	ISO 8543	300 g/m ² 08.9 oz/yd ²
Pile density	ISO 8543	0.132 g/cm ³ 0.0048 lb/in ³
Number of tufts	ISO 1763	1580 /dm ² 132104 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




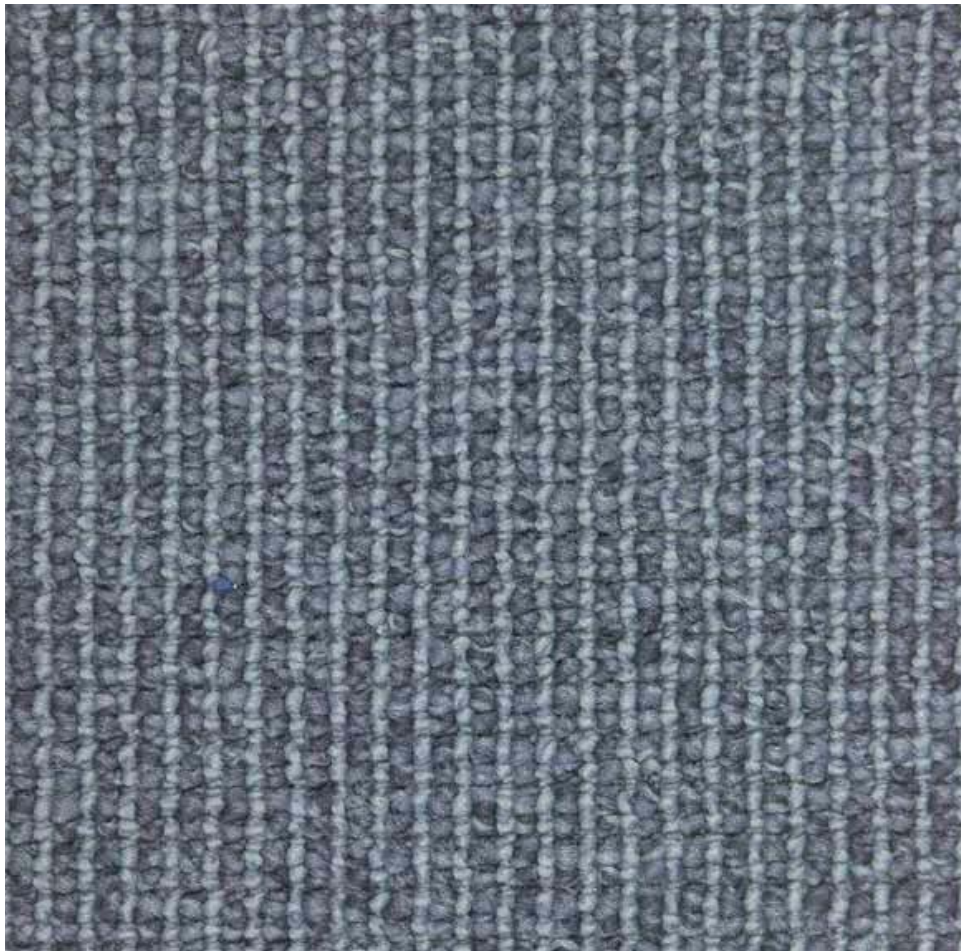
Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle





This carpet product stands for quality at an affordable price. With its level loop pile structure, a colour range of strong, commercial colours and good, hardwearing quality, this product embodies the pure essence of a flooring product. Essence is available in both carpet tiles and broadloom (in 12 and 6 colours respectively) for endless freedom in flooring design.

					
Colour: 3841 L 22,57 LRV 3,68	Colour: 8521 L 24,75 LRV 4,34	Colour: 9094 L 38,22 LRV 10,21	Colour: 2921 L 25,72 LRV 4,65	Colour: 9501 L 24,04 LRV 4,11	Colour: 9503 L 40,00 LRV 11,25



192

EXCEL

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	4.3 mm 0.17 inch
Total mass	ISO 8543	2100 g/m ² 62.0 oz/yd ²
Total pile mass	ISO 2424	725 g/m ² 21.4 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 13.9 oz/yd ²
Pile density	ISO 8543	0.109 g/cm ³ 0.0039 lb/in ³
Number of tufts	ISO 1763	1050 /dm ² 87791 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle





Excel offers comfort and a homey atmosphere with its rich structure and warm colours. The pattern of high-low ribs and tonal colour contrasts creates a natural appearance that can contribute to the identity of any commercial environment. The colour line ranges from commercial blues and greys to warmer accent colours in red, orange and purple.

											
Colour: 150 L 17,35 LRV 2,38	Colour: 130 L 21,36 LRV 3,34	Colour: 131 L 31,32 LRV 6,79	Colour: 132 L 41,83 LRV 12,39	Colour: 120 L 25,06 LRV 4,44	Colour: 121 L 48,54 LRV 17,23	Colour: 180 L 47,88 LRV 16,70	Colour: 160 L 30,27 LRV 6,35	Colour: 110 L 23,33 LRV 3,90	Colour: 111 L 19,80 LRV 2,94	Colour: 113 L 20,89 LRV 3,22	Colour: 151 L 25,58 LRV 4,61
											
Colour: 190 L 40,35 LRV 11,47	Colour: 192 L 38,11 LRV 10,15	Colour: 191 L 54,77 LRV 22,71									



4411

FLUX

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich backing
Total thickness	ISO 1765	6.0 mm
Effective pile thickness	ISO 1766	3.3 mm 0.24 inch
Total mass	ISO 8543	2200 g/m ² 0.13 inch
Total pile mass	ISO 2424	725 g/m ² 64.9 oz/yd ²
Effective pile mass	ISO 8543	480 g/m ² 21.4 oz/yd ²
Pile density	ISO 8543	0.146 g/cm ³ 14.8 oz/yd ²
Number of tufts	ISO 1763	2100 /dm ² 0.0056 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 175581 /yd ²
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





Flux has a clean and elegant appearance. The unity of both a matt and a shiny yarn enhances the textile character of the carpet, to create strong links with other fabrics used in interior elements. The combination of yarns in a linear pattern also adds a lively character and depth to the product, intensified by the influence of light in the design.

											
Colour: 8811 L 15,71 LRV 2,04	Colour: 8521 L 25,77 LRV 4,67	Colour: 2025 L 45,51 LRV 14,91	Colour: 7117 L 48,44 LRV 17,14	Colour: 6303 L 59,67 LRV 27,76	Colour: 4411 L 33,06 LRV 7,56	Colour: 4311 L 23,80 LRV 4,04	Colour: 3411 L 16,45 LRV 2,19	Colour: 2914 L 42,89 LRV 13,08	Colour: 9104 L 35,43 LRV 8,72	Colour: 2922 L 28,16 LRV 5,52	Colour: 2941 L 22,00 LRV 3,52
											
Colour: 9975 L 23,85 LRV 4,05	Colour: 2121 L 18,77 LRV 2,69	Colour: 9512 L 20,51 LRV 3,12	Colour: 9965 L 33,38 LRV 7,71	Colour: 9504 L 33,99 LRV 8,00	Colour: 9095 L 42,81 LRV 13,03						



299

FORUM®

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.0 mm 0.42 inch
Effective pile thickness	ISO 1766	3.4 mm 0.13 inch
Total mass	ISO 8543	2100 g/m ² 62.0 oz/yd ²
Total pile mass	ISO 2424	740 g/m ² 21.8 oz/yd ²
Effective pile mass	ISO 8543	460 g/m ² 13.6 oz/yd ²
Pile density	ISO 8543	0.135 g/cm ³ 0.0049 lb/in ³
Number of tufts	ISO 1763	1640 /dm ² 137120 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour
















Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001



Drawing its inspiration from earthy fibres, Forum harnesses the beauty of nature through its rugged texture. The colour line of this broadloom carpet also expresses this natural inspiration with warm browns and beiges, deep reds and oranges, stony greys and icy blues. A contrasting dark thread in every colour brings depth and creates a subtle linear accent.

											
Colour: 250 L 24,66 LRV 4,31	Colour: 230 L 24,30 LRV 4,19	Colour: 235 L 34,79 LRV 8,40	Colour: 237 L 36,95 LRV 9,51	Colour: 225 L 26,03 LRV 4,75	Colour: 255 L 34,89 LRV 8,44	Colour: 290 L 46,01 LRV 15,28	Colour: 299 L 46,95 LRV 15,98	Colour: 275 L 40,25 LRV 11,40	Colour: 276 L 44,06 LRV 13,88	Colour: 214 L 33,09 LRV 7,58	Colour: 210 L 27,29 LRV 5,20
											
Colour: 246 L 35,70 LRV 8,85											



2941

GRAVEL LINE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.3 mm
Effective pile thickness	ISO 1766	3.2 mm 0.25 inch
Total mass	ISO 8543	2270 g/m ² 0.13 inch
Total pile mass	ISO 2424	875 g/m ² 67.0 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 25.8 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 15.1 oz/yd ²
Number of tufts	ISO 1763	1865 /dm ² 0.0058 lb/in ²
Stroll test	ISO 6356	≤ 2.0 kV 155933 /yd ²
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




EN 14041
336-CPD-8470

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle



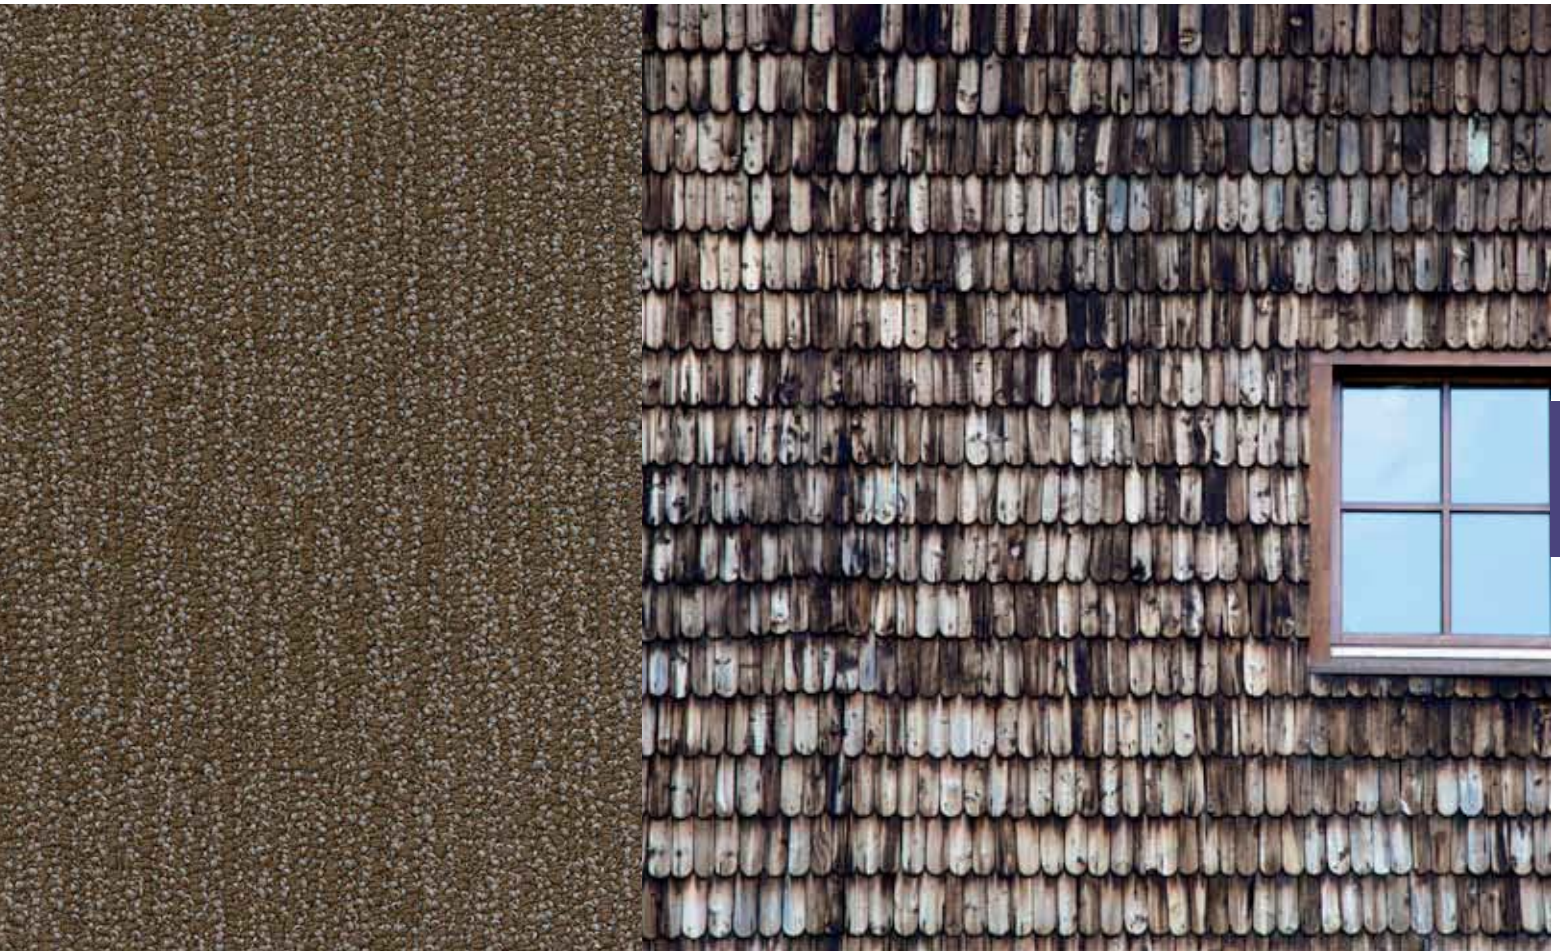

Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. Gravel Line features an organically ribbed structure combined with hints of geometry. This irregular structure works synergistically with the naturally inspired colour line of beige, brown and mineral tones. The subtle multi-colour effect further enhances the tactile appearance of this carpet. Some of the 8 colours can be combined with the other designs, Gravel Motive and Gravel Structure, for creative flooring designs.

							
Colour: 9990 L 17,83 LRV 2,48	Colour: 8901 L 18,27 LRV 2,58	Colour: 8331 L 28,86 LRV 5,79	Colour: 9975 L 39,59 LRV 11,00	Colour: 4218 L 29,16 LRV 5,90	Colour: 2941 L 26,00 LRV 4,75	Colour: 2042 L 40,03 LRV 11,27	Colour: 2043 L 45,95 LRV 15,23



2121

GRAVEL MOTIVE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.3 mm
Effective pile thickness	ISO 1766	3.2 mm 0.25 inch
Total mass	ISO 8543	2270 g/m ² 0.13 inch
Total pile mass	ISO 2424	875 g/m ² 67.0 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 25.8 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 15.1 oz/yd ²
Number of tufts	ISO 1763	1865 /dm ² 0.0058 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 155933 /yd ²
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
336-CPD-8470

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle




Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001
23348



Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. With its graphical pattern of randomly placed blocks of different shapes and sizes, Gravel Motive is ideal for commercial environments. The dynamic nature of the design is further enhanced by the palette of 6 corporate colours with a subtle multi-colour effect, easily combined with the other Gravel designs.

					
Colour: 9990 L 16,73 LRV 2,25	Colour: 8901 L 20,19 LRV 3,04	Colour: 9975 L 41,41 LRV 8,20	Colour: 2924 L 45,93 LRV 15,22	Colour: 2078 L 34,39 LRV 8,20	Colour: 2121 L 20,46 LRV 3,10

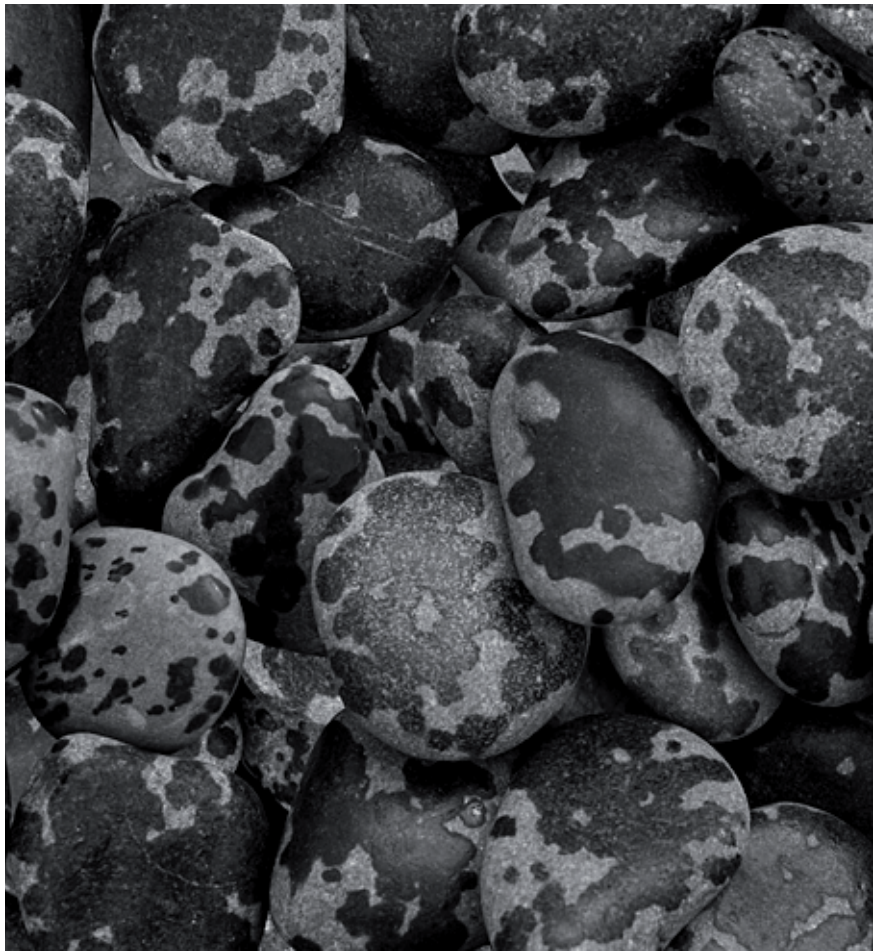

GRAVEL STRUCTURE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.3 mm
Effective pile thickness	ISO 1766	3.2 mm 0.25 inch
Total mass	ISO 8543	2270 g/m ² 0.13 inch
Total pile mass	ISO 2424	875 g/m ² 67.0 oz/yd ²
Effective pile mass	ISO 8543	510 g/m ² 25.8 oz/yd ²
Pile density	ISO 8543	0.162 g/cm ³ 15.1 oz/yd ²
Number of tufts	ISO 1763	1865 /dm ² 0.0058 lb/in ²
Stroll test	ISO 6356	≤ 2.0 kV 155933 /yd ²
Classification for use	EN 1307	33 Commercial - Heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
336-CPD-8470

Manufactured by:


Desso
Parallelweg 14
NL - 5051HG Goirle





Gravel is a contemporary range of three designs, available in both carpet tiles and broadloom. The organic pattern of irregular highs and lows embodies the natural effect of calm water flows. The neutral colour range reflects nature even more through cool greys and blues and warm beiges and reds. Most colours can be combined with the designs of Gravel Line or Gravel Motive to create distinctive, unique interiors.

					
Colour: 9990 L 18,58 LRV 2,65	Colour: 8901 L 20,40 LRV 3,09	Colour: 9975 L 39,31 LRV 10,85	Colour: 2042 L 38,24 LRV 10,23	Colour: 2078 L 34,39 LRV 8,20	Colour: 4201 L 25,42 LRV 4,55

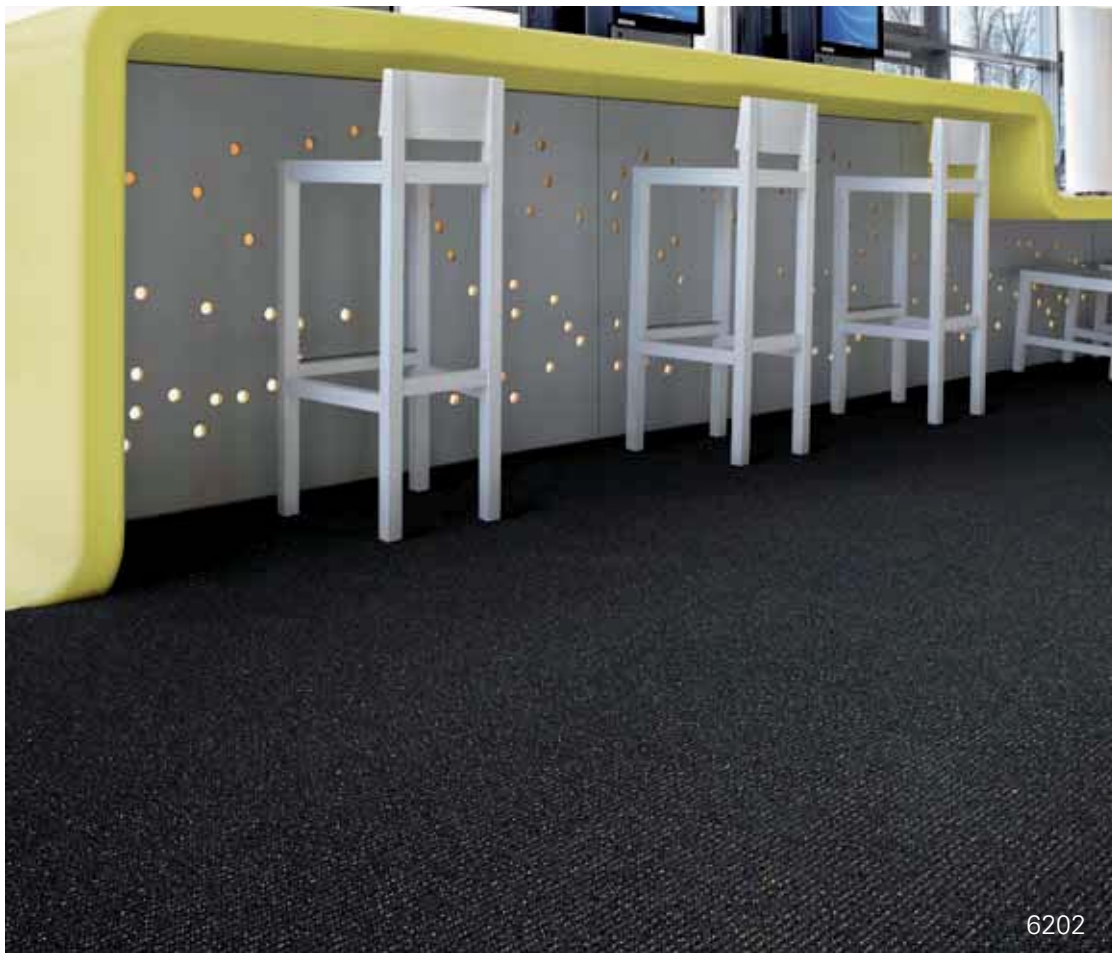

6202

HINT


Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile
Pile Fibre composition	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.0 mm 0.28 inch
Effective pile thickness	ISO 1766	4.1 mm 0.16 inch
Total mass	ISO 8543	2200 g/m ² 64.9 oz/yd ²
Total pile mass	ISO 2424	725 g/m ² 21.4 oz/yd ²
Effective pile mass	ISO 8543	480 g/m ² 14.2 oz/yd ²
Pile density	ISO 8543	0.117 g/cm ³ 0.0042 lb/in ³
Number of tufts	ISO 1763	1440 /dm ² 120398 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle



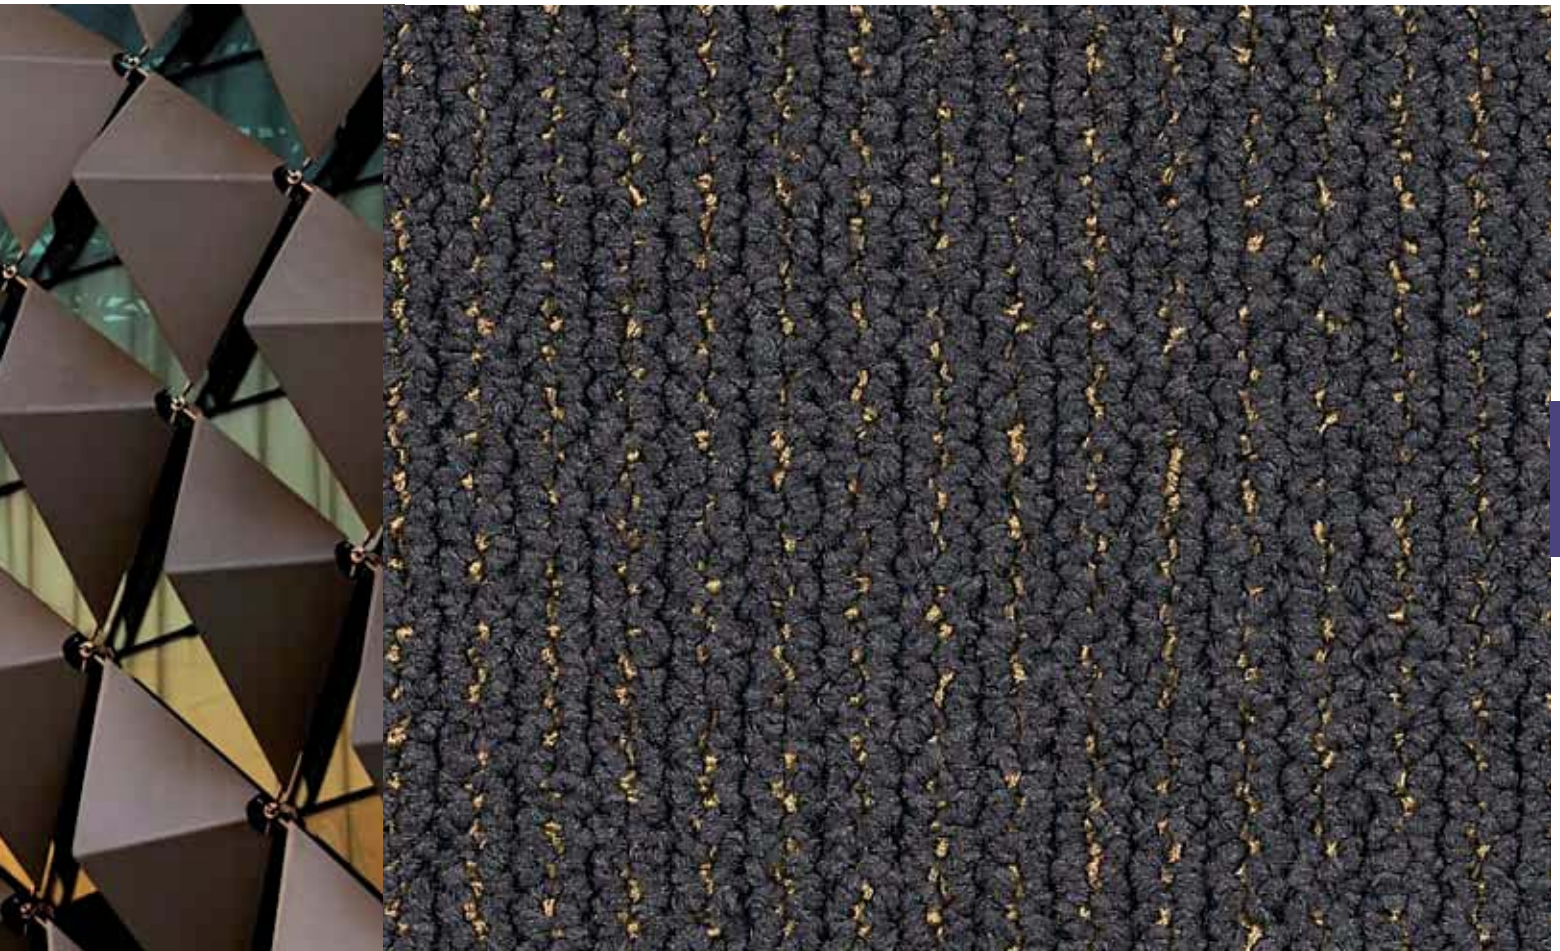

The elegantly ribbed high low structure of Hint offers comfort and richness in stylish dark colours. Lines in playful, bold accent colours create a subtle linear effect. The combination of these colourful lines against a dark background, reinforced by the contrast between the matt and lustrous yarns, creates an exciting two layer effect. The accent colour appears close to where a person is standing, but fades away further into the distance.

							
Colour: 8302 L 20,10 LRV 3,01	Colour: 6207 L 20,35 LRV 3,08	Colour: 4307 L 18,63 LRV 2,66	Colour: 4017 L 20,18 LRV 3,03	Colour: 2924 L 25,90 LRV 4,71	Colour: 6202 L 25,54 LRV 4,59	Colour: 7258 L 26,19 LRV 4,81	Colour: 1056 L 27,05 LRV 5,11



2935

INOVA TWIN

Specification according to EN 1307


Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm - 500 cm / 13' 1.5" - 16' 5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	11.5 mm 0.45 inch
Effective pile thickness	ISO 1766	9.2 mm 0.36 inch
Total mass	ISO 8543	2700 g/m ² 79.7 oz/yd ²
Total pile mass	ISO 2424	1400 g/m ² 41.3 oz/yd ²
Effective pile mass	ISO 8543	1165 g/m ² 34.4 oz/yd ²
Pile density	ISO 8543	0.125 g/cm ³ 0.0045 lb/in ³
Number of tufts	ISO 1763	1970 /dm ² 164712 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	32 Commercial - general use
Flammability	EN 13501-1	C _{fl} - s1



Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle



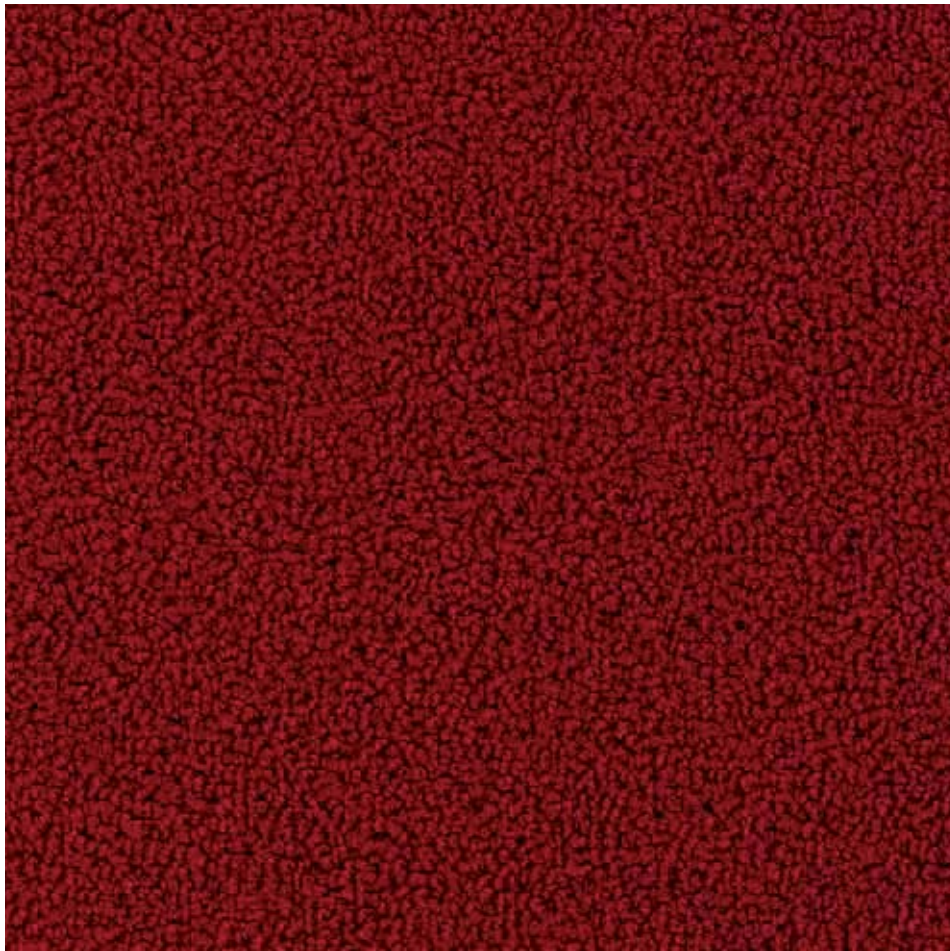

4218

MARATHON

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.5 mm 0.30 inch
Effective pile thickness	ISO 1766	5.0 mm 0.20 inch
Total mass	ISO 8543	2400 g/m ² 70.8 oz/yd ²
Total pile mass	ISO 2424	880 g/m ² 26.0 oz/yd ²
Effective pile mass	ISO 8543	660 g/m ² 19.5 oz/yd ²
Pile density	ISO 8543	0.130 g/cm ³ 0.0047 lb/in ³
Number of tufts	ISO 1763	1530 /dm ² 127923 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003





















Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





Marathon beautifully combines textured simplicity with lustrous chic. This loop pile broadloom carpet is uniquely designed for modern, dynamic office environments. Marathon's 20 fresh colours, ranging from timeless greys and blues to contemporary natural shades and bolder accent colours, give offices a lively, distinctive feel.

											
Colour: 9002 L 19,91 LRV 2,97	Colour: 9511 L 14,54 LRV 1,82	Colour: 9502 L 22,61 LRV 3,69	Colour: 8901 L 14,65 LRV 1,84	Colour: 8801 L 22,16 LRV 3,56	Colour: 8521 L 24,15 LRV 4,15	Colour: 8813 L 36,03 LRV 9,02	Colour: 7942 L 30,07 LRV 6,26	Colour: 6421 L 35,41 LRV 8,70	Colour: 9094 L 42,01 LRV 12,50	Colour: 2054 L 44,58 LRV 14,25	Colour: 1321 L 62,20 LRV 30,64
											
Colour: 5112 L 38,23 LRV 10,21	Colour: 4218 L 23,00 LRV 3,80	Colour: 9111 L 15,61 LRV 2,02	Colour: 2951 L 19,35 LRV 2,83	Colour: 2952 L 29,55 LRV 6,05	Colour: 9104 L 30,96 LRV 6,63	Colour: 9004 L 35,78 LRV 8,90	Colour: 9960 L 40,89 LRV 11,79				



2097

MILA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.0 mm
Effective pile thickness	ISO 1766	4.8 mm 0.28 inch
Total mass	ISO 8543	2050 g/m ² 0.19 inch
Total pile mass	ISO 2424	850 g/m ² 60.5 oz/yd ²
Effective pile mass	ISO 8543	700 g/m ² 25.1 oz/yd ²
Pile density	ISO 8543	0.145 g/cm ³ 20.7 oz/yd ³
Number of tufts	ISO 1763	1650 /dm ² 0.0052 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 137957 /yd ²
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





Mila comprises broadloom carpet and carpet tiles with both common and complementary colours in a densely tufted velour pile. This makes Mila ideal for all areas of a building from corridors to stairs, reception to boardroom. The depth and variety of colour encourages character such as timeless hues for classic elegance and bright accents for contemporary zones.



Colour: 9990
L 21,19
LRV 3,30



Colour: 8422
L 22,76
LRV 3,73



Colour: 2921
L 27,36
LRV 5,22



Colour: 9094
L 43,37
LRV 13,41



Colour: 9980
L 26,42
LRV 4,89



Colour: 9965
L 42,35
LRV 12,72



8406

PALATINO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.6 mm
Effective pile thickness	ISO 1766	4.8 mm 0.30 inch
Total mass	ISO 8543	2350 g/m ² 0.19 inch
Total pile mass	ISO 2424	850 g/m ² 69.32 oz/yd ²
Effective pile mass	ISO 8543	700 g/m ² 25.1 oz/yd ²
Pile density	ISO 8543	0.145 g/cm ³ 20.7 oz/yd ²
Number of tufts	ISO 1763	1650 /dm ² 0.0052 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 137957 /yd ²
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour


 EN 14041
 0493-CPD-0003













Manufactured by:
 Desso
 Parallelweg 14
 NL - 5051HG Goirle








This carpet, available in both broadloom and carpet tile, is characterized by its rich twisted cut pile construction and striking line of 12 broadloom colours. The dense structure of Palatino successfully combines a luxurious appearance with strength and durability. The wide range of versatile colours offers endless opportunities to define space and make a statement. With Palatino there are no limits for creating a distinct interior.

											
Colour: 9031 L 15,42 LRV 1,99	Colour: 3841 L 16,53 LRV 2,21	Colour: 7062 L 49,31 LRV 17,85	Colour: 4218 L 26,00 LRV 4,75	Colour: 9092 L 25,59 LRV 4,61	Colour: 2923 L 49,09 LRV 17,66	Colour: 1957 L 56,46 LRV 24,37	Colour: 9091 L 20,42 LRV 3,09	Colour: 9531 L 19,18 LRV 2,79	Colour: 9970 L 30,96 LRV 6,63	Colour: 9025 L 49,33 LRV 17,86	Colour: 9505 L 45,76 LRV 15,09



510

PALESSE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed Polyamide 6.6 spun yarn
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	9.3 mm 0.37 inch
Effective pile thickness	ISO 1766	7.2 mm 0.28 inch
Total mass	ISO 8543	2325 g/m ² 68.6 oz/yd ²
Total pile mass	ISO 2424	1135 g/m ² 33.5 oz/yd ²
Effective pile mass	ISO 8543	945 g/m ² 27.9 oz/yd ²
Pile density	ISO 8543	0.131 g/cm ³ 0.0047 lb/in ³
Number of tufts	ISO 1763	2120 /dm ² 177253 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	31 Commercial - moderate use
Flammability	EN 13501-1	C _{fl} - s1




Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle





This silky-soft high cut pile invites you to touch, feel and indulge. The modern colour line of 17 rich and deep colours, such as Ruby, Cayenne and Cassis, makes Palesse a great choice for a wide variety of interiors.

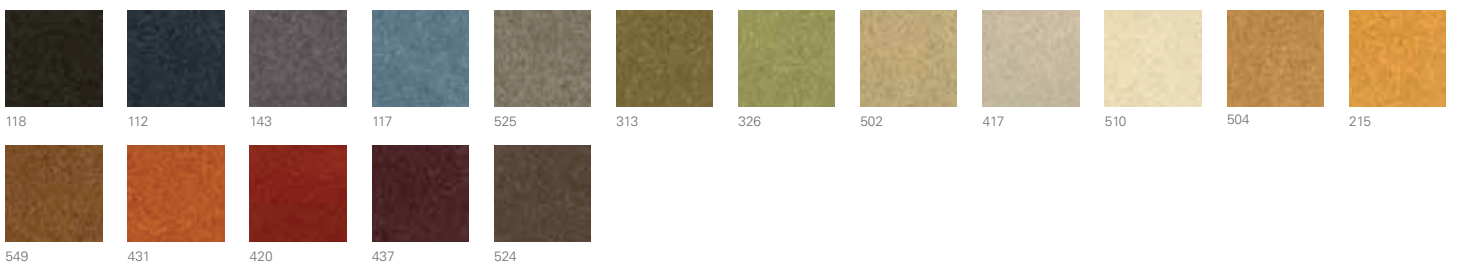



9516

PALLAS

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Width	CEN/TS 14159	400 / 13' 1.5"
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	7.5 mm
Effective pile thickness	ISO 1766	4.0 mm 0.30 inch
Total mass	ISO 8543	2050 g/m ² 0.16 inch
Total pile mass	ISO 2424	660 g/m ² 60.5 oz/yd ²
Effective pile mass	ISO 8543	430 g/m ² 19.5 oz/yd ²
Pile density	ISO 8543	0.108 g/cm ³ 12.7 oz/yd ²
Number of tufts	ISO 1763	950 /dm ² 0.0039 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 79430 /yd ²
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

CE
EN 14041
0493-CPD-0003

Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle














Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001



Pallas is a versatile loop pile carpet within a high-quality, contemporary collection. The choice of 12 broadloom colours within this range makes it easy to integrate this floor covering into almost any design. The colour line ranges from traditional greys and blues to warm neutrals and vivid colours, offering plenty of possibilities to personalise a space within any building.

											
Colour: 9985 L 24,42 LRV 4,23	Colour: 9021 L 34,48 LRV 8,24	Colour: 8803 L 22,10 LRV 3,54	Colour: 8501 L 26,63 LRV 4,96	Colour: 9516 L 50,25 LRV 18,63	Colour: 9513* L 43,62 LRV 13,58	Colour: 7913 L 43,86 LRV 13,74	Colour: 4321 L 31,04 LRV 6,67	Colour: 2033 L 41,61 LRV 12,25	Colour: 9094 L 41,46 LRV 12,15	Colour: 2922 L 32,15 LRV 7,15	Colour: 9502 L 38,73 LRV 10,50



9990

PERFECT

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8 " Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	5.8 mm 0.23 inch
Effective pile thickness	ISO 1766	3.3 mm 0.13 inch
Total mass	ISO 8543	2100 g/m ² 62.0 oz/yd ²
Total pile mass	ISO 2424	800 g/m ² 23.6 oz/yd ²
Effective pile mass	ISO 8543	540 g/m ² 15.9 oz/yd ²
Pile density	ISO 8543	0.163 g/cm ³ 0.0059 lb/in ³
Number of tufts	ISO 1763	1165 /dm ² 97406 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour






Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle





When looking for a neat carpet in deep single colours, Perfect is the answer. Its dense, detailed low level loop pile structure creates a minimalistic appearance, leaving room for the colours to excel. Contemporary naturals, strong greys and blacks and deep bright colours, such as red, green, blue and purple, offer colour options for any distinctive interior.

											
Colour: 9990 L 15,88 LRV 2,08	Colour: 3911 L 18,98 LRV 2,74	Colour: 8901 L 16,65 LRV 2,23	Colour: 8521 L 21,12 LRV 3,28	Colour: 8332 L 38,88 LRV 10,59	Colour: 8212 L 30,75 LRV 6,55	Colour: 7082 L 44,62 LRV 14,27	Colour: 9095 L 52,89 LRV 20,95	Colour: 2921 L 34,21 LRV 8,11	Colour: 5211 L 35,73 LRV 8,87	Colour: 4201 L 24,99 LRV 4,41	Colour: 4031 L 19,74 LRV 2,93
											
Colour: 2961 L 16,72 LRV 2,25	Colour: 9111 L 23,55 LRV 3,96	Colour: 9985 L 27,94 LRV 5,44	Colour: 9502 L 39,15 LRV 10,75								



SELECT

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32" Loop pile
Pile Fibre composition	ISO 2424	Solution dyed BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.4 mm 0.25 inch
Effective pile thickness	ISO 1766	3.6 mm 0.14 inch
Total mass	ISO 8543	1700 g/m ² 50.2 oz/yd ²
Total pile mass	ISO 2424	600 g/m ² 17.7 oz/yd ²
Effective pile mass	ISO 8543	420 g/m ² 12.4 oz/yd ²
Pile density	ISO 8543	0.117 g/cm ³ 0.0042 lb/in ³
Number of tufts	ISO 1763	1030 /dm ² 86118 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:
Desso
Parallelweg 14
NL - 5051HG Goirle





236

161

Value for money is at the core of Select's product offer. Its strong loop pile structure in solution dyed yarns, easily applicable colours and multi-colour dirt-hiding design, ensure a broadloom flooring solution for endless commercial applications.



Colour: 9531
L 29,60
LRV 6,07



Colour: 9975
L 33,21
LRV 7,63



Colour: 8812
L 32,57
LRV 7,34



Colour: 8432
L 34,43
LRV 8,21



Colour: 2056
L 42,01
LRV 12,50



Colour: 2087
L 35,79
LRV 8,90



Colour: 2127
L 31,01
LRV 6,65



Colour: 2931
L 32,45
LRV 7,29



9103

SPARX

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8" structured loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	3.5 mm 0.14 inch
Total mass	ISO 8543	2150 g/m ² 63.5 oz/yd ²
Total pile mass	ISO 2424	840 g/m ² 24.8 oz/yd ²
Effective pile mass	ISO 8543	550 g/m ² 16.2 oz/yd ²
Pile density	ISO 8543	0.155 g/cm ³ 0.0056 lb/in ³
Number of tufts	ISO 1763	1323 /dm ² 110616 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour

CE
EN 14041
0493-CPD-0003

Approved for:
Desso NV
Rafaelweg 10, straat 89
NL-9206 Dordrecht
Tel: 9206 1100
















GUT
23382


GRU
GREEN LINE
+PLUS

Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001



Sparx is a hardwearing loop pile broadloom carpet with a distinctive black linear pattern. It has a ribbed structure in a combination of matt and lustrous yarns, providing an intriguing layered, reflective effect when viewed from above. Sparx is available in 12 classical colours.

											
Colour: 9975 L 25,97 LRV 4,74	Colour: 8901 L 18,78 LRV 2,69	Colour: 8811 L 18,98 LRV 2,74	Colour: 9062 L 22,84 LRV 3,75	Colour: 9980 L 18,03 LRV 2,52	Colour: 9532 L 19,69 LRV 2,91	Colour: 9001 L 16,62 LRV 2,22	Colour: 2941 L 21,32 LRV 3,33	Colour: 2942 L 24,89 LRV 4,38	Colour: 4421 L 25,09 LRV 4,44	Colour: 2127 L 20,26 LRV 3,05	Colour: 9103 L 29,64 LRV 6,09

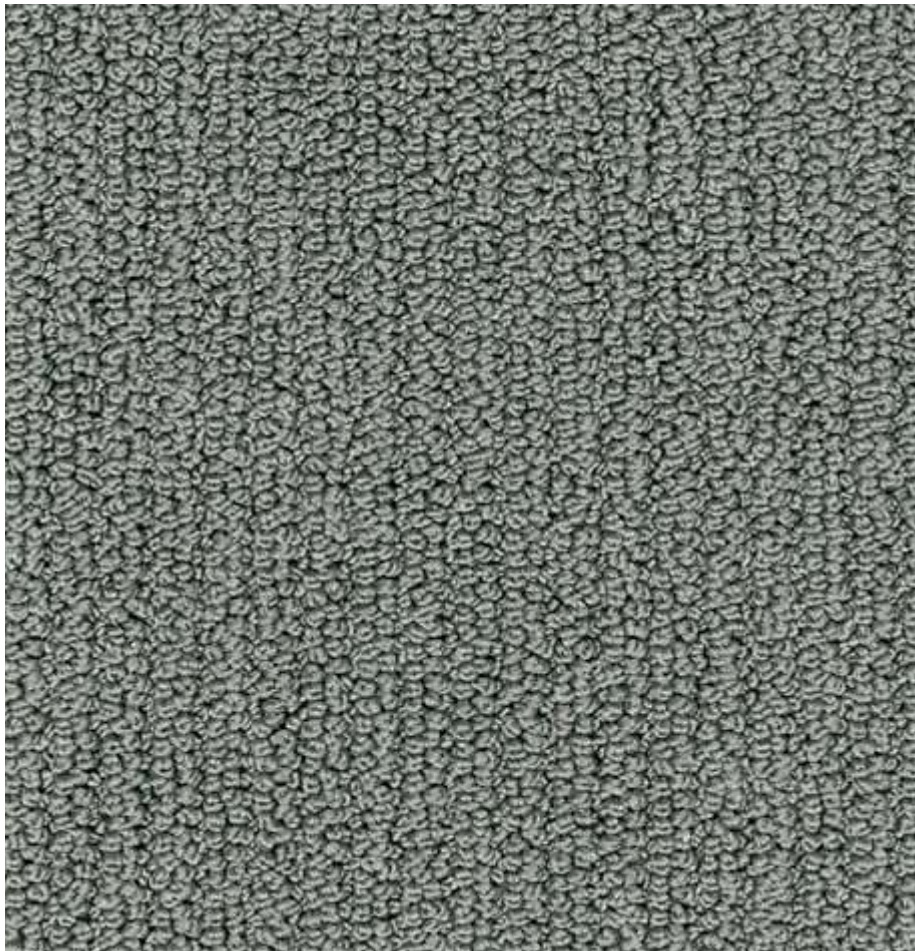

9504

STEEL

Specification according to EN 1307


Type of manufacture	ISO 2424	Tufted 5/32" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.7 mm 0.26 inch
Effective pile thickness	ISO 1766	3.8 mm 0.15 inch
Total mass	ISO 8543	2625 g/m ² 77.5 oz/yd ²
Total pile mass	ISO 2424	1235 g/m ² 36.5 oz/yd ²
Effective pile mass	ISO 8543	835 g/m ² 24.6 oz/yd ²
Pile density	ISO 8543	0.220 g/cm ³ 0.0079 lb/in ³
Number of tufts	ISO 1763	1600 /dm ² 133776 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle



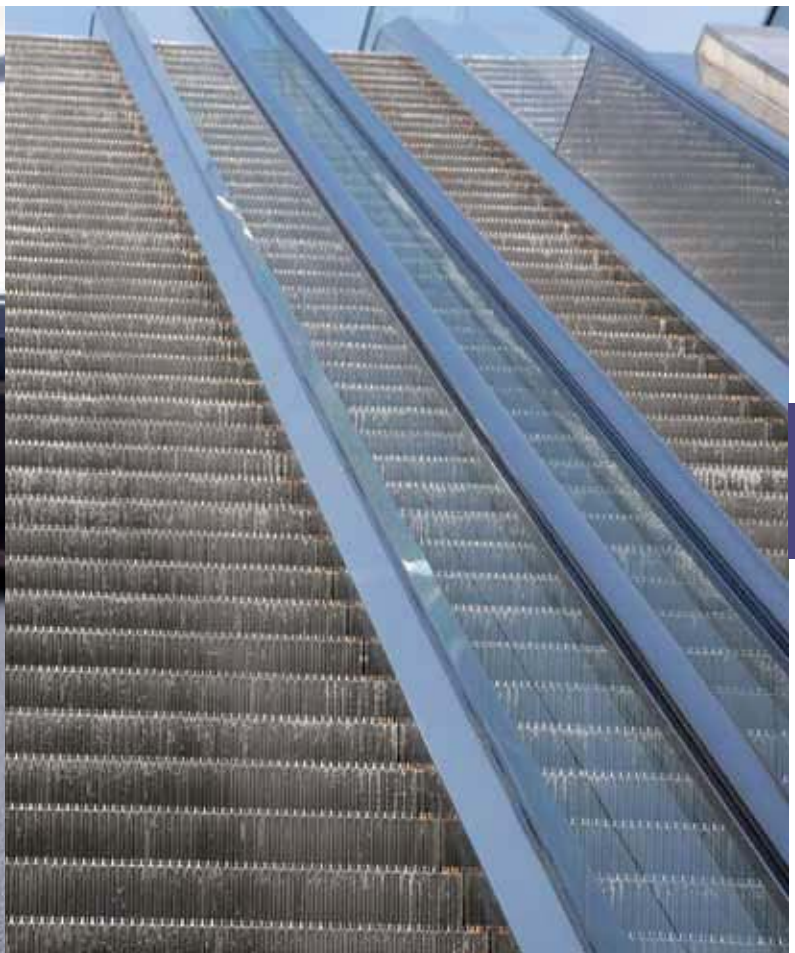

This broadloom carpet combines lustrous chic design with rich comfort into one all-round flooring solution. The subtly ribbed high low structure of Steel creates a playful effect of light on the shiny yarns, adding another dimension to the floor. This is emphasized by the selection of 12 single, metallic colours in shades of grey, blue, beige and red.

Colour: 9990 L 19,76 LRV 2,93	Colour: 8811 L 24,64 L 4,30	Colour: 8832 L 29,08 LRV 5,87	Colour: 7282 L 40,31 LRV 11,44	Colour: 6321 L 51,62 LRV 19,81	Colour: 9096 L 53,95 LRV 21,93	Colour: 2022 L 41,12 LRV 11,94	Colour: 2035 L 46,61 LRV 15,73	Colour: 2056 L 40,06 LRV 11,29	Colour: 2102 L 31,37 LRV 6,81	Colour: 9113 L 34,02 LRV 8,02	Colour: 9504 L 44,92 LRV 14,49



8822

TEMPRA

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	4.5 mm
Effective pile thickness	ISO 1766	2.2 mm 0.18 inch
Total mass	ISO 8543	1950 g/m ² 0.09 inch
Total pile mass	ISO 2424	580 g/m ² 57.6 oz/yd ²
Effective pile mass	ISO 8543	370 g/m ² 17.1 oz/yd ²
Pile density	ISO 8543	0.170 g/cm ³ 10.9 oz/yd ³
Number of tufts	ISO 1763	1620 /dm ² 0.0061 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 135448 /yd ²
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour


 Manufactured by:
 Desso
 Parallelweg 14
 NL - 5051HG Goirle
 EN 14041
 0493-CPD-0003

















21947

Quality and Environmental
 Management System Certification
 ISO 9001 & ISO 14001

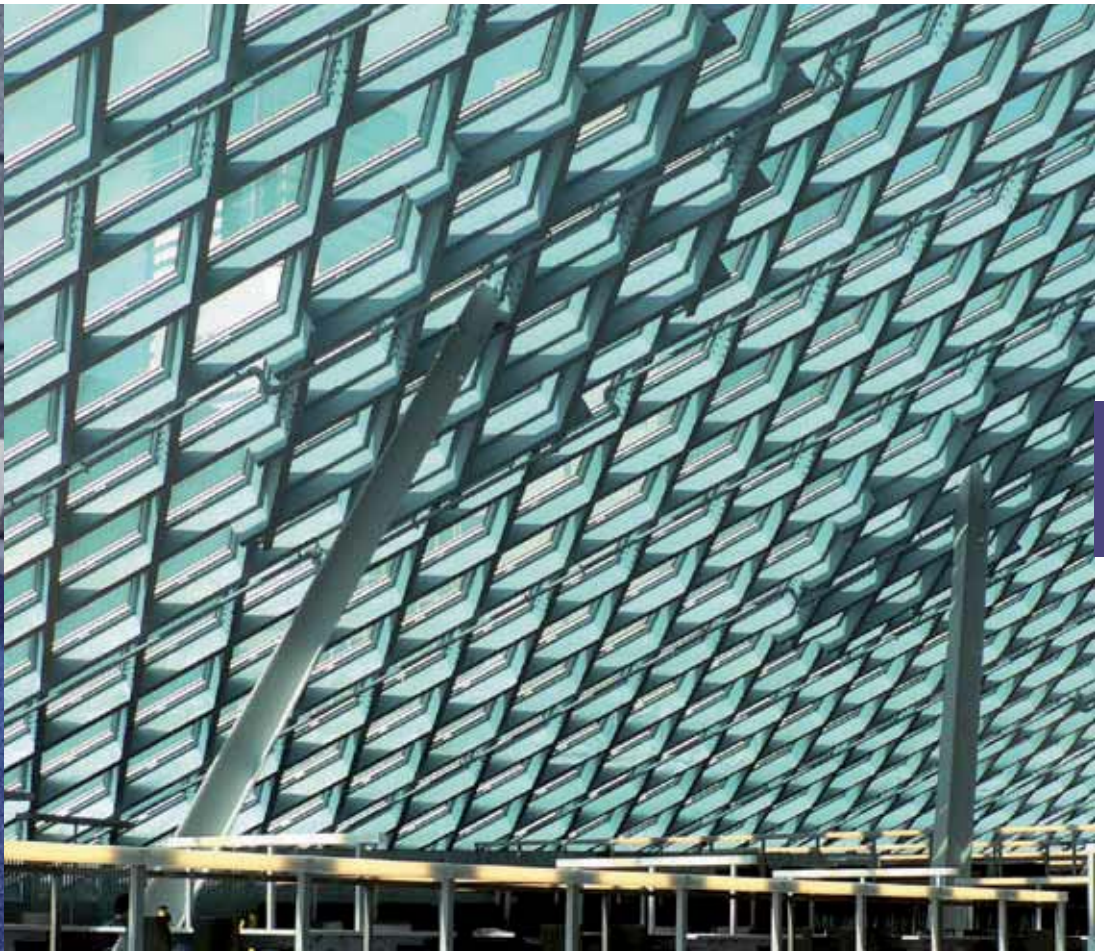

Tempra is a range of extremely practical carpet tiles that is contemporary yet timeless. The choice of 16 broadloom colours offers endless opportunities for creative interior designs. With its dense low level loop pile structure and strong colours, this exceptionally hardwearing carpet creates just the right lively style to inspire any busy team.

											
Colour: 3007 L 22,31 LRV 3,60	Colour: 3841 L 19,94 LRV 2,97	Colour: 8801 L 26,05 LRV 4,76	Colour: 8111 L 25,53 LRV 4,59	Colour: 7331 L 28,33 LRV 5,58	Colour: 2036 L 47,04 LRV 16,05	Colour: 4311 L 25,91 LRV 4,71	Colour: 3421 L 18,31 LRV 2,59	Colour: 2081 L 18,94 LRV 2,73	Colour: 2041 L 32,90 LRV 7,49	Colour: 9533 L 43,59 LRV 13,55	Colour: 9511 L 21,55 LRV 3,39
											
Colour: 9531 L 20,36 LRV 3,08	Colour: 9091 L 21,60 LRV 3,41	Colour: 9021 L 24,19 LRV 4,16	Colour: 9504 L 46,59 LRV 15,71								



9025/4202

TORSO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.5 mm
Effective pile thickness	ISO 1766	4.0 mm 0.26 inch
Total mass	ISO 8543	2200 g/m ² 0.16 inch
Total pile mass	ISO 2424	850 g/m ² 64.9 oz/yd ²
Effective pile mass	ISO 8543	650 g/m ² 25.1 oz/yd ²
Pile density	ISO 8543	0.160 g/cm ³ 19.2 oz/yd ²
Number of tufts	ISO 1763	1930 /dm ² 0.0058 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 161367 /yd ²
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




EN 14041
0493-CPD-0003

Manufactured by:







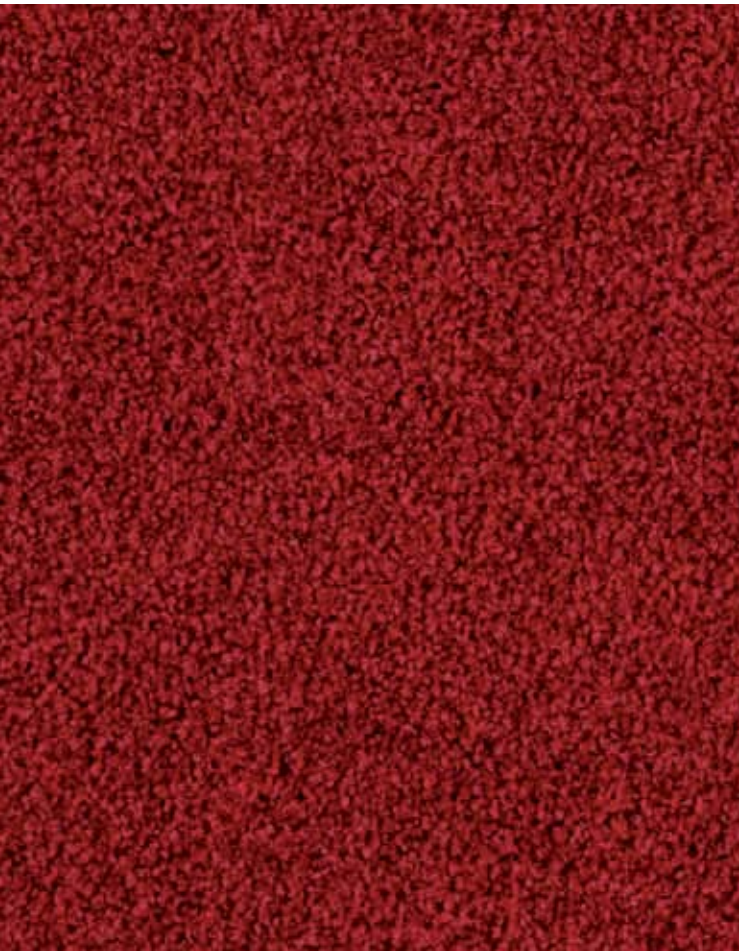













Desso
Parallelweg 14
NL - 5051HG Goirle



Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001



Torso is a luxurious but durable cut pile carpet, available in both broadloom and carpet tiles. A subtle combination of light and dark tones adds depth of colour and creates a rich appearance. With a broad range of 60 contemporary colours (20 colours in broadloom), Torso provides a range of exciting shades for any commercial environment. Torso is luxurious but practical, tough yet tactile.

											
Colour: 9012 L 18,88 LRV 2,72	Colour: 9022 L 23,16 LRV 3,85	Colour: 8813 L 19,45 LRV 2,85	Colour: 3111 L 24,23 LRV 4,17	Colour: 8422 L 26,43 LRV 4,89	Colour: 8517 L 36,49 LRV 9,27	Colour: 8411 L 37,02 LRV 9,55	Colour: 9024 L 33,25 LRV 7,65	Colour: 2914 L 32,57 LRV 7,34	Colour: 9104 L 40,71 LRV 11,68	Colour: 2921 L 22,56 LRV 3,67	Colour: 2053 L 31,30 LRV 6,78
											
Colour: 5421 L 48,34 LRV 17,06	Colour: 4202 L 26,24 LRV 4,83	Colour: 2087 L 26,57 LRV 4,94	Colour: 4021 L 17,00 LRV 2,30	Colour: 9061 L 17,98 LRV 2,51	Colour: 9502 L 25,88 LRV 4,71	Colour: 9975 L 38,67 LRV 10,47	Colour: 9025 L 53,34 LRV 21,36				



8423

TRAPEZ

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Cut pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven + fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.5 mm
Effective pile thickness	ISO 1766	3.2 mm 0.26 inch
Total mass	ISO 8543	2050 g/m ² 0.13 inch
Total pile mass	ISO 2424	750 g/m ² 60.5 oz/yd ²
Effective pile mass	ISO 8543	470 g/m ² 22.1 oz/yd ²
Pile density	ISO 8543	0.145 g/cm ³ 13.9 oz/yd ²
Number of tufts	ISO 1763	1930 /dm ² 0.0052 lb/in ³
Stroll test	ISO 6356	≤ 2.0 kV 161367 /yd ²
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B ₁ - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003

Manufactured by:


Desso
Parallelweg 14
NL - 5051HG Goirle




Quality- and Environmental
Management System Certification
ISO 9001 & ISO 14001



Trapez is the perfect solution for both large and small areas, providing a luxurious underfoot feel with long-lasting appearance. With a choice of tile or broadloom in each colour, it can easily be used for corridors or stairs, open areas or raised access floors. The wide colour range covers the entire colour spectrum, from greys and blues to more vibrant accent colours.

											
Colour: 9985 L 16,88 LRV 2,28	Colour: 9021 L 15,99 LRV 2,10	Colour: 3921 L 18,80 LRV 2,70	Colour: 8811 L 17,34 LRV 2,37	Colour: 3841 L 15,34 LRV 1,97	Colour: 8801 L 28,94 LRV 5,82	Colour: 8422 L 28,87 LRV 5,79	Colour: 8423 L 35,23 LRV 8,61	Colour: 8803 L 37,08 LRV 9,58	Colour: 8832 L 40,01 LRV 11,26	Colour: 8073 L 32,26 LRV 7,20	Colour: 8161 L 29,41 LRV 6,00
											
Colour: 7833 L 42,00 LRV 12,50	Colour: 2048 L 44,80 LRV 14,40	Colour: 2043 L 38,54 LRV 10,39	Colour: 2943 L 40,62 LRV 11,63	Colour: 2086 L 34,16 LRV 8,09	Colour: 4102 L 28,68 LRV 5,71	Colour: 2127 L 23,00 LRV 3,80	Colour: 2952 L 26,25 LRV 4,83	Colour: 9103 L 31,38 LRV 6,81	Colour: 9023 L 28,27 LRV 5,56	Colour: 9033 L 33,76 LRV 7,89	Colour: 8905 L 41,85 LRV 12,40

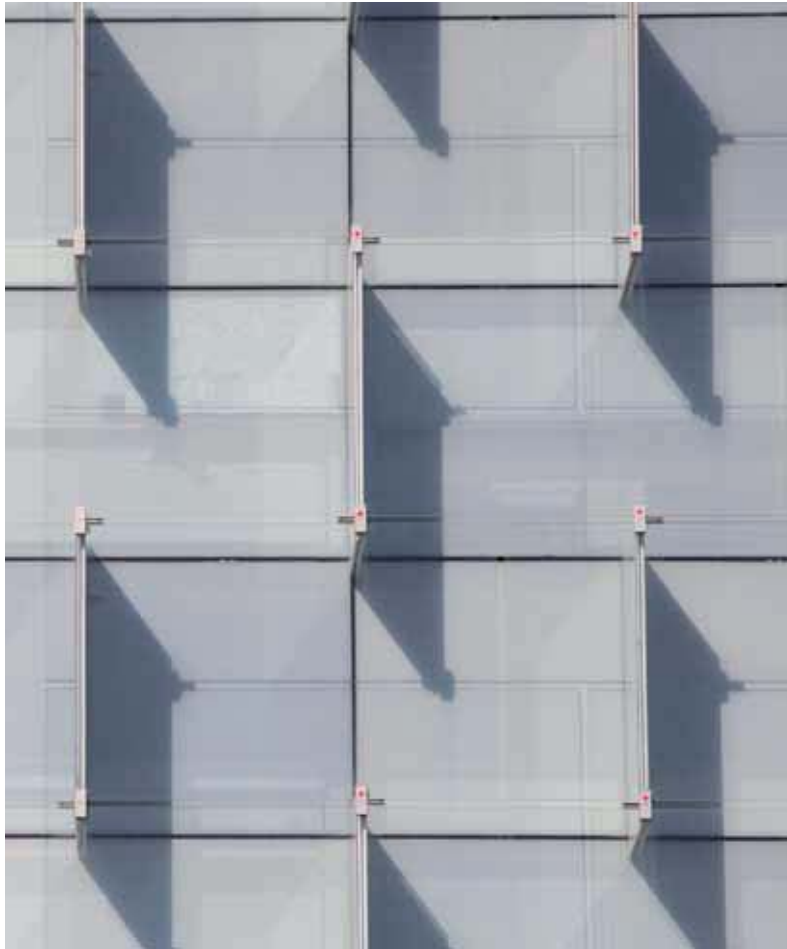

TRAX

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" loop pile
Pile Fibre	ISO 2424	Space dyed + solution dyed BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polyester - polyamide fleece
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	3.3 mm 0.13 inch
Total mass	ISO 8543	2000 g/m ² 59.0 oz/yd ²
Total pile mass	ISO 2424	625 g/m ² 18.4 oz/yd ²
Effective pile mass	ISO 8543	500 g/m ² 14.8 oz/yd ²
Pile density	ISO 8543	0.150 g/cm ³ 0.0054 lb/in ³
Number of tufts	ISO 1763	1540 /dm ² 128759 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle
















9502

Trax uses the tactile nature of wooden surfaces to create a warm, friendly connection to the human spirit. Other materials such as bamboo and clay are also at play, emphasizing the natural quality of the design. There are eight colours, each representing a natural flow.

- | | | | | | | | |
|--|---|---|---|---|---|---|--|
|  |  |  |  |  |  |  |  |
| Colour: 8901
L 24,06
LRV 4,12 | Colour: 9501
L 30,08
LRV 6,27 | Colour: 9521
L 29,21
LRV 5,92 | Colour: 2931
L 35,09
LRV 8,54 | Colour: 9104
L 40,24
LRV 11,40 | Colour: 9502
L 35,35
LRV 8,67 | Colour: 9063
L 34,43
LRV 8,22 | Colour: 2035
L 43,74
LRV 13,66 |



TYPO

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10" Loop pile
Pile Fibre composition	ISO 2424	Piece dyed continuous BCF Polyamide 6
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene woven
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Total thickness	ISO 1765	6.0 mm 0.24 inch
Effective pile thickness	ISO 1766	3.6 mm 0.14 inch
Total mass	ISO 8543	1900 g/m ² 56.1 oz/yd ²
Total pile mass	ISO 2424	625 g/m ² 18.4 oz/yd ²
Effective pile mass	ISO 8543	420 g/m ² 12.4 oz/yd ²
Pile density	ISO 8543	0.117 g/cm ³ 0.0042 lb/in ³
Number of tufts	ISO 1763	866 /dm ² 72406 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	B _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour



EN 14041
0493-CPD-0003

Manufactured by:

Desso
Parallelweg 14
NL - 5051HG Goirle














9985



Typo is an attractive loop pile broadloom carpet, easily applicable in commercial environments. The white speckle creates a surprising effect and adds brightness to every colour. The colour line ranges from more neutral tones to vibrant bold shades, to set the tone in any interior.

										
Colour: 9985 L 28,38 LRV 5,60	Colour: 9022 L 29,29 LRV 5,95	Colour: 8801 L 25,31 LRV 4,52	Colour: 8822 L 37,57 LRV 9,85	Colour: 8171 L 29,31 LRV 5,96	Colour: 7811 L 31,19 LRV 6,73	Colour: 5412 L 45,13 LRV 14,64	Colour: 2098 L 36,56 LRV 9,30	Colour: 2121 L 26,65 LRV 4,97	Colour: 3912 L 29,27 LRV 5,95	Colour: 9035 L 50,14 LRV 18,54

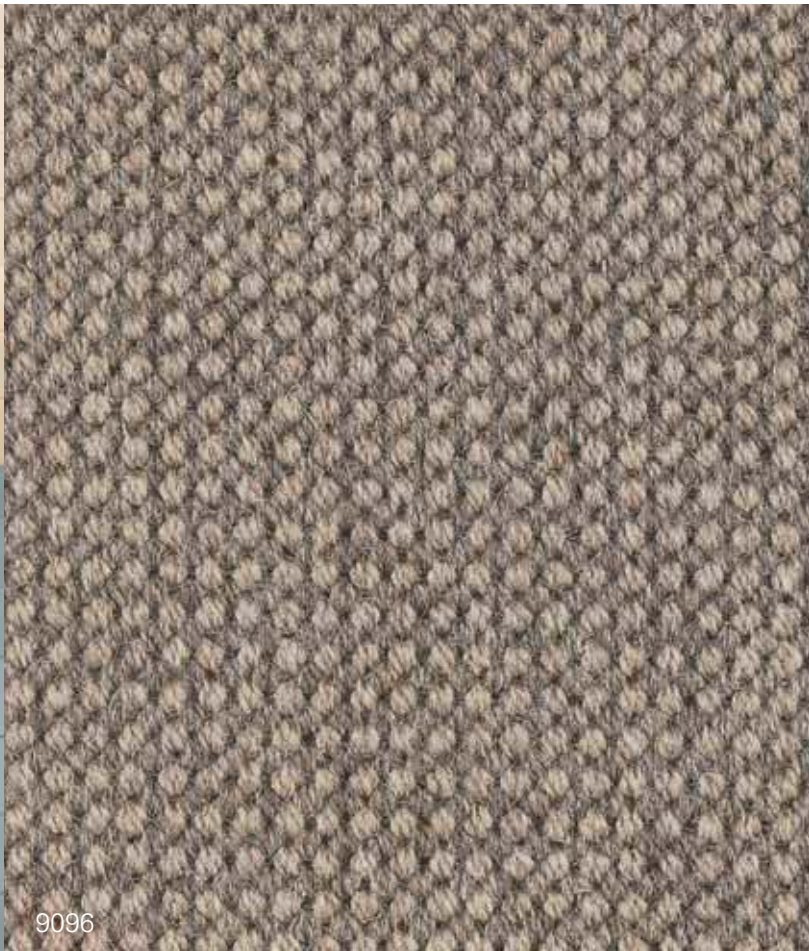

9096

RODIN

Type of manufacture	ISO 2424	Woven - Wilton Loop pile
Pile Fibre	ISO 2424	Hank dyed 80% wool - 20% hair
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene / Polyester - viscose
Secondary backing	ISO 2424	Finish
Total thickness	ISO 1765	6.5 mm 0.26 inch
Effective pile thickness	ISO 1766	4.4 mm 0.17 inch
Total mass	ISO 8543	1700 g/m ² 50.2 oz/yd ²
Total pile mass	ISO 2424	1050 g/m ² 31.0 oz/yd ²
Effective pile mass	ISO 8543	825 g/m ² 24.3 oz/yd ²
Pile density	ISO 8543	0.190 g/cm ³ 0.0069 lb/in ³
Number of tufts	ISO 1763	890 /dm ² 74413 /yd ²
Stroll test	ISO 6356	≤ 2,0 Kv
Classification for use	EN 1307	31 Commercial - moderate use
Flammability	EN 13501-1	B _{fl} - s1




Manufactured by:
 Desso NV
 Robert Ramlotstraat 89
 B - 9200 Dendermonde





2053

Rodin is a Wilton woven carpet with a modern "sisal-look." The unique structure of wool and goat hair creates a natural look and gives the product extra strength and durability. Rodin is available in a refined range of natural colours, suitable for every interior, from modern to classical.

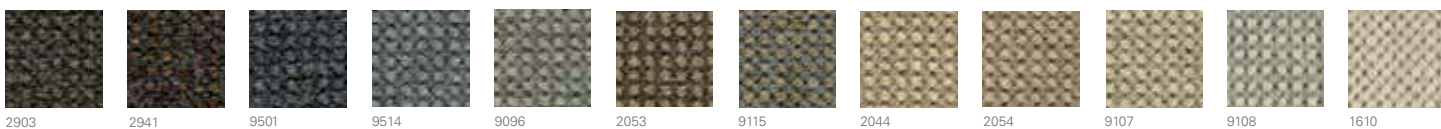



WILTON IN GREY

Specification according to EN 1307

		151-155		150
Type of manufacture	ISO 2424	Woven - Wilton Loop + cut pile		Woven - Wilton cut pile
Pile Fibre	ISO 2424	Solution dyed BCF Polyamide 6.6		Solution dyed BCF Polyamide 6.6
Width	CEN/TS 14159	400 cm / 13' 1.5"		400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene / Polyester - viscose		Polypropylene / Polyester - viscose
Secondary backing	ISO 2424	Finish		Finish
Total thickness	ISO 1765	6.5 mm	0.26 inch	6.5 mm
Effective pile thickness	ISO 1766	4.4 mm	0.17 inch	4.6 mm
Total mass	ISO 8543	1750 g/m ²	51.7 oz/yd ²	1600 g/m ²
Total pile mass	ISO 2424	1000 g/m ²	29.5 oz/yd ²	910 g/m ²
Effective pile mass	ISO 8543	610 g/m ²	18.0 oz/yd ²	780 g/m ²
Pile density	ISO 8543	0.140 g/cm ³	0.0051 lb/in ³	0.170 g/cm ³
Number of tufts	ISO 1763	950 /dm ²	79430 /yd ²	980 /dm ²
Stroll test	ISO 6356	≤ 2.0 kV		≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm		≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use		33 Commercial - heavy use
Flammability	EN 13501-1	C _{fl} - s1		C _{fl} - s1




Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde





9985-152

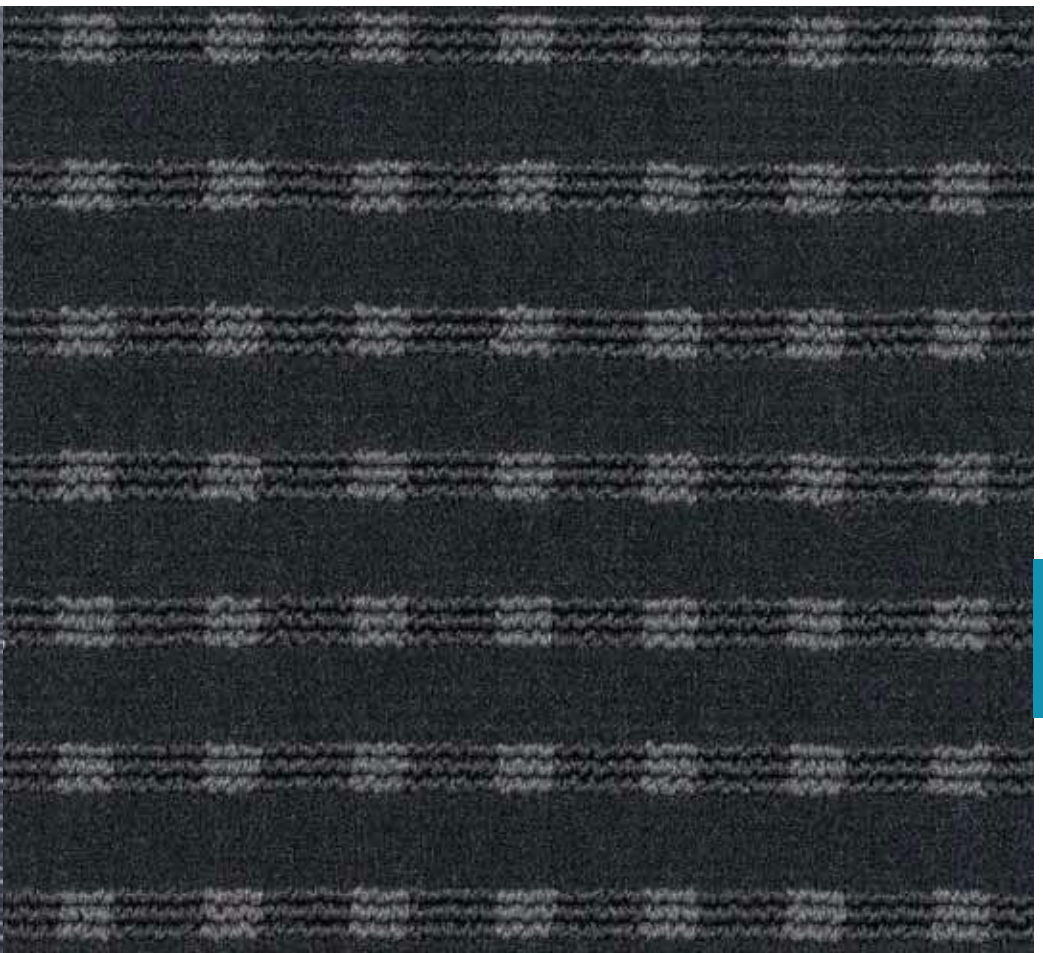


An interesting collection of refined grey tints with six distinct patterns in common harmony. The various patterns can be used individually or in combination to enhance design from office to boardroom, shop to showroom. Wilton in Grey beautifully complements glass and metal and accents wood, stone and brick. Wilton in Grey: a range for designer environments.



Colour: 9985_150
L 30,12
LRV 6,29



Colour: 9985_151
L 29,39
LRV 5,99



Colour: 9985_152
L 23,83
LRV 4,05



Colour: 9985_153
L 26,10
LRV 4,78



Colour: 9985_154
L 29,82
LRV 6,16



9985_155
L 24,58
LRV 4,28



WILTON IN RIBS

Specification according to EN 1307

Type of manufacture	ISO 2424	Woven - Wilton Loop pile
Pile Fibre	ISO 2424	Hank dyed Polyamide 6.6 spun yarn
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene / Polyester - viscose
Secondary backing	ISO 2424	Finish
Total thickness	ISO 1765	5.5 mm 0.22 inch
Effective pile thickness	ISO 1766	3.0 mm 0.12 inch
Total mass	ISO 8543	1700 g/m ² 50.2 oz/yd ²
Total pile mass	ISO 2424	820 g/m ² 24.2 oz/yd ²
Effective pile mass	ISO 8543	545 g/m ² 16.1 oz/yd ²
Pile density	ISO 8543	0.185 g/cm ³ 0.0067 lb/in ³
Number of tufts	ISO 1763	1000 /dm ² 83610 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm
Classification for use	EN 1307	33 Commercial - heavy use
Flammability	EN 13501-1	C _{fl} - s1
Light Reflectance Value (LRV)	BS 8493	See right page per colour
Colour depth (L)	CIELAB	See right page per colour




Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde





4331

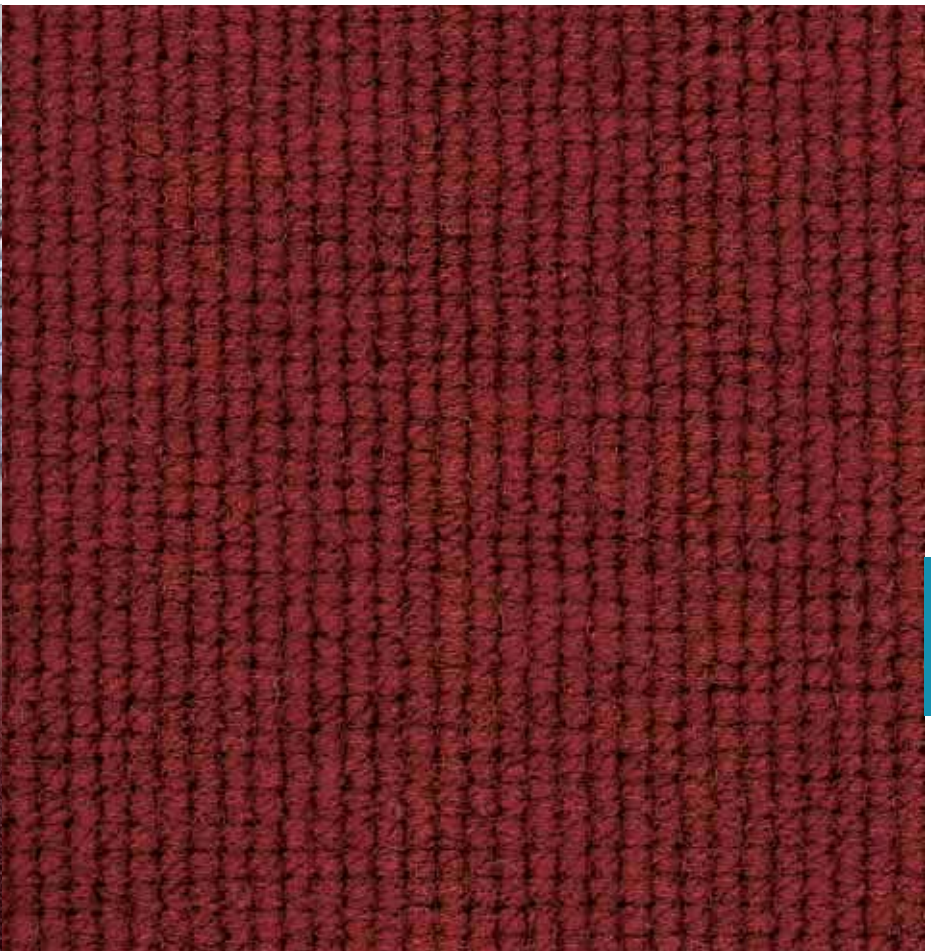

Wilton in Ribs is a premium quality woven carpet for areas requiring restrained exclusivity. Its tranquil colours, warmth and comfort create a stylish yet timeless ambience. Wilton in Ribs works perfectly with the neutral tones of natural wood and stone. It is therefore, often found in more luxurious environments.



Colour: 9031
L 15,82
LRV 2,06



Colour: 9032
L 23,60
LRV 3,98



Colour: 9092
L 30,01
LRV 6,24



Colour: 8901
L 13,65
LRV 1,67



Colour: 8801
L 21,63
LRV 3,41



Colour: 9512
L 36,49
LRV 9,26




Colour: 9504
L 45,99
LRV 15,26



Colour: 9104
L 41,47
LRV 12,16



Colour: 9095
L 53,34
LRV 21,36



Colour: 2047
L 37,46
LRV 9,79



Colour: 2035
L 47,79
LRV 16,63



Colour: 4331
L 28,49
LRV 5,64



9900-178

WILTON METALLIC

Specification according to EN 1307


	172	171,175,176,178,173,174,177
Type of manufacture	Woven - Wilton Loop pile	Woven - Wilton Loop + cut pile
Pile Fibre	Solution dyed BCF Polyamide 6.6	Solution dyed BCF Polyamide 6.6
Width	400 cm / 13' 1.5"	400 cm / 13' 1.5"
Primary backing	Polypropylene / Polyester - viscose	Polypropylene / Polyester - viscose
Secondary backing	Finish	Finish
Total thickness	5.5 mm 0.22 inch	7.0 mm 0.28 inch
Effective pile thickness	3.6 mm 0.14 inch	4.3 mm 0.17 inch
Total mass	1500 g/m ² 44.3 oz/yd ²	1750 g/m ² 51.7 oz/yd ²
Total pile mass	760 g/m ² 22.4 oz/yd ²	1000 g/m ² 29.5 oz/yd ²
Effective pile mass	630 g/m ² 18.6 oz/yd ²	640 g/m ² 18.9 oz/yd ²
Pile density	0.175 g/cm ³ 0.0063 lb/in ³	0.150 g/cm ³ 0.0054 lb/in ³
Number of tufts	965 /dm ² 80684 /yd ²	965 /dm ² 80684 /yd ²
Stroll test	≤ 2.0 kV	≤ 2.0 kV
Vertical resistance	≤ 1x10 ⁹ Ohm	≤ 1x10 ⁹ Ohm
Classification for use	33 Commercial - heavy use	33 Commercial - heavy use
Flammability	C _{fl} - s1	C _{fl} - s1
Light Reflectance Value (LRV)	See right page per colour	See right page per colour
Colour depth (L)	See right page per colour	See right page per colour



Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde



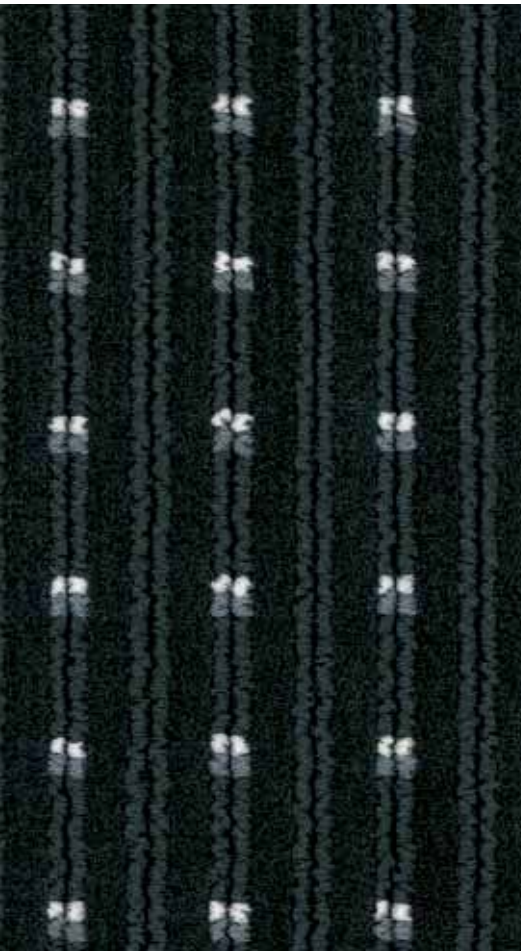

9900-175

Metallic is the look of the century. High-tech, sleek, professional and dynamic. Whether in cars, audio and video equipment, architecture or carpeting, metallic aesthetics are at the cutting edge of design. The Wilton Metallic collection reflects this stylish design trend.



Colours: 9900.171
L 17,89
LRV 2,49



Colours: 9900.172
L 20,49
LRV 3,11



Colours: 9900.173
L 19,39
LRV 2,84



Colours: 9900.174
L 23,15
LRV 3,84



Colours: 9900.175
L 19,15
LRV 2,78



Colours: 9900.176
L 20,70
LRV 3,17



Colours: 9900.177
L 26,63
LRV 4,96



Colours: 9900.178
L 19,55
LRV 2,88



9503

WILTON PROFILE

Specification according to EN 1307

Type of manufacture	ISO 2424	Woven - Wilton Loop pile	
Pile Fibre	ISO 2424	Hank dyed BCF Polyamide 6.6	
Width	CEN/TS 14159	400 cm / 13' 1.5"	
Primary backing	ISO 2424	Polypropylene / Polyester - viscose	
Secondary backing	ISO 2424	Finish	
Total thickness	ISO 1765	6.0 mm	0.24 inch
Effective pile thickness	ISO 1766	3.2 mm	0.13 inch
Total mass	ISO 8543	2000 g/m ²	59.0 oz/yd ²
Total pile mass	ISO 2424	1100 g/m ²	32.5 oz/yd ²
Effective pile mass	ISO 8543	600 g/m ²	17.7 oz/yd ²
Pile density	ISO 8543	0.190 g/cm ³	0.0069 lb/in ³
Number of tufts	ISO 1763	890 /dm ²	74413 /yd ²
Stroll test	ISO 6356	≤ 2.0 kV	
Vertical resistance	ISO 10965	≤ 1x10 ⁹ Ohm	
Classification for use	EN 1307	33 Commercial - heavy use	
Flammability	EN 13501-1	C _{fl} - s1	




Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde



Quality and Environmental
Management System Certification
ISO 9001 & ISO 14001

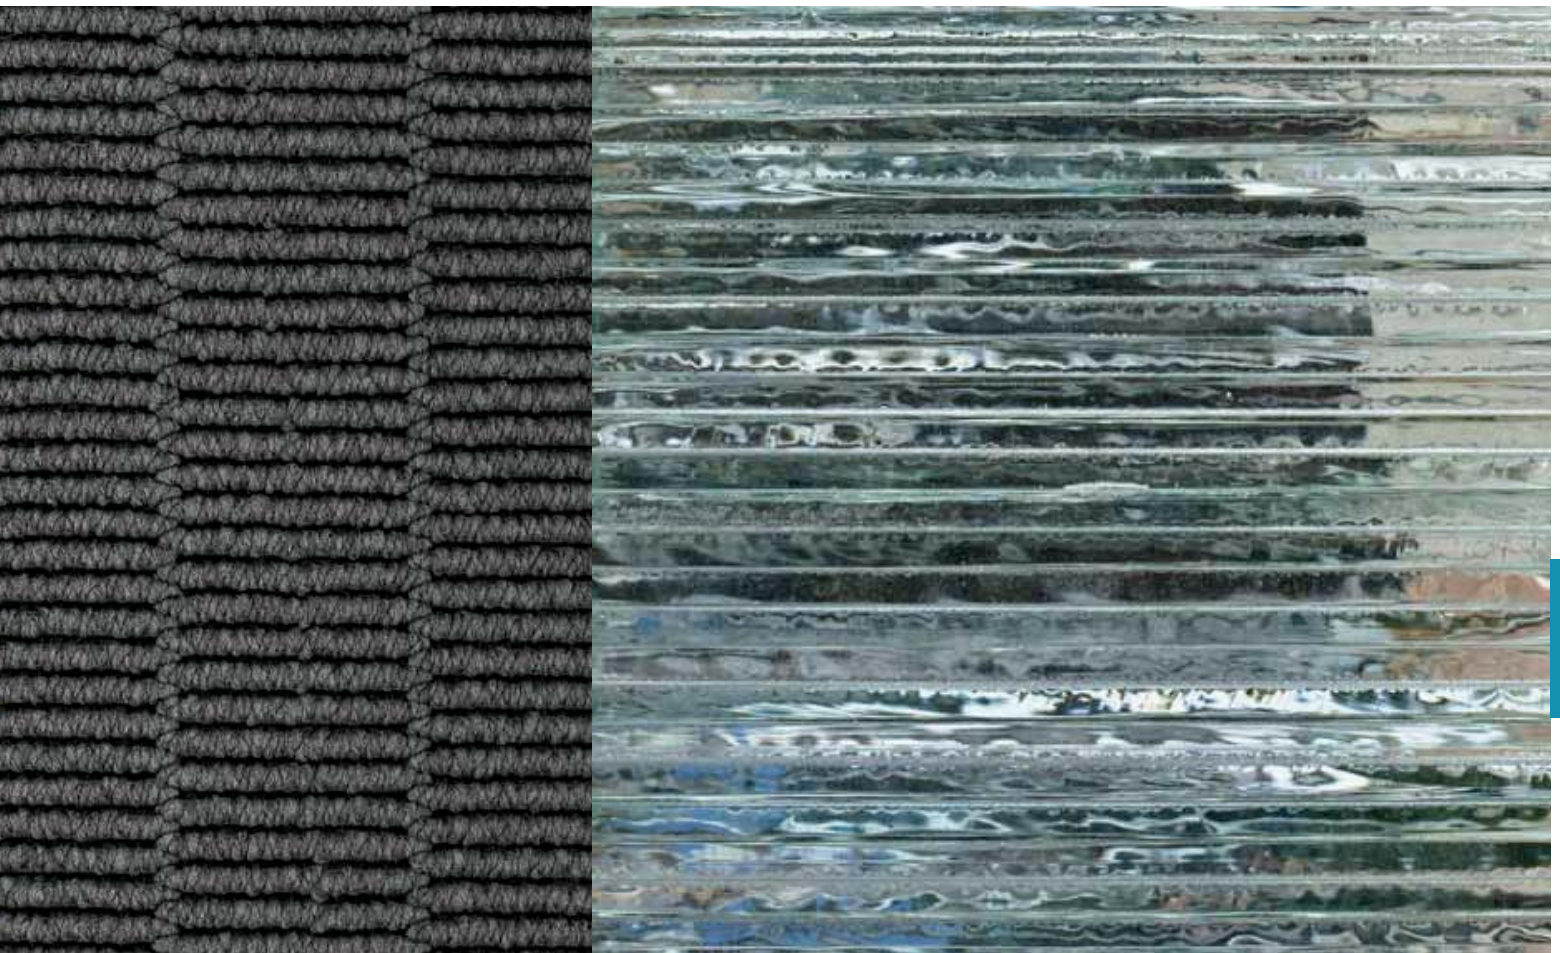

This high-end woven carpet displays a dense and detailed rib structure. Wilton Profile combines a contemporary chunky groove structure with classic Wilton quality, and is available in 12 earthy colours for elegant interior designs. This carpet is particularly suitable for executive offices, boardrooms and conference facilities.

											
Colour: 9501 L 18,44 LRV 2,62	Colour: 8802 L 31,24 LRV 6,75	Colour: 9503 L 37,68 LRV 9,91	Colour: 9502 L 30,45 LRV 6,42	Colour: 9113 L 27,27 LRV 5,19	Colour: 2903 L 35,81 LRV 8,91	Colour: 2919 L 46,34 LRV 15,52	Colour: 2044 L 49,45 LRV 17,96	Colour: 9115 L 45,79 LRV 15,11	Colour: 9104 L 36,70 LRV 9,37	Colour: 2053 L 31,40 LRV 6,82	Colour: 2941 L 22,69 LRV 3,71



AXMINSTER WOVEN

Specification according to EN 1307

Type of manufacture	ISO 2424	Woven - Axminster
Aspect	ISO 2424	Cutpile
Pile Fibre	ISO 2424	Hank dyed 100% polyamide or 80/20 wool/polyamide
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene / Polyester - viscose
Secondary backing	ISO 2424	Finish

Please contact Desso for all options in pile weight, 2 or 3 ply yarn, rows, design and color.



Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde





Axminster, a traditional woven carpet developed over 250 years ago for royal residences, is now used almost universally in the finest luxury hotel and resort installations due to its beauty, capability of rendering complex, crispy clear patterns and long term durability. Desso offers both 2-ply and 3-ply yarns in 80%wool /20% polyamide and 100% polyamide in 7-8-9 and 10 row specification, allowing the architect / designer the optimal choice for every specific use. Dyed yarns are placed into the carpet creating clear separation of color and perfect clarity of pattern. Large repeats can be produced. All Desso axminster carpets are custom designed. Our talented design teams work closely together with the R&D community to achieve distinctive designs. Accurate color matches are assured by our full spectrum POM palette box.





GRAVURE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10"
Aspect	ISO 2424	Cutpile
Pile Fibre	ISO 2424	Print, 100% polyamide or 80/20 wool/polyamide
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polyester fleece
Secondary backing	ISO 2424	Polypropylene woven

Please contact Desso for all options in pile weight, design and color.

CE
EN 14041

Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde





Gravure is created through carpet printing machines which apply pattern to a 'white' tufted carpet surface by injecting dye through high pressure jet heads, achieving optimal dye penetration for outstanding colour and design clarity. This allows for unprecedented freedom to create inspired, unique carpet designs.





SYMPHONY Á LA CARTE

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8"
Aspect	ISO 2424	Cutpile Hank dyed, 80/20 wool/polyamide
Pile Fibre	ISO 2424	400 cm / 13' 1.5"
Width	CEN/TS 14159	Polyester - polyamide fleece
Primary backing	ISO 2424	Polypropylene woven - Sandwich Backing
Secondary backing	ISO 2424	


Please contact Desso for all options in pile weight, design and color.

CE
EN 14041

Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde



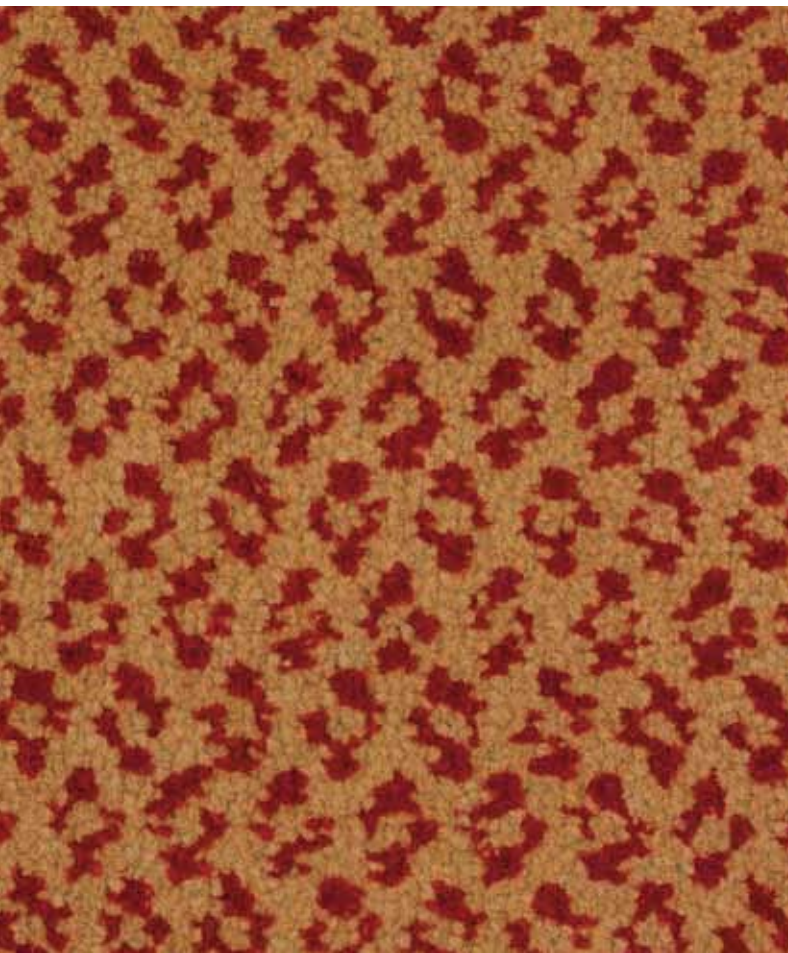

Tufted cutpile graphics machines use computer controlled tufting technology to generate custom designs ranging from small pin dots to medium size trellises. Tufted Graphic construction is ideal for hotel guest rooms, as well as budget conscious public areas. With a perfectly engineered 80/20 wool/polyamide cutpile, Symphony extends a luxurious welcome. Coordinated with the latest fabrics, Symphony colors and sophistication make it the ideal backdrop for any hospitality interior.





WILTON WOVEN

Specification according to EN 1307

Type of manufacture	ISO 2424	Woven wilton loop, cut or cut/loop pile
Pile Fibre	ISO 2424	Hank dyed 80/20 wool/polyamide or 100% wool
Width	CEN/TS 14159	400 cm / 13' 1.5"
Primary backing	ISO 2424	Polypropylene / Polyester - viscose
Secondary backing	ISO 2424	Finish


Please contact Desso for all options in pile weight, rows, design and color.



Manufactured by:

Desso NV
Robert Ramlotstraat 89
B - 9200 Dendermonde



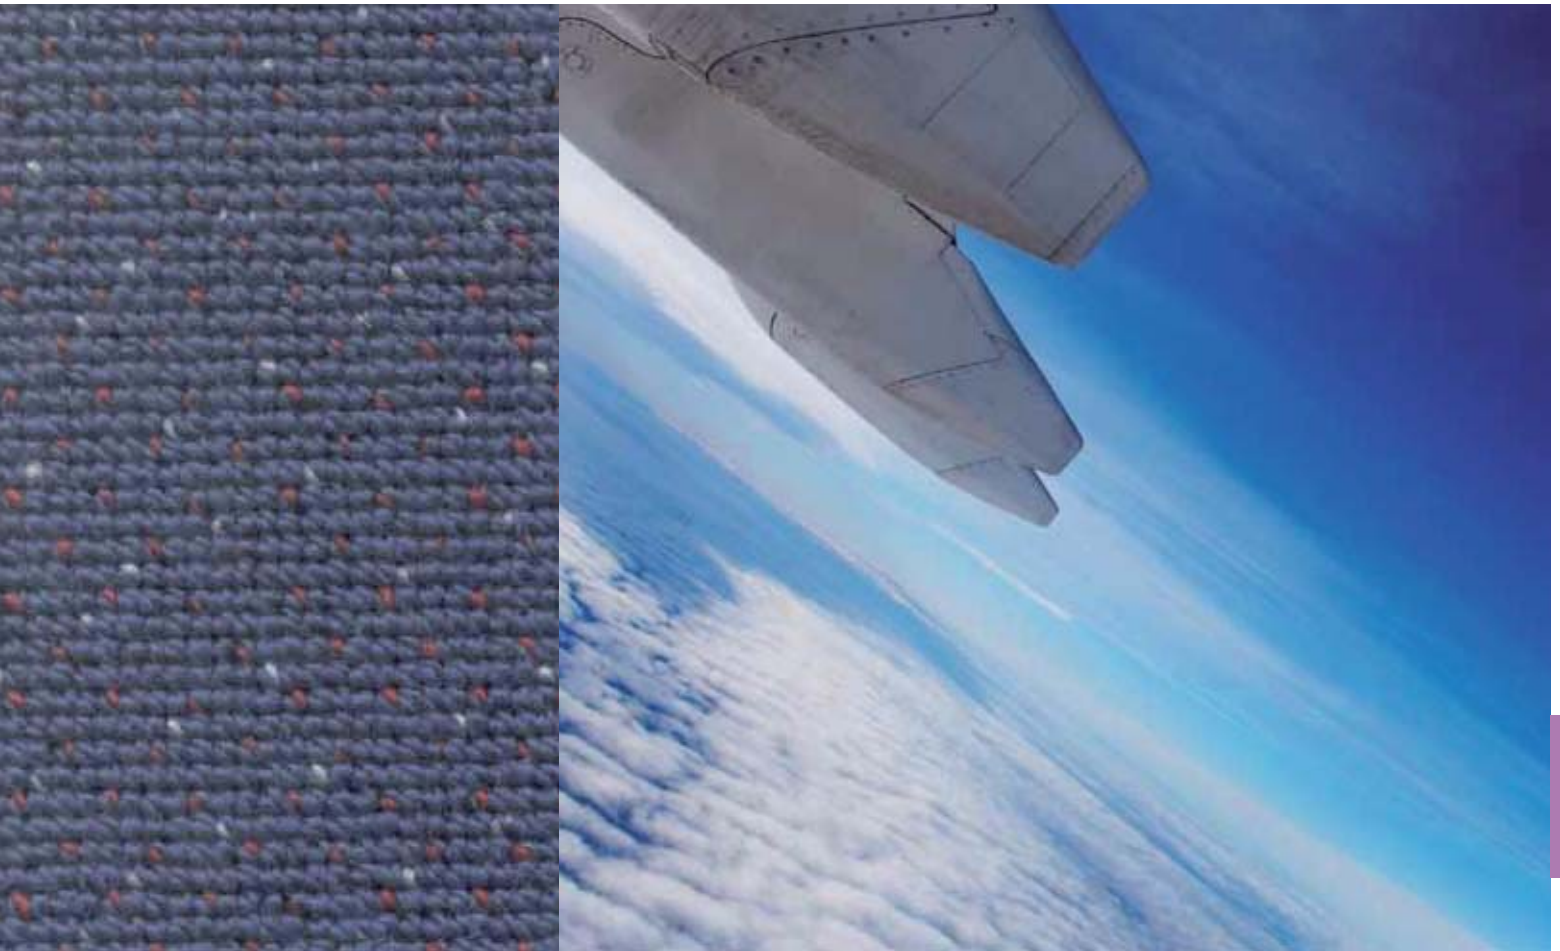

Wilton is a highly prestigious carpet manufactured on traditional weaving looms. The unique weaving process allows for cut pile, loop pile and cut/loop combinations that can achieve stunning pattern effects. Wilton carpets offer maximum durability and can be specified in the most demanding hospitality applications.





INSTALLATION AND MAINTENANCE OF DESSO PRODUCTS

Desso carpet and carpet tiles have been manufactured with the greatest care. Upon leaving our factory, you can rest assured that Desso products meet all specifications described in the relevant product documentation. Desso carpet and carpet tiles, however, only really come to life when installed. To ensure proper installation it is of vital importance that the installation instructions described by Desso are followed carefully. Only then can you ensure optimum results.

To be able to enjoy Desso products to their full potential, proper maintenance is crucial.

Installation and maintenance instructions of all Desso products can be found on www.desso.com, or with your local representative.

Should you have any additional questions on installation and maintenance of Desso's products, our Technical Services Department will be happy to help you.



AirMaster®	24
Arcade	26
Capella	28
City	30
Entry	32
Essence	34
Flavia	36
Flow	38
Flux	40
Forto	42
Freestyle	44
Gravel Line	46
Gravel Motive	48
Gravel Structure	50
Halo	52
Libra Grooves	54
Libra Lines	56
Lita	58
Lupo	60
Manhattan	62
Menda	64
Mila	66
Neo / Neo Core	68
Palatino	70
Pallas	72
Patches	74
Pinto 580	76
Protect	78
Pure	80
Reclaim Ribs	82
Sand	84
Sand Stripe	86
Scape	88
Sienna	90
Stratos	92
Supira	94
Tempra	96
Torso	98
Trapez	100
Tree	102
Twist	104
Verso	106
Verso Bars	108
Verso Grid	110



Alumina	112
Asteranne	114
Arcade	116
Atelier	118
Chanelle	120
Chinchilla	122
City	124
Contessa	126
Elegance	128
Essence	130
Excel	132
Flux	134
Forum	136
Gravel Line	138
Gravel Motive	140
Gravel Structure	142
Hint	144
Inova Twin	146
Marathon	148
Mila	150
Palatino	152
Palesse	154
Pallas	156
Perfect	158
Select	160
Sparx	162
Steel	164
Tempra	166
Torso	168
Trapez	170
Trax	172
Typo	174



Rodin	176
Wilton in Grey	178
Wilton in Ribs	180
Wilton Metallic	182
Wilton Profile	184

Axminster Woven	186
Gravure	188
Symphony á la carte	190
Wilton Woven	192

Carpet Tiles



Broadloom



Woven



Custom Made

Contact information

Headquarters Desso

Taxandriaweg 15
5142 PA Waalwijk
The Netherlands

T: +31 (0)416 684 100
F: +31 (0)416 335 955
www.desso.com

Hospitality, Marine, Aviation

Taxandriaweg 15
5142 PA Waalwijk
P.O. Box 169
5140 AD Waalwijk
The Netherlands

T: +31 (0)416 684 100
F: +31 (0)416 335 955

Address (Production)

R. Ramlotstraat 89
9200 Dendermonde
Belgium

T: +32 (0)52 262 411
F: +32 (0)52 221 767

Consumer Carpets

Taxandriaweg 15
5142 PA Waalwijk
P.O. Box 169
5140 AD Waalwijk
The Netherlands

T: +31 (0)416 68 42 45
F: +31 (0)416 68 42 67

Sports Systems

R. Ramlotstraat 89
9200 Dendermonde
Belgium

T: +32 (0)52 262 411
F: +32 (0)52 221 767

Showrooms

Netherlands

Taxandriaweg 15
5142 PA Waalwijk
The Netherlands

T: +31 (0)416 684 100
F: +31 (0)416 335 955
info@desso.com

France

Parc du pont de Flandre
11 Rue de Cambrai
F-75 019 Paris
France

T: +33 155 26 39 39
F: +33 155 26 39 40
service-fr@desso.com

London

23-25 Great Sutton Street
London EC1V 0DN
United Kingdom

T: +44 20 7324 5500
F: +44 20 7324 5510
service-uk@desso.com

Middle East

Sultan Ali Al - Owais Building
SATWA
PO Box 24310
Dubai

T: +971 439 859 00
F: +971 439 859 08
service-mea@desso.com

Poland

Plac Pilsudskieg 1
00-078 Warszawa

T: +48 22 331 32 22
F: +48 22 331 32 23
service-pl@desso.com

Russia

Pokrovka Street 33/22
Office 418
Moscow 105062

T: +7 495 225 9408
F: +7 495 225 9409
service-ru@desso.com

Sales offices and dealers (for complete addresses of our global sales offices, please visit www.desso.com)

Albania, Croatia & Balkens

T: +385 1615 55 50
service-hr@desso.com

China (Southern)

M: +86 13 801 884 918
service-china@desso.com

Japan

T: +81-3-3274-3303
service-japan@desso.com

South Africa

T: +31 416 684 125
info@desso.co.za

Asia

T: +31 416 684 229
service-asia@desso.com

China (Northern)

M: +86 13 501 064 621
service-china@desso.com

Mexico

T: +52 1(55) 4140 6688
service-me@desso.com

Spain

T: +34 91436 1805
service-es@desso.com

Argentina

T: +54 (911) 6908 0081
service-latam@desso.com

Colombia

T: +57 (0)310 222 7965
service-co@desso.com

Middle East

T: +971 439 859 00
service-mea@desso.com

Sweden/Finland

T: +46 853 188 052
support@ardbogolv.se

Austria

T: +43 1 716 44-0
office@ambiente-textil.at

Czech Republic

T: +42 0774 993 723
service-cz@desso.com

Norway

T: +47 241 597 16
service-no@desso.com

Switzerland

T: +41 55 645 21 11
service-ch@desso.com

Australia

T: +617 3881 1777
sales@gjibongroup.com.au

Denmark

T: +45 383 231 55
service-dk@desso.com

Poland

T: +48 22 331 32 22
service-pl@desso.com

The Netherlands

T: +31 416 342 005
service-nl@desso.com

Belgium & Luxemburg

T: +32 522 62 480
service-be@desso.com

France

T: +33 155 26 39 39
service-fr@desso.com

Portugal

T: +35 1 229 828 110
service-pt@desso.com

Turkey

T: +90 212 287 61 58
service-tr@desso.com

Brazil

T: +55 11 9600 3864
service-br@desso.com

Germany

T: +49 6122 58 73 410
service-de@desso.com

Romania

T: +48 660 490 160
service-ro@desso.com

United Kingdom

T: +44 1235 554 848
service-uk@desso.com

Bulgaria

T: +48 660 490 160
service-bg@desso.com

Hungary

T: +36 1 250 1420
service-hu@desso.com

Russia/Baltics

T: +7 495 225 9408
service-ru@desso.com

USA

T: +1 203 202 7650
service-us@desso.com

Central America/Andean/Carribbean

T: +57 1 618 0537
service-latam@desso.com

Italy

T: +39 028 945 61 51/54
service-it@desso.com

Slovakia

T: +42 0774 993 723
service-sk@desso.com

About Desso®

Desso focuses primarily on superior floor design and Cradle to Cradle®, in providing high quality carpet tiles and broadloom. It's commercial product offering, business carpets, represents more than half of total sales and can be found in offices, banks, retail units, public buildings, schools, universities and care centers. Clients include Allianz, Canon, EDF, HSBC, Porsche, Procter & Gamble, SNCF, Nestlé and many more.

Desso's innovation strategy is concentrated in 3 key areas: Creativity, Functionality and Cradle to Cradle®. For Desso, creativity is synonymous with CARPETECTURE®, which is a powerful example of Desso's commitment to creative carpet design and its dedication to meet the needs of architects, interior designers, building owners and end users. In the field of functionality, Desso develops pioneering solutions that make a difference for health, wellness and well-being. As a result of this innovation and creativity strategy, Desso has launched a number of patented products like DESSO AirMaster®, for 8 times lower fine-dust concentration in the air (versus hard floors), and DESSO EcoBase®, which enabled the world's first and only Cradle to Cradle® Silver Certification for an entire carpet tile product.

Desso Consumer Carpets is represented by three strong brands: Parade, Bonaparte and Desso. All with a rich history in manufacturing high-end consumer carpets where products are available through specialist retail traders, plus selected carpet stores and home furnishing shops. Desso Consumer Carpets is the only European high end consumer carpet company with sales in Benelux, Germany, France, Switzerland and Austria.

Desso's creative carpet design and service oriented approach means that it has become a leader in developing solutions for the Hospitality, Marine and Aviation (HMA) markets. Desso's HMA division works with companies such as Hilton, Intercontinental, Maritime, KLM, Virgin, Royal Caribbean Cruise Lines and Holland America Line.

Desso Sports Systems is a leading player in the provision of artificial turf for sports fields and reinforced natural grass systems that provide the perfect surface at every level of sport. Our product range includes DESSO GrassMaster®, a sports field of 97% natural grass reinforced with Desso synthetic grass fibres.

Cradle to Cradle®

In signing a partnership agreement with the Hamburg-based Environmental Protection Encouragement Agency (EPEA), Desso has become the first carpet manufacturer in EMEA to adopt the Cradle to Cradle® design. It marks Desso's radical decision to move beyond 'mere' sustainability in producing its carpets and artificial grass. In the Cradle to Cradle® principles, products are made from pure components that are easy to disassemble, in order to create new products (= up-cycling) in both the biological and technical cycles.

Today, Desso can look back on almost 80 years of proven performance, having built a reputation as a leading manufacturer of high quality carpet tiles, broadloom and artificial grass pitches. Desso has four factories and two major distribution centres in Europe, as well as specialist customer service centres throughout Europe, in America, Asia, Latin America, Africa, the Middle East and Australia.

For more information visit www.desso.com